


1	General information	Supplier's name or trade mark	INSPIRE		
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN		
3		Model Identifier - Luminaire Supplier reference	DLT2-CD-2R50C WT; DLT2-CD-2R50C BK		
4		Light sources maker model	DLT2-CD-2R50CMC		
5		Date of placement on the market	27/02/2023		
6	Type of light source:	Lighting technology used:	LED		
7		Light source cap type (or other electric interface)	Terminal connector		
8		Non-directional (NDLS) or directional (DLS):	NDLS		
9		Mains (MLS) or non-mains (NMLS):	NMLS		
10		Connected light source (CLS):	no		
11		Colour-tuneable light source:	no		
12		Envelope:	no		
13		High luminance light source:	no		
14		Anti-glare shield:	no		
15		Dimmable:	no		
16	General product parameters:	Energy consumption in on-mode (kWh/1000 h)	5	kWh/1000h	
17		Energy efficiency class	D		
18		Useful luminous flux (Φ_{use}) , indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°), expressed in Lm	730/760	360	
19		Correlated colour type	steps		
20		Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700/4000	K	
21		On-mode power (P_{on}), expressed in W and rounded to the first decimal	5.0	W	
22		Standby power (P_{sb}), expressed in W and rounded to the second decimal	0.00	W	
23		Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0.00	W	
24		Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80		
25		Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)			
26			Height (mm)	2.00	mm
27			Width (mm)	38.00	mm
28			Depth (mm)	40.00	mm
29			Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution + name of picture+extension (.jpeg))	DLT2-CD-2R50C WT&DLT2-CD-2R50C BK_Spectral power distribution.jpeg 	
30		Claim of equivalent power	yes		
31		If yes, equivalent power (W)	55	W	
32		Chromaticity coordinates (x and y)	2700K: 0.458; 0.410 4000K: 0.380; 0.380		
33	Parameters directional light sources:	Peak luminous intensity (cd)		cd	
34		Beam angle in degrees (no decimal), or the range of beam angles that can be set		Degrees	
35	Parameter for LED and OLED light sources:	R9 colour rendering index value	0		
36		Survival factor rounded to the second decimal (>0.xx)	0.90		
37		Lumen maintenance factor rounded to the second decimal (>0.xx)	0.97		
38	Parameters for LED and OLED mains lights sources:	displacement factor (cos ϕ_1) rounded to the second decimal			
39		Colour consistency in McAdam ellipses			
40		Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-		
41		If yes then replacement claim (W) (no decimal)		W	
42		Flicker metric (Pst LM) rounded to the first decimal			
43		Stroboscopic effect metric (SVM) rounded to the first decimal			
44	Technical documentation name (in case of light source product)				
45	Light source removing instruction name (in case of containing product)		DLT2-CD-2R50C WT&DLT2-CD-2R50C BK_LS removing instruction.pdf		

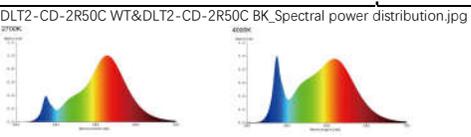

Light source removing instruction

Creation date (dd/mm/yyyy) :

11/18/2022

Last update date (dd/mm/yyyy) :

11/18/2022

1	General information	Supplier's name or trade mark	INSPIRE
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN
3		Model Identifier - Luminaire Supplier reference	DLT2-CD-2R50C WT; DLT2-CD-2R50C BK
4		Light sources maker model	<i>DLT2-CD-2R50CMC</i>

Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimise their power consumption during light source testing

		Explanation of the step	Pictures	Tools
Step 1		Loosen the screw using the screwdriver.		Screwdriver
Step 2		Open the connection box in the arrow direction marked on the connection box.		Hand
Step 3		Push the connector and pull out the wires.		Hand
Step 4		Driver was separated from the lamp body.		N.A.