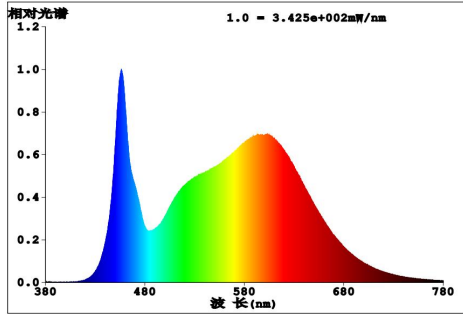


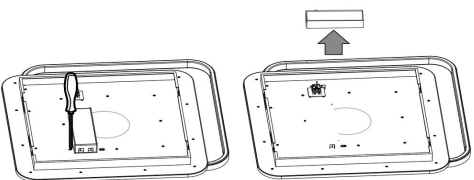
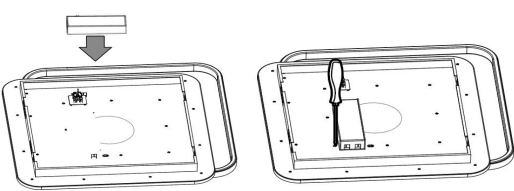
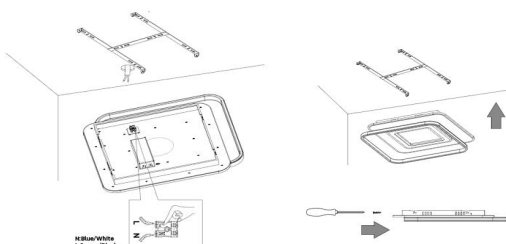


		PRODUCT INFORMATION SHEET (ANNEX 5)		Creation date (dd/mm/yyyy) : 19/05/2023	
				Last update date (dd/mm/yyyy) : 19/05/2023	
1	General information	Supplier's name or trade mark		XIAMEN GUANG PU ELECTRONICS CO.,LTD	
2		Supplier's address		ADEO Services, 135 rue Sadi Carnot - CS00001, 59790 RONCHIN	
3		Model Identifier - Luminaire Supplier reference		GPCL-G50-S48-100-811-yy-L2-A	
4		Light sources maker model		GPCL-G50-S48-100-811-SH-L2-A	
5		Date of placement on the market		14/06/2023	
6	Type of light source:	Lighting technology used:		LED	
7		Light source cap type (or other electric interface)		/	
8		Non-directional (NDLS) or directional (DLS):		NDLS	
9		Mains (MLS) or non-mains (NMLS):		NMLS	
10		Connected light source (CLS):		no	
11		Colour-tuneable light source:		no	
12		Envelope:		no	
13		High luminance light source:		no	
14		Anti-glare shield:		no	
15		Dimmable:		second	
16	General product parameters:	Energy consumption in on-mode (kWh/1000 h)		82	KWh/1000h
17		Energy efficiency class		D	
18		Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°), expressed in Lm		13500	360
19		Correlated colour type		range	
20		Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set		4000	K
21		On-mode power (P_{on}), expressed in W and rounded to the first decimal		82.0	W
22		Standby power (P_{stb}), expressed in W and rounded to the second decimal		0.00	W
23		Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		0.00	W
24		Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set		80	
25		Outer dimensions without separate control gear, lighting control parts and nonlighting control parts, if any (millimetre)			
26		Height (mm)		940.3 + 977.6 + 1702.7 + 1791.3mm	
27		Width (mm)		6.00mm	
28		Depth (mm)		1.00mm	
29		Spectral power distribution in the range 250 nm to 800 nm, at full-load (insert picture of the spectral power distribution + name of picture+extension (.jpeg))		GPCL-G50-S48-100-811-SH-L2-A_spectral power distribution_17.jpg 	
30		Claim of equivalent power		yes	
31		If yes, equivalent power (W)		1807	W
32		Chromaticity coordinates (x and y)		"0.3800;0.3800"	
33	Parameters for directional light sources:	Peak luminous intensity (cd)		cd	
34		Beam angle in degrees (no decimal), or the range of beam angles that can be set		Degrees	
35	Parameter for LED and OLED light sources:	R9 colour rendering index value			
36		Survival factor rounded to the second decimal (>0.xx)		0.90	
37		Lumen maintenance factor rounded to the second decimal (>0.xx)		0.96	
38	Parameters for LED and OLED mains lights sources:	displacement factor (cos ϕ 1) rounded to the second decimal		-	
39		Colour consistency in McAdam ellipses		-	
40		Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-	
41		If yes then replacement claim (W) (no decimal)		W	
42		Flicker metric (Pst LM) rounded to the first decimal		-	
43		Stroboscopic effect metric (SVM) rounded to the first decimal			
44	Technical documentation name (in case of light source product)				
45	Light source removing instruction name (in case of containing product)		GPCL-G50-S48-100-811-SH-L2-A_LS removing instruction		

1	General information	Supplier's name or trade mark	INSPIRE
2		Supplier's address	ADEO Services, 135 rue Sadi Carnot - CS0001, 59790 RONCHIN
3		Model Identifier - Luminaire Supplier reference	GPCL-G50-S48-100-811-yy-L2-A
4		Light sources maker model	GPCL-G50-S48-100-811-SH-L2-A

Instructions on how to remove lighting control parts and/or non-lighting parts, if any, or how to switch them off or minimise their power consumption during light source testing

	Explanation of the step	Pictures	Tools
Step 1	Turn off the power		By hand
Step 2	Remove the luminaire from the ceiling		
Step 3	Remove the driver from the lamp		
Step 4	Install a new driver		
Step 5	Install the lamp to the ceiling and connect the power cord		

Step 6	After powering on, the lamp can be used normally		By hand
Step 7			
Step 8			

