

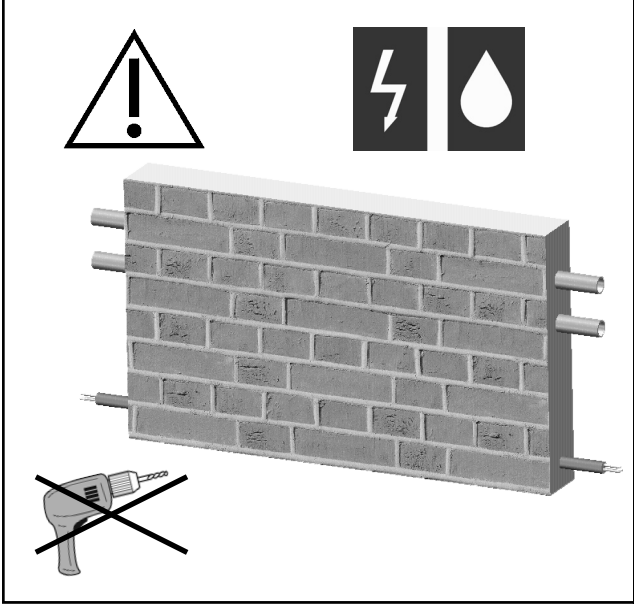


40005964

Instructions de montage 31/01/20 PVA

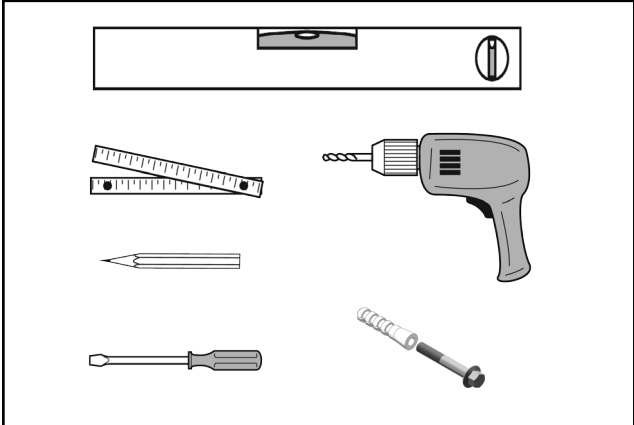



Purgeur à jet orientable:
Serrez modérément le purgeur sur le radiateur pour faire étanchéité à l'aide du joint torique (15 Nm max).

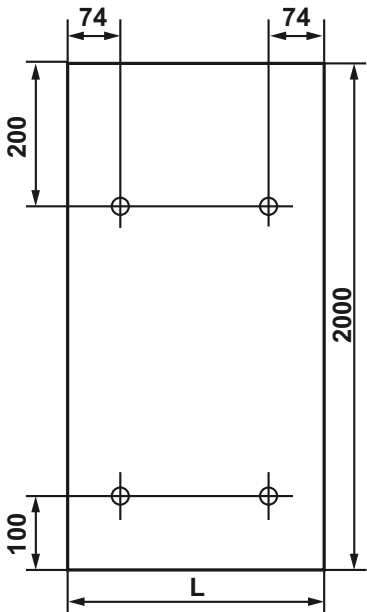

- 4010-0040 (C)

4010-0050 (C)
- 4020-0060 (C)


4020-0070 (C)

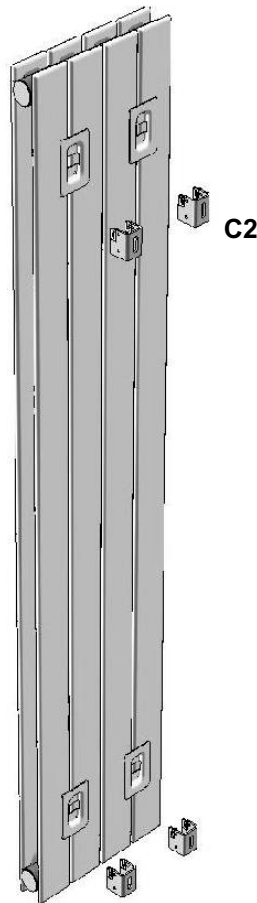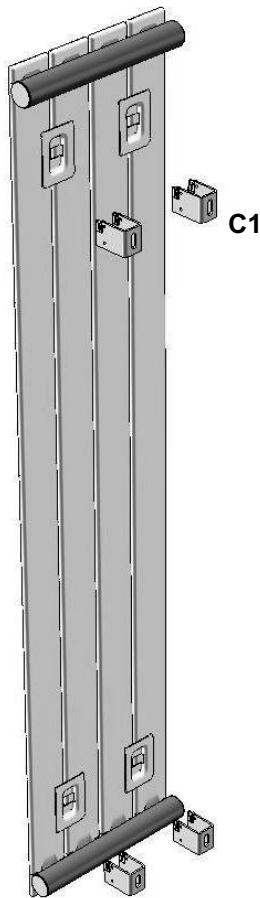


Réf.	L (mm)	P (kg)
4010 0040 (C)	444	19,90
4010 0060 (C)	592	26,40

Réf.	L (mm)	P (kg)
4020 0060 (C)	444	38,40
4020 0070 (C)	592	51,10


4040-0035
4042-0050

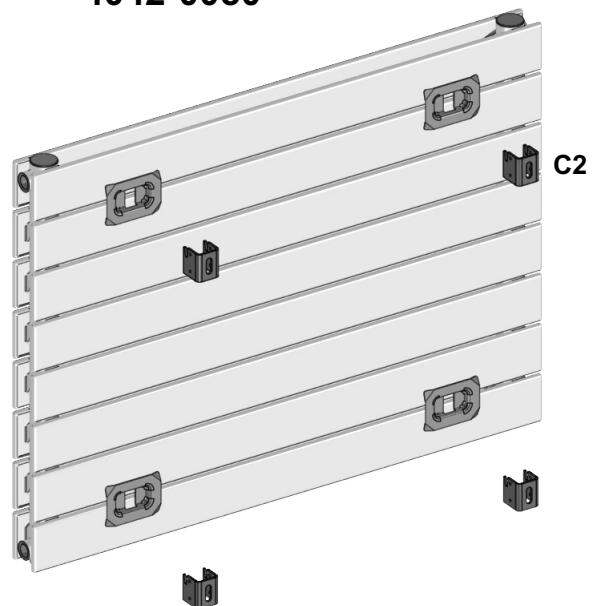


1

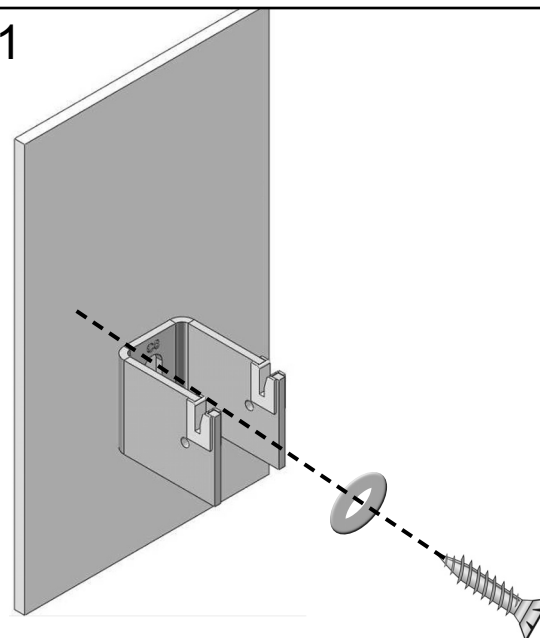

Option

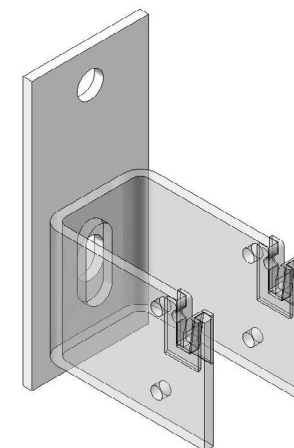


Fixations pour mur creux
et friables

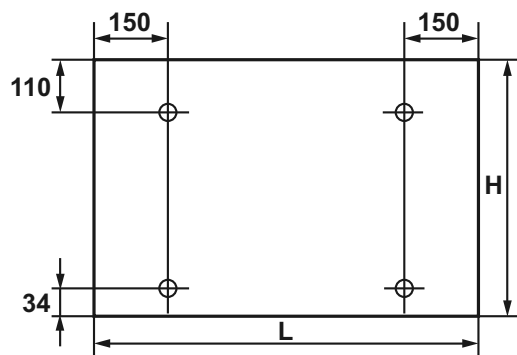


Réf.	L (mm)	H (mm)	P (kg)
4040-0035	800	592	20,40
4042-0055	1000	740	31,80


2

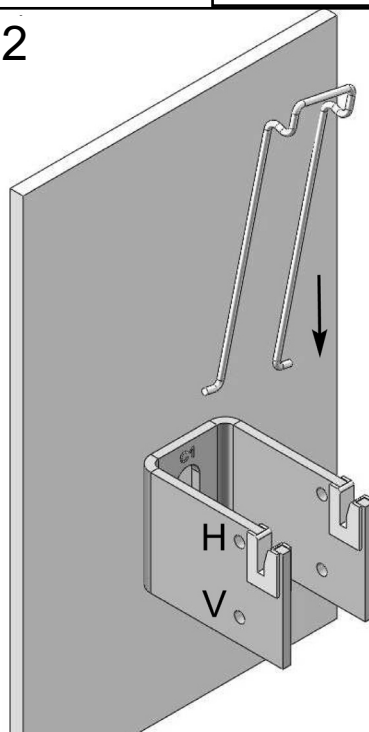

3

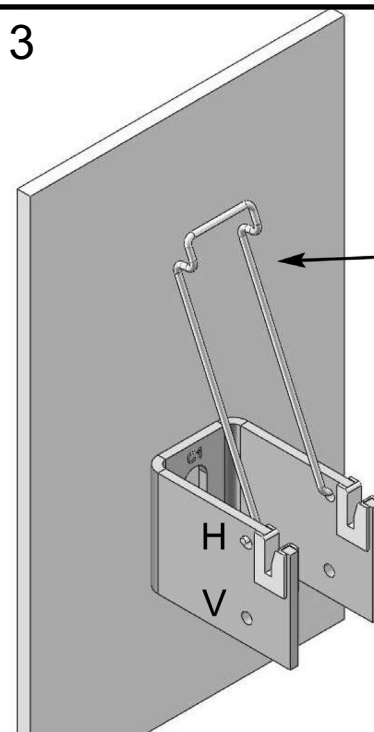

4

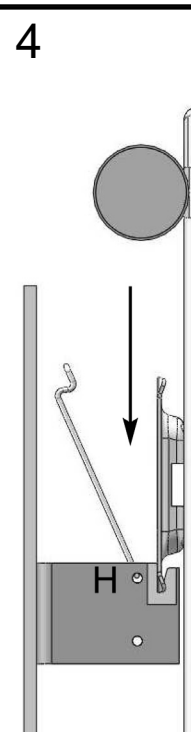

5

