

ECO CLIMATE REGLETTE ETANHCHE



Caractéristiques du produit

- Conçu pour l'installation de surface dans les environnements industriels, commerciaux et autres avec des besoins de luminaire linéaire étanche.
- Diffuseur Opal pour plus d'uniformité et de confort visuel.
- Fabrication de polycarbonate, avec connecteur étanche M20 In-Line IP68 aux deux extrémités.
- Luminaire avec possibilité de connexion continue.





Détail Conector In-Line IP68

IP65	IK08	30K Horas	4000K BLANC NEUTRE	5000K BLANC FROID	FINI GRIS	3 Ans Garantie
------	------	--------------	--------------------------	-------------------------	--------------	----------------------

CAT. NE.	COULEUR (K)	DRIVER	LUMINAIRE (LUMENS)	PUISSANCE (W)	EFFICACITÉ (Lm/W)
ECLS6G14S40	4000	Standard	1440	12	120
ECLS12G28S40	4000	Standard	2880	24	120
ECLS15G40S40	4000	Standard	3960	33	120
ECLS6G14S50	5000	Standard	1440	12	120
ECLS12G28S50	5000	Standard	2880	24	120
ECLS15G40S50	5000	Standard	3960	33	120
ECLS6G25S40	4000	Standard	2520	21	120
ECLS12G48S40	4000	Standard	4800	40	120
ECLS15G66S40	4000	Standard	6600	55	120
ECLS15G78S40	4000	Standard	7800	65	120
ECLS6G25S50	5000	Standard	2520	21	120
ECLS12G48S50	5000	Standard	4800	40	120
ECLS15G66S50	5000	Standard	6600	55	120
ECLS15G78S50	5000	Standard	7800	65	120

Dimensions Affichage Simple et Double

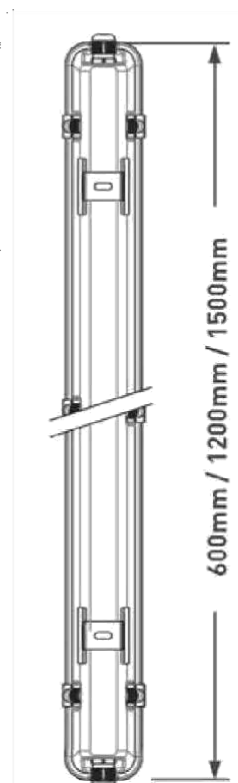

CAT NE.	POIDS (kg)	CRI	FECUENCIA (Hz)	RATIO IK	RANG TEMP. (°C)	DURÉE DE VIE FACTEUR L/B	MAX. CC
ECLS6G14S40	0.68	>80	50	IK08	-20 +45	L70 /B50	40
ECLS12G28S40	1.28	>80	50	IK08	-20 +45	L70 /B50	35
ECLS15G40S40	1.67	>80	50	IK08	-20 +45	L70 /B50	25
ECLS6G14S50	0.68	>80	50	IK08	-20 +45	L70 /B50	40
ECLS12G28S50	1.28	>80	50	IK08	-20 +45	L70 /B50	35
ECLS15G40S50	1.67	>80	50	IK08	-20 +45	L70 /B50	25
ECLS6G25S40	0.68	>80	50	IK08	-20 +45	L70 /B50	20
ECLS12G48S40	1.28	>80	50	IK08	-20 +45	L70 /B50	20
ECLS15G66S40	1.67	>80	50	IK08	-20 +45	L70 /B50	15
ECLS15G78S40	1.67	>80	50	IK08	-20 +45	L70 /B50	10
ECLS6G25S50	0.68	>80	50	IK08	-20 +45	L70 /B50	20
ECLS12G48S50	1.28	>80	50	IK08	-20 +45	L70 /B50	20
ECLS15G66S50	1.67	>80	50	IK08	-20 +45	L70 /B50	15
ECLS15G78S50	1.67	>80	50	IK08	-20 +45	L70 /B50	10

RÉGLEMENTATION	DESCRIPTION
EN 60598-1	Luminaire – General requirements
EN 60598-2-1	Luminaire - Fixed general purpose
EN 60598-2-22	Luminaire - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 55015 EN 61547 EN 62471	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
2002/96/EC	Equipment for general lighting purposes - EMC immunity requirements
2011/65/EU	Photobiological safety of lamps and lamp systems
(EC) No 1907/2006	Waste Electrical & Electronic Equipment (WEEE)
	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

