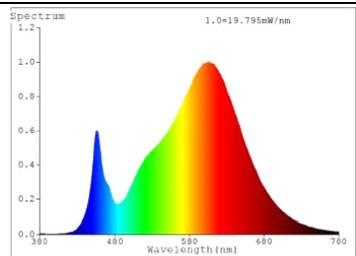


EAN	<b>3276007761931</b>
Supplier's name or trade mark	<b>INSPIRE</b>
Date of placement on the market (YYYY-MM-DD)	
Light sources maker model	<b>TB-7C</b>
EPREL Registration number	<b>1900327</b>
Link to EU Product Data base	<a href="https://eprel.ec.europa.eu/screen/product/lightsources/1900327">https://eprel.ec.europa.eu/screen/product/lightsources/1900327</a>
Lighting technology used	<b>LED</b>
Non-directional (NDLS) or directional (DLS)	<b>NDLS</b>
Light source cap-type	<b>--</b>
Mains (MLS) or non-mains (NMLS)	<b>NMLS</b>
Connected light source (CLS)	<b>No</b>
Colour-tuneable light source	<b>No</b>
High luminance light source	<b>No</b>
Anti-glare shield	<b>No</b>
Dimmable	<b>yes</b>
Energy consumption in on-mode (kWh/1000h)	<b>6</b>
Useful luminous flux (lm)	<b>1037</b>
Beam angle correspondence (degrees)	<b>360</b>
Energy Efficiency Class	<b>C</b>
Correlated colour temperature type (K)	<b>steps</b>
Correlated colour temperature (K)	<b>3000</b>
Correlated colour temperature (K)	<b>4500</b>
Correlated colour temperature (K)	<b>6000</b>
Correlated colour temperature (K)	
On-mode power (W)	<b>5,5</b>
Standby power (W)	<b>N/A</b>
Colour rendering index	<b>80</b>
Outer dimensions (Height) (millimetre)	
Outer dimensions (Width) (millimetre)	
Outer dimensions (Depth) (millimetre)	
Spectral power distribution in the range 250 nm to 800 nm. at full-load	
Spectral power distribution (picture name)	<b>Spectral Power Distribution - TB-7C.jpg</b>
Claim of equivalent power	<b>No</b>
Chromaticity coordinate (x)	<b>0,463</b>
Chromaticity coordinate (y)	<b>0,420</b>
R9 Colour rendering index	<b>1</b>
Survival factor	<b>0,90</b>
Lumen maintenance factor	<b>0,96</b>