

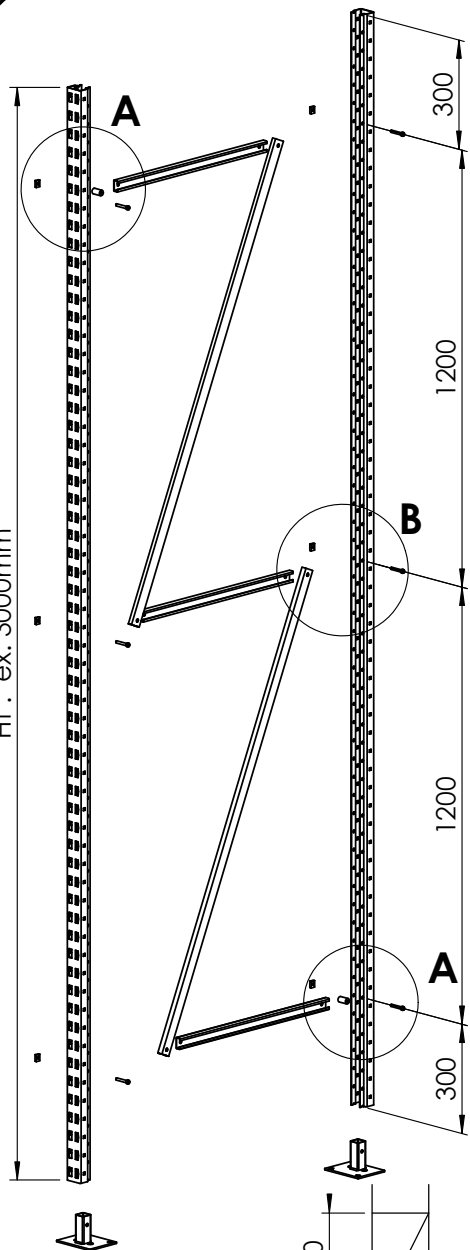


PRORACK+


Ht : ex. 3000mm

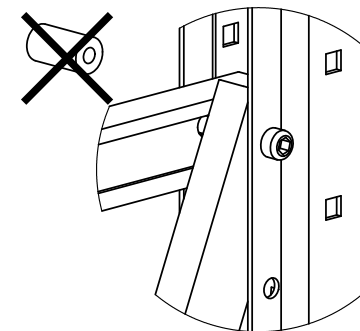

Détail A

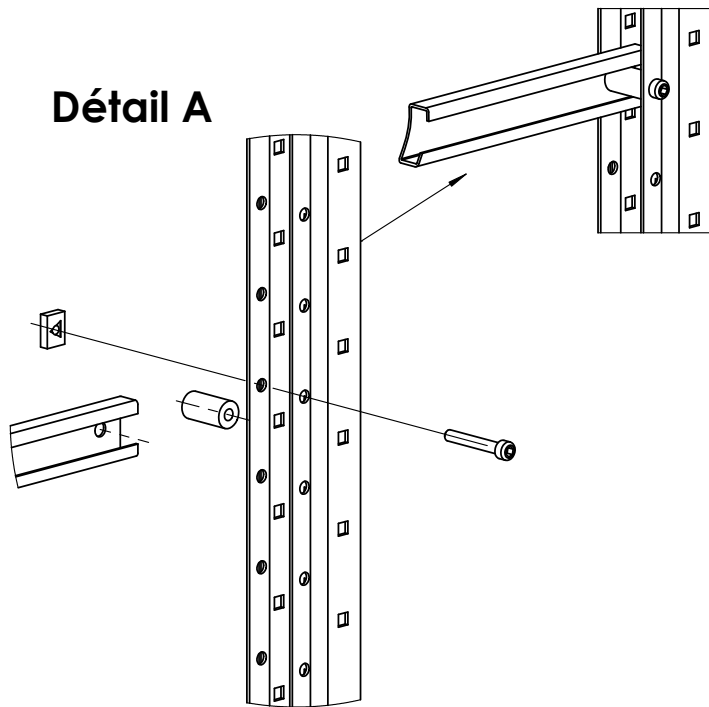

Détail B


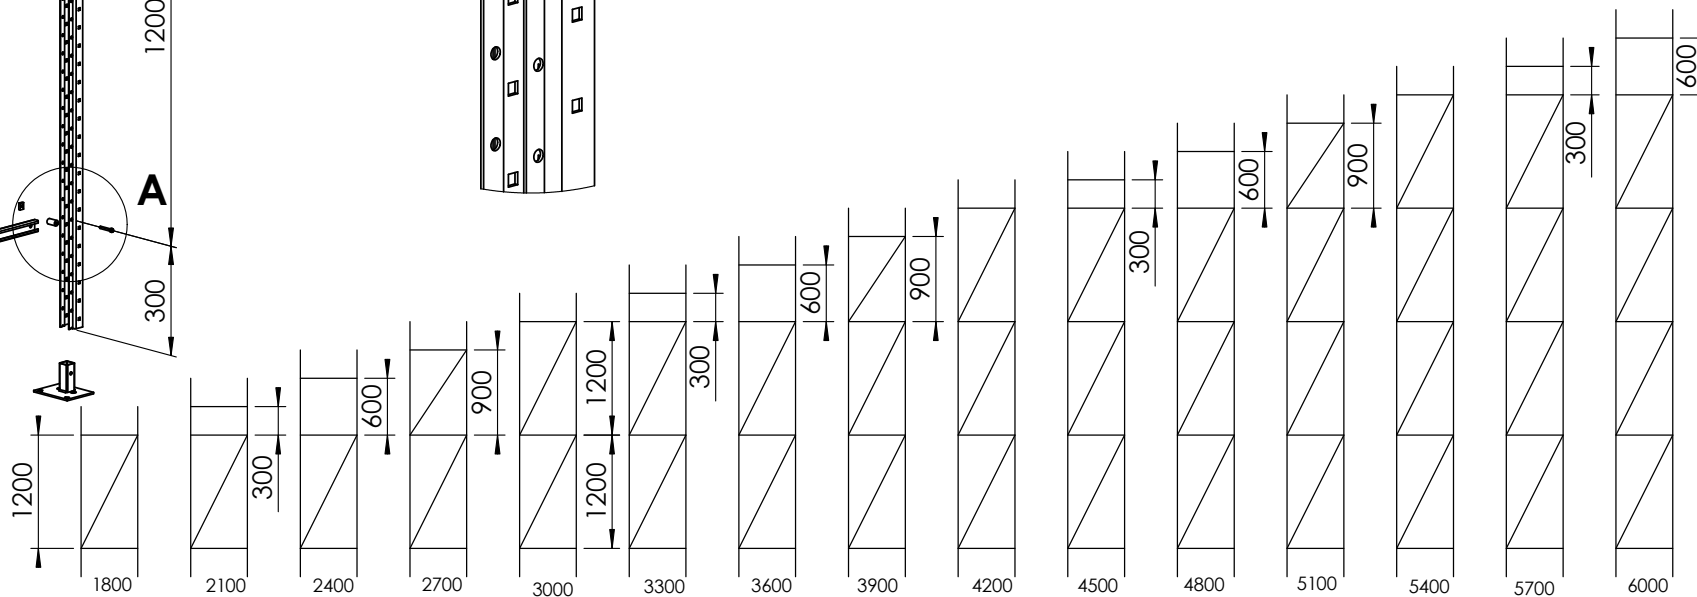


CANTILEVER DEMONTABLE


SIMPLE FACE

2 DOUBLE FACE



1

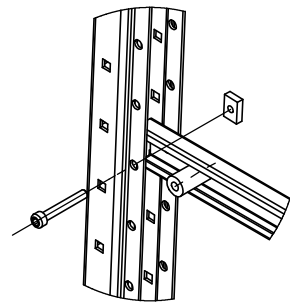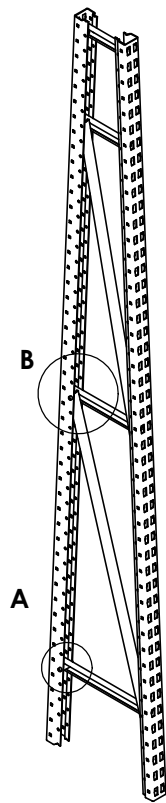





Détails A

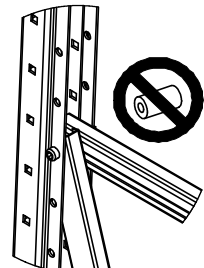


Détail B

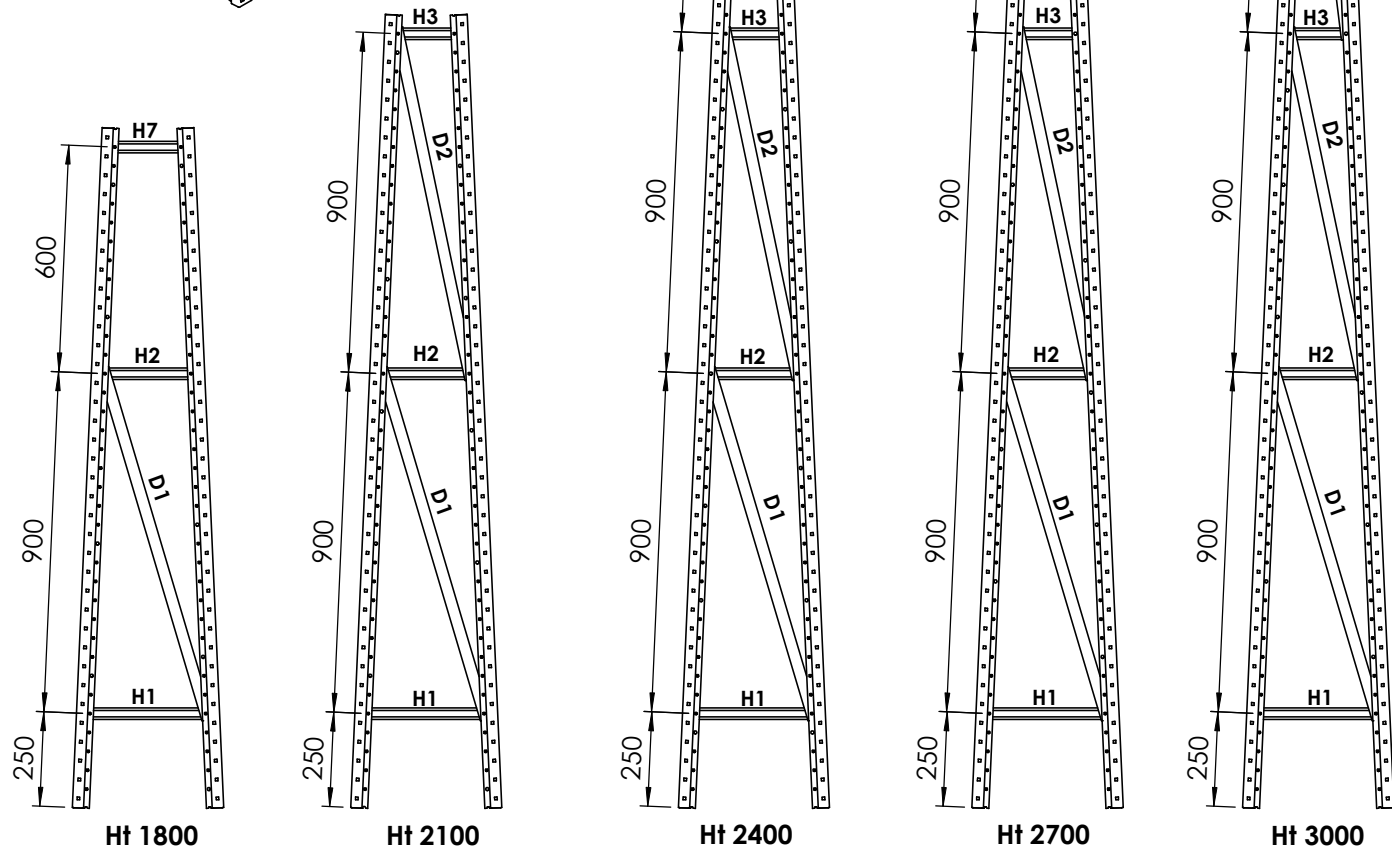



Longueur entretoise	Ht 1800	Ht 2100	Ht 2400	Ht 2700	Ht 3000	Repère
101					1	H4
127				1		H5
153			1			H6
179		1	1	1	1	H3
205	1					H7
258	1	1	1	1	1	H2
336	1	1	1	1	1	H1
936					1	D3
949		1	1	1	1	D2
968	1	1	1	1	1	D1

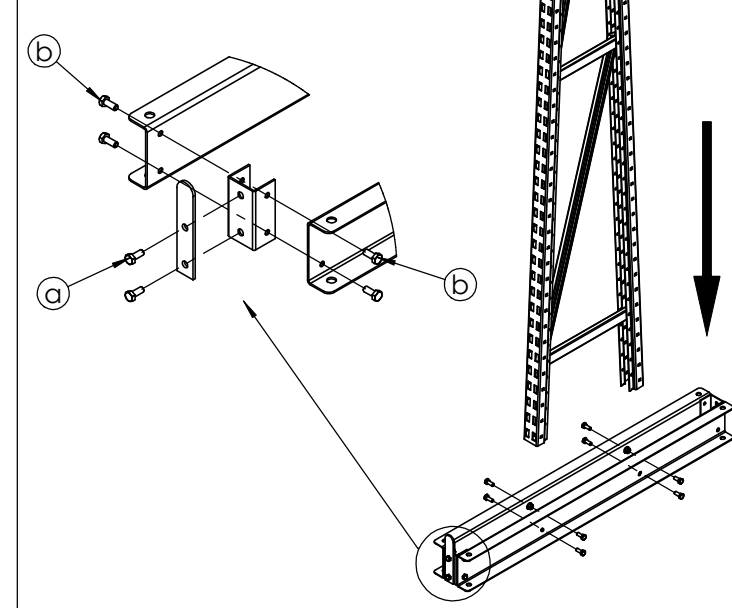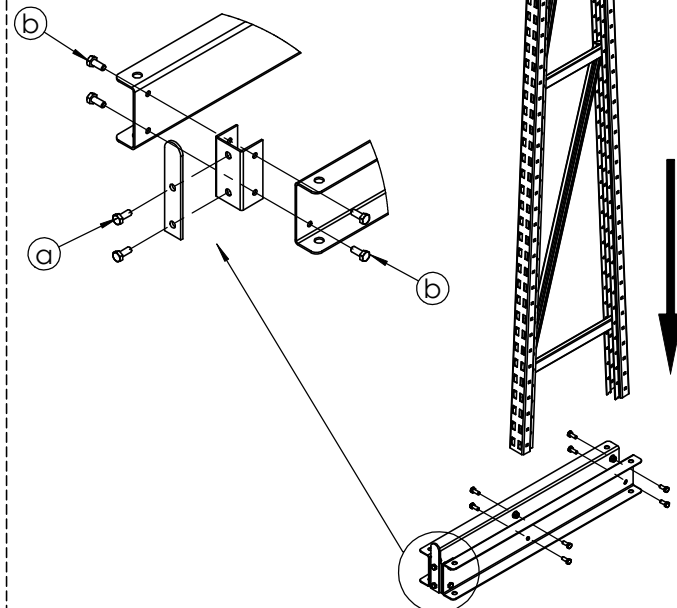

3

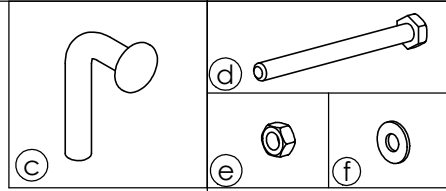

4

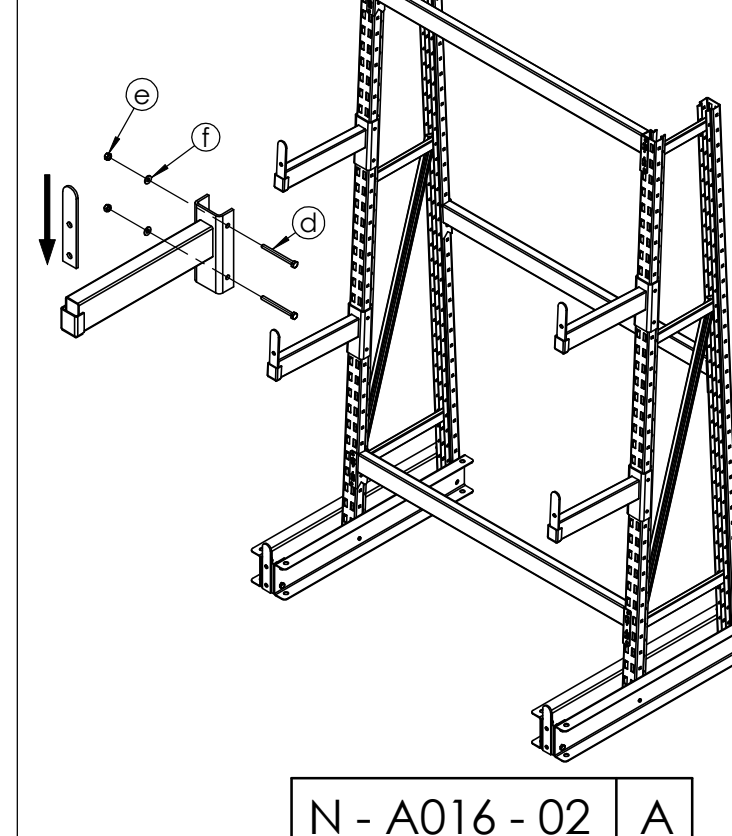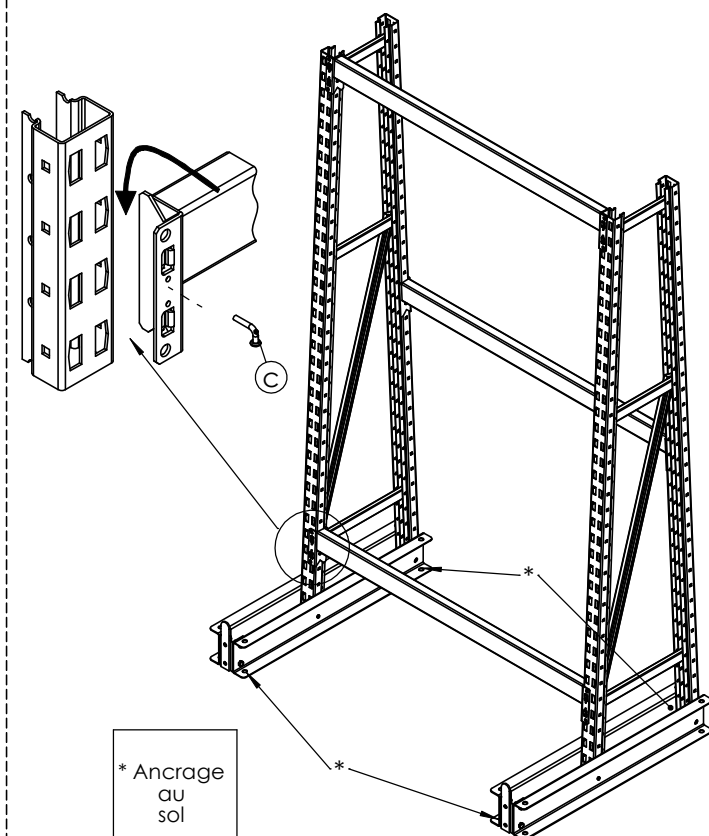

* Ancrage au sol