


| | |
|---|---|
| EAN | 3276007815597 |
| Supplier's name or trade mark | INSPIRE |
| Date of placement on the market (YYYY-MM-DD) | 2025-01-01 |
| Light sources maker model | L-SPL-A1-02-C-V2.0 |
| EPREL Registration number | 0 |
| Link to EU Product Data base | https://eprel.ec.europa.eu/screen/product/lightsources/0 |
| Lighting technology used | LED |
| Non-directional (NDLS) or directional (DLS) | NDLS |
| Light source cap-type | Containing products |
| Mains (MLS) or non-mains (NMLS) | NMLS |
| Connected light source (CLS) | No |
| Colour-tuneable light source | No |
| High luminance light source | No |
| Anti-glare shield | No |
| Dimmable | no |
| Energy consumption in on-mode (kWh/1000h) | 4 |
| Useful luminous flux (lm) | 620 |
| Beam angle correspondence (degrees) | 360 |
| Energy Efficiency Class | D |
| Correlated colour temperature type (K) | steps |
| Correlated colour temperature (K) | 2700 |
| Correlated colour temperature (K) | 4200 |
| Correlated colour temperature (K) | 6500 |
| Correlated colour temperature (K) | |
| On-mode power (W) | 4.0 |
| Standby power (W) | / |
| Colour rendering index | 80 |
| Outer dimensions (Height) (millimetre) | 194.9 |
| Outer dimensions (Width) (millimetre) | 7.5 |
| Outer dimensions (Depth) (millimetre) | 1.05 |
| Spectral power distribution in the range 250 nm to 800 nm. at full-load |  |
| Spectral power distribution (picture name) | Spectral Power Distribution - L-SPL-A1-02-C-V2.0.jpg |
| Claim of equivalent power | No |
| Chromaticity coordinate (x) | 0.3709 |
| Chromaticity coordinate (y) | 0.3600 |
| R9 Colour rendering index | 0 |
| Survival factor | 0.90 |
| Lumen maintenance factor | 0.96 |

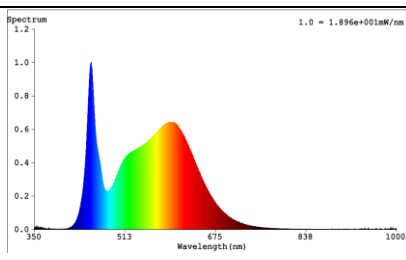