


- 1.Pads must be installed aligned and centered on each face.
- 2.All dimensions in mm.
- 3.Pipes dimensions and tolerances as per NF-EN274-1-12-2002 and discharge pipes OD as per EN476:1997.
- 4.The flatness after assembly does not allow more than 1.0mm gap between the sink and the worktop in any points.
- 5.The seal is always bigger by 1mm minimum to ensure the contact with the worktop after installation.



Matrix code	Ref	Designation	Material grade	Quantity	Weight(kg)	Dimension(mm)	Supplier Reference	Finishings Colour
2025R17P08-0029	1	Sink	SUS304	1	6.46	1160*500*170	2207S	Honey comb

Following general tolerances are applicable to all dimensions without any tolerances indicated specifically on the drawing.

GB/T 1804 -C							
>0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
±0.05	±0.3	±0.5	±0.8	±1.2	±2	±3	±4

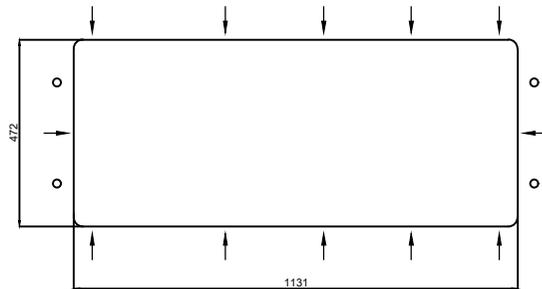

Product/Serie designation (as per Synnertrade/Specs)				Material grade steel SUS304			
GENERAL DRAWING				Thickness of sheet 0.7mm			
2025R17P08-0029							
EAN (update when referencing is done)							
Format A3							
Scale 1:13							
Zuhai Dali Kitchen & Bathroom Technology CO.,Ltd.	V8	25/07/2024	Drawing creation	ShuyunSong		YYY	
Supplier Reference	2207S	Date	Update description	Done by		Checked by	

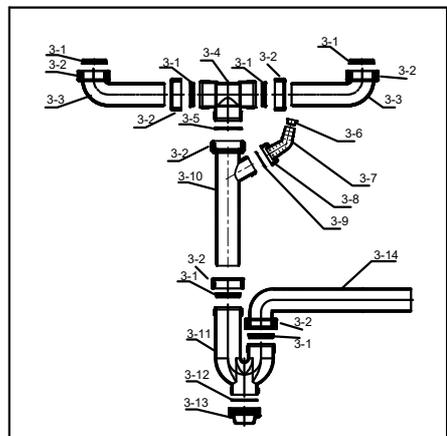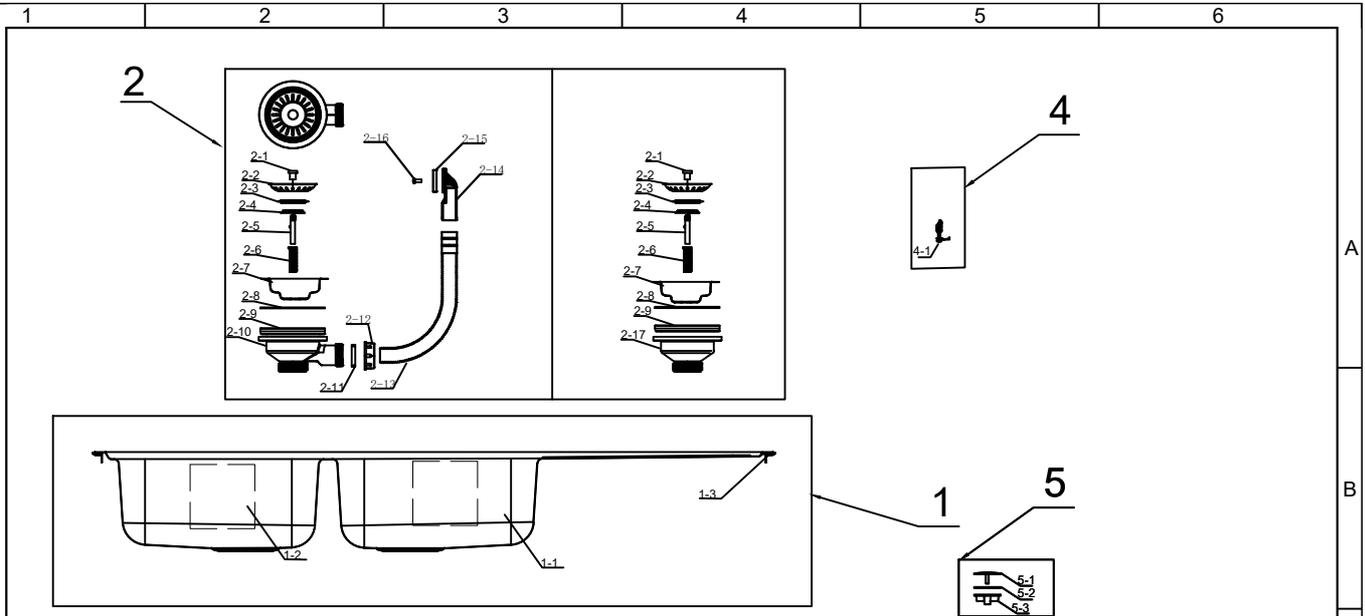

Ref	Designation	Material grade	Quantity	Weight (g)	Dimension(mm)	Finishing Colour
1	Sink	SUS304	1	5436	1160*500*170	Honey comb
1-1	Sink	SUS304	1	4860	1160*500*170	Honey comb
1-2	noise reduction pad	Rubber	9	540	110*110*2	Black
1-3	Embedded seal	Polyurethane foam	1	36	3220	Black
2	Basket waste	SUS304+PP	1	477.2	φ116*300	Polished
2-1	Handle	SUS304	2	11.4	φ15*14.5	Polished
2-2	Filter	SUS304	2	37.2	φ82.5*13	Stain
2-3	silicone	Silicone	2	6.2	φ54*φ35*5	Black
2-4	washer	SUS304	2	13.4	φ41*5	Raw
2-5	Pin	SUS304	2	21	φ8*32	Raw
2-6	Screw	SUS304	2	16	25*15*M12	Raw
2-7	S/S Body	SUS304	2	149	φ114*34.4	Polished
2-8	Sealing ring	Rubber	2	16.2	φ109*φ89*H1.7	Black
2-9	Sealing ring	Rubber	2	54.2	φ110*φ86*H1.2	Black
2-10	Plastic body1	PP	1	46.5	φ116*60	White
2-11	Sealing ring	Silicon	1	1.3	φ34*8.5	Black
2-12	Screw	ABS	1	7.5	φ46.5*10.5	White
2-13	Pipe	PE	1	22.4	φ29.5*300	White
2-14	Pipe	ABS	1	18.3	88*64*25	White
2-15	Sealing ring	PVC	1	7.2	60*36*8	Black
2-16	Overflow cover	SUS304	1	2.9	M5*16	Raw
2-17	Plastic body2	PP	1	46.5	φ116*60	White
3	Siphon	PP+PVC+Silicon+TPE	1	405.7	φ40*480*389	White
3-1	Sealing ring	PP+TPE	6	9.6	φ45*2.5	Black
3-2	Screw	PP	7	62.3	φ55*17	White
3-3	L shape pipe	PP	2	84.4	φ40*191	White
3-4	T shape pipe	PP	1	32.5	φ40*95*65	White
3-5	Sealing ring	PVC	1	0.8	φ45*3	Black
3-6	Stopper	PP	1	0.8	φ17*9	White
3-7	Dishwasher connector	PP	1	7.7	φ29*66	White
3-8	Screw	PP	1	3.4	φ40*13.5	White
3-9	Sealing ring	Silicon	1	0.5	φ30*2	Black
3-10	Dishwasher connector	PP	1	51	φ29*66	White
3-11	straight pipe	PP	1	58.7	φ40*161.5	Black
3-12	Sealing ring	TPE	1	0.9	φ45*2.5	Black
3-13	Cover	PP	1	11.7	φ53*27	White
3-14	L shape pipe	PP	1	81.4	φ40*140	White
4	Mounting Hardware	Min steel+fiber PA66 +A3 iron	1	123.6	45*24*18	Black+silver
4-1	Hardware1 28-38mm	Min steel+fiber PA66 +A3 iron	12	123.6	45*24*18	Black+silver
5	Tap hole stoppers	SUS304+PP+EVA	1	17	φ45*20	Polished
5-1	Tap hole stopper	SUS304	1	12.4	φ44*18	Polished
5-2	Sealing ring	EVA	1	0.01	φ42*1.5	White
5-3	Fixing	PP	1	4.4	φ45*11.6	White

Matrix code	Ref	Designation	Material grade	Quantity	Weight(kg)	Dimension(mm)	Supplier Reference	Finishings Colour
2025R17P08-0029	1	Sink	SUS304	1	6.46	1160*500*170	2207S	Honeycomb

GB/T 1804 -C							
>0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
±0.05	±0.3	±0.5	±0.8	±1.2	±2	±3	±4

Product/Serie designation (as per Synnertrade/Specs)				Material grade steel SUS304			
GENERAL DRAWING							Thickness of sheet 0.7mm
2025R17P08-0029							
EAN (update when referencing is done)							
Format A3							
Scale 1:8							
Zhuohai Dali Kitchen & Bathroom Technology CO., Ltd.	V6	11/07/2024	Drawing creation			ShuyunSong	YYY
Supplier Reference	2207S	Date	Update description			Done by	Checked by

