

ACCESSORIES


THERMAL SOLAR ENERGY



Accessories

TERMOSTATIC MIXING VALVES HIGHT FLOW RATE FOR PLANTS WITH SOLAR PANELS

VÁLVULA MEZCLADORA TERMOSTÁTICA DE ALTO CAUDAL CON ANTIRRETORNOS

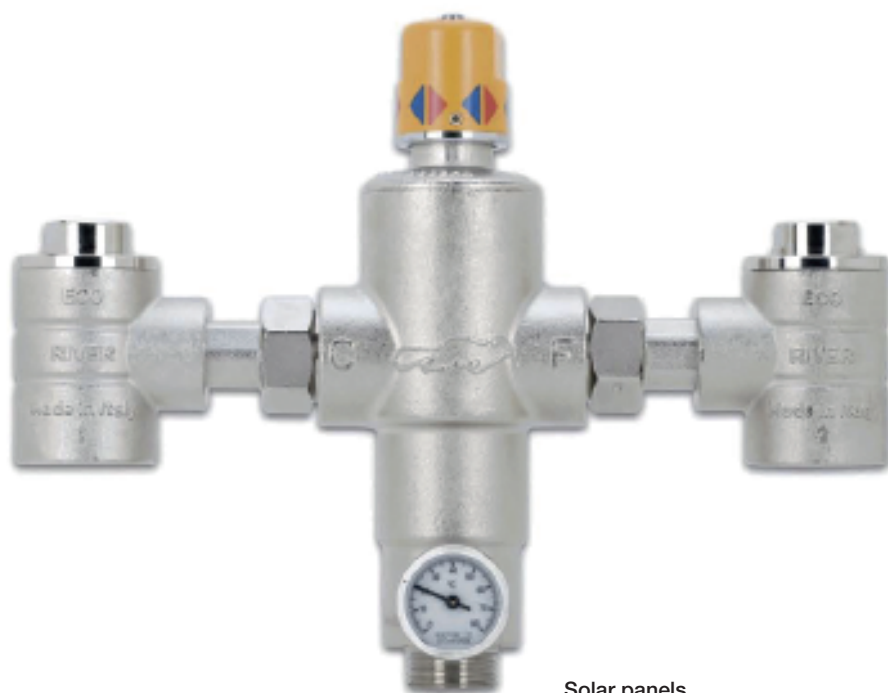



Solar panels
Paneles solares

- Preset at the factory at about 45° with possibility of changing the temperature of calibration.
- Complete with valves inspectables with function of non-return valves, shutoff valve and stainless steel filter.

- Precalibrada en fábrica a 45°C con posibilidad de modificarla.

- Las válvulas mezcladoras Termicol incluyen los racores de conexión con válvulas de retención, filtros de acero inoxidable y termómetro de control.

- Solar panel installation with forced circulation.
- Esquema de instalación con paneles solares en circulación forzada

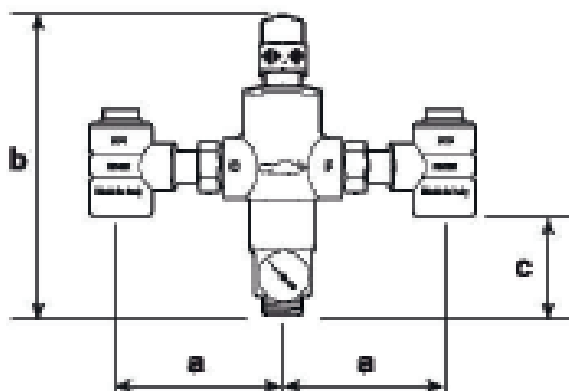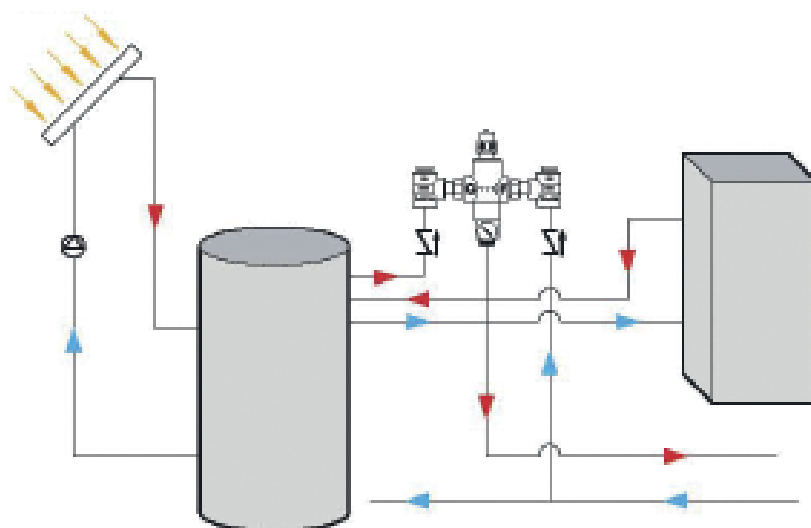

DIMENSIONS/ DIMENSIONES	Ø	mm a	mm b	mm c
VALVTERM-03	1"1/4	135	250	78
VALVTERM-04	1"1/2	195	270	85
VALVTERM-05	2"	195	270	85

ACCESSORIES

THERMAL SOLAR ENERGY



Accesories

TERMOSTATIC MIXING VALVES HIGHT FLOW RATE FOR SOLAR PANELS

VÁLVULA MEZCLADORA DE ALTO CAUDAL SIN ANTIRRETORNOS




- Preset at the factory at about 45°C with the possibility to modw the calibration reading the hmersion thermometer.
- Anti-scalding device with stop water supply.
- Precalibrada en fábrica a 45°C con posibilidad de modificarla leyendo el termómetro de inmersión.
- Dispositivo antiquemaduras con cierre del suministro de agua, siguiendo la norma EN 111

Flow rate in Vmin | Caudal l/min

BAR	Ø			
	1"	1"1/4	1"1/2	2"
1	53	82	155	212
2	75	118	225	300
3	92	145	270	370
4	108	167	320	430

- Hot maximum temperature: 85°
- Control range: 20÷65°
- Maximun pressure: 10bar
- Temperatura máxima de entrada: 85°
- Regulación: 20÷65°
- Presión máxima: 10bar

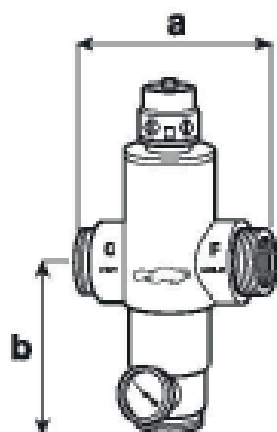

DIMENSIONS/ DIMENSIONES	Ø	mm a	mm b
VALTERM-06	1"1/4	123	118
VALTERM-07	1"1/2	182	138
VALTERM-08	2"	182	138