



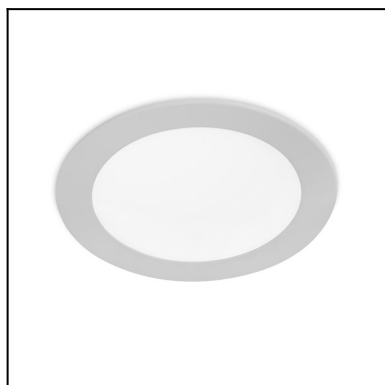

El acabado de la fotografía puede no coincidir con el de la referencia. Para identificar el real ver descripción del acabado.

Descargar formato .ldt / .ies

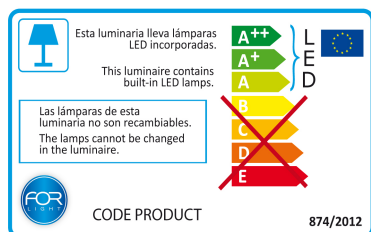

Haga clic en la imagen para descargar la etiqueta energética

CARACTERÍSTICAS TÉCNICAS

Tipo:	EMPOTRABLE DE TECHO
Índice protección IP:	IP23
Fuente de luz 1:	30 x LED 4,6W Blanco cálido - 3000K 580 lm ^(N)
Consumo total (W):	5,6W
Voltaje / Frecuencia:	100-240V/50-60Hz
Unidades por caja:	40
EAN:	8435381452841



MATERIALES / ACABADOS

Material estructura: Aluminio

Material difusor: Acrílico

Acabado estructura: Gris

Acabado difusor: Opal

EQUIPO

Equipo multivoltaje electrónico incluido (100-240V / 50-60Hz)

Lm^(N): Flujo nominal de la luminaria en condiciones reales de trabajo. Su flujo real dependerá de las condiciones ambientales y de la eficacia de la óptica y/o difusor.

FOR LIGHT se reserva el derecho de realizar las modificaciones técnicas oportunas con el fin de mejorar las prestaciones del producto.

Recomendamos consultar con el equipo comercial para aclarar cualquier duda.

Luminaire

Code TC-0146-BLA
Name Downlight FORLIGHT leds 4.6W


Measurem.

Code TC-0146-BLA
Name Downlight FORLIGHT leds 4.6W

Luminaire Flux	414.25 lm	Luminaire Power	6.00 W	Efficacy	69.04 lm/W	Efficiency	100.00%
Lamps Flux	414.25 lm	Maximum value	345.81 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	120 mm	Height	3 mm		
Round Luminous Area		Diam.	76 mm	Height	0 mm		
Horizontal Luminous Area		0.004536 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001097 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		22-06-2016		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		414.25 lm	
Operator		Asselum T3		Source Voltage [V]			
Temperature		25.00 °C		Source current [A]			
Humidity		60.00 %		Photocell			
Notes							

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		TC-0146-BLA		Name		414.25	6.00	1
				TC-0146-BLA				
C.I.E.	47 78 95 100 100			D DIN 5040	A30			
F UTE	1.00 E			B NBN	BZ 5			


Diam=120mm




C Halfplanes

180.0 — 0.0
270.0 — 90.0



ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

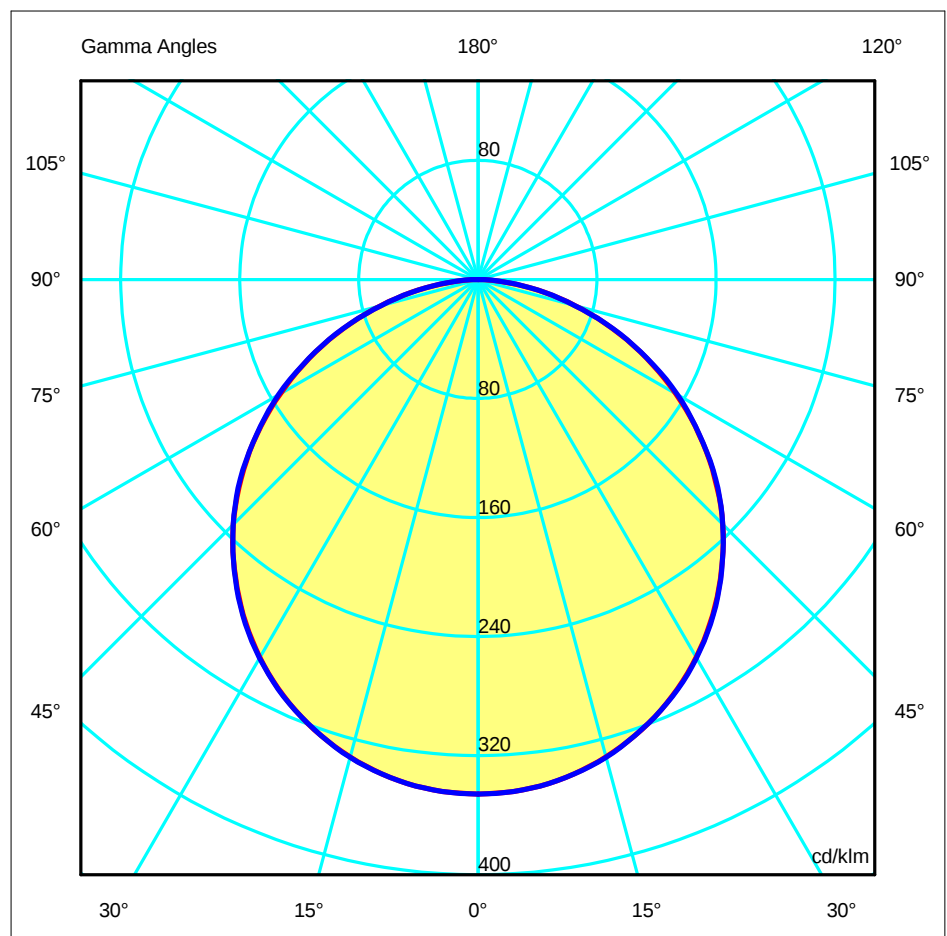

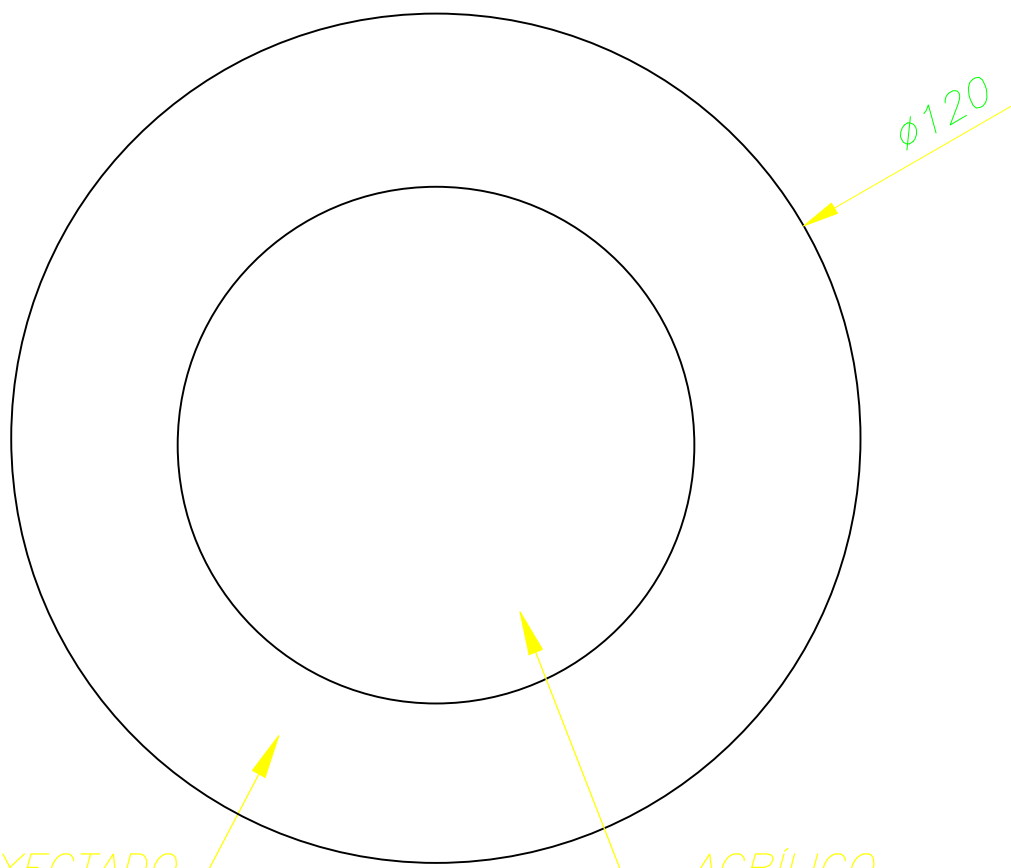


ALUMINIO INYECTADO
INJECTED ALUMINIUM

ACRÍLICO
OPAL

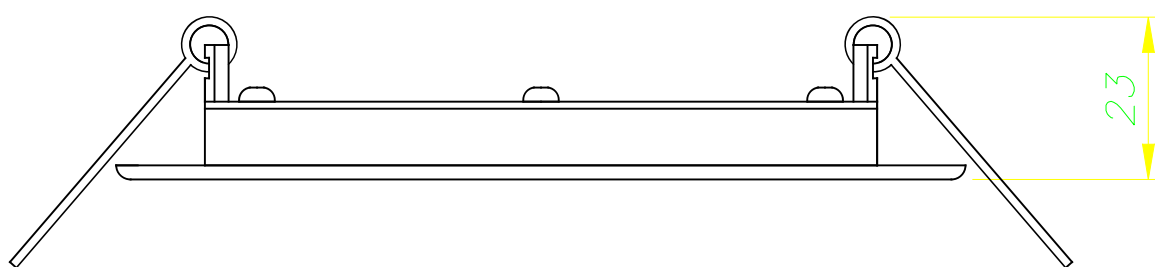

$\phi 106$



0-12mm

Scale 1:1

