

LUZ DE TRABAJO RECARGABLE


Características de Producto

- LED de alto rendimiento
- Todas las luces de trabajo pueden ser montadas opcionalmente con trípode.
- Se suministra con un transformador y cargador de 12V para el coche.
- Carcasa duradera y resistente a los impactos IK07.
- Rotación 300°.
- 2 modos de iluminación: 100% y 50%.
- Batería de 2 horas de duración a máxima potencia.



CAT NO.	LUMINARIA (LÚMENES)	POTENCIA (W)	EFICIENCIA (Lm/W)	PESO (kg)	CRI	RATIO IK	RANGO TEMP. (°C)	L/B VIDA ÚTIL
LWR18BG	1800	20	90	0,86	>80	IK07	-10 +40	L70/B50
LWR25BG	2500	30	83	1,33	>80	IK07	-10 +40	L70/B50

Dimensiones

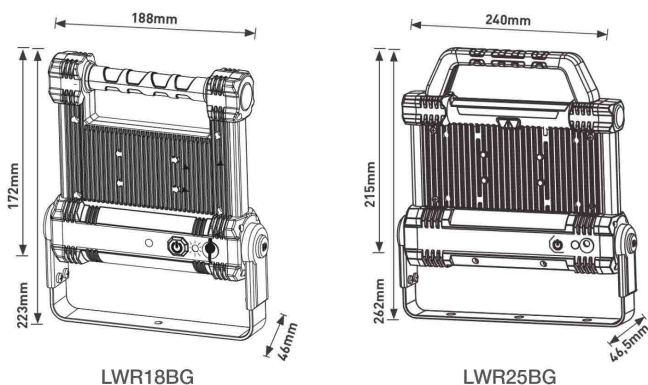

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

