


SOLAR GUARDIAN PROYECTOR

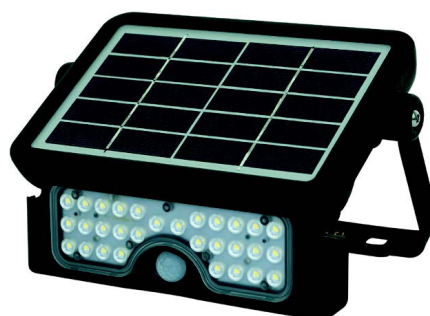


Características de Producto

- Funcional, simple, sin necesidad de conexión al suministro eléctrico.
- Cuerpo de policarbonato de alta resistencia.
- Perfecto para exterior de residencias sin necesidad de suministro de energía.
- PIR / Fotocélula configurable en modo seguridad y detección de presencia.


IP65	IK06	4000K BLANCO NEUTRO	ACABADO NEGRO	2 AÑOS Garantía	25K Horas
-------------	-------------	----------------------------------	-------------------------	------------------------------	---------------------

CAT NO.	TAMAÑO	LUMINARIA (LUMENES)	POTENCIA (W)	EFICIENCIA (Lm/W)
LEXSF6B40	Pequeño	550	5	110
LEXSF11B40	Grande	1080	10	108

LEXSF6B40

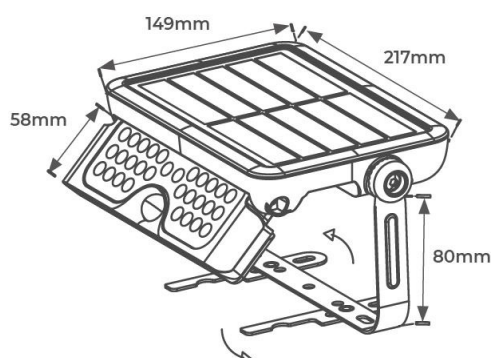

LEXSF11B40

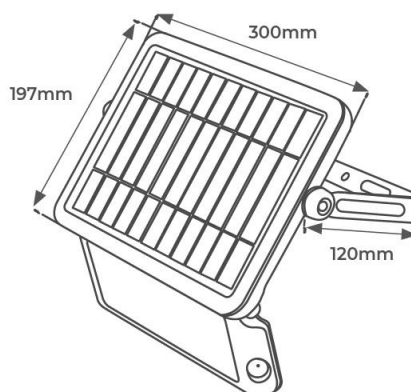

CAT NO.	PESO (kg)	CRI	RATIO IK	TIPO BATERÍA	CAPACIDAD BATERÍA	RANGO TEMP. (°C)	TEMP.AMBIENTE V.UTIL (°C)
LEXSF6B40	0.625	>80	IK06	Li-Ion 3.7V	3000mAh	-20 +25	25
LEXSF11B40	1.37	>80	IK06	Li-Ion 3.7V	7200mAh	-20 +25	25

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires - Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

LUCECO



Esta luminaria lleva lámparas LED incorporadas.

A++

A+

A

B

C

D

E

LED

Las lámparas de esta luminaria no son recambiables.

874/2012



