

LUZ DE TRABAJO FLEXIBLE

Características de Producto


- Proyector plegable, almacenamiento compacto, rotación 300° y focos 180°.
- Puede ser montada opcionalmente con trípode.
- Carcasa duradera y resistente.
- Cuerpo de aluminio fundido a presión.
- 3 fuentes LED de alto rendimiento.
- Se suministra con cable.



CAT NO.	LUMINARIA (LÚMENES)	POTENCIA (W)	EFICIENCIA (Lm/W)	PESO (kg)	CRI	RANGO TEMP. (°C)	L/B VIDA ÚTIL	TENSIÓN DE ALIMENTACIÓN	FRECUENCIA DE ALIMENTACIÓN (Hz)
LW50BG2	5000	50	100	1,79	>80	-10 +40	L70/B50	110 - 277V	50 - 60

Dimensiones

- Longitud: 24cm - extendido: 43.7cm
- Ancho: 4.6cm - ultra fino
- Altura: 21.3cm

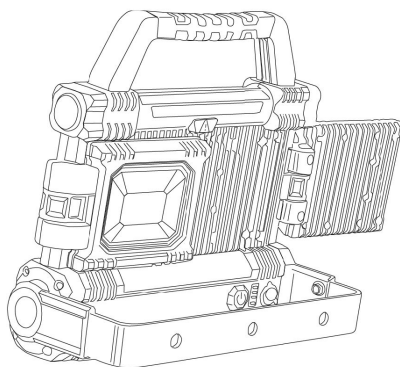

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

