


LG 32

Producido en: España

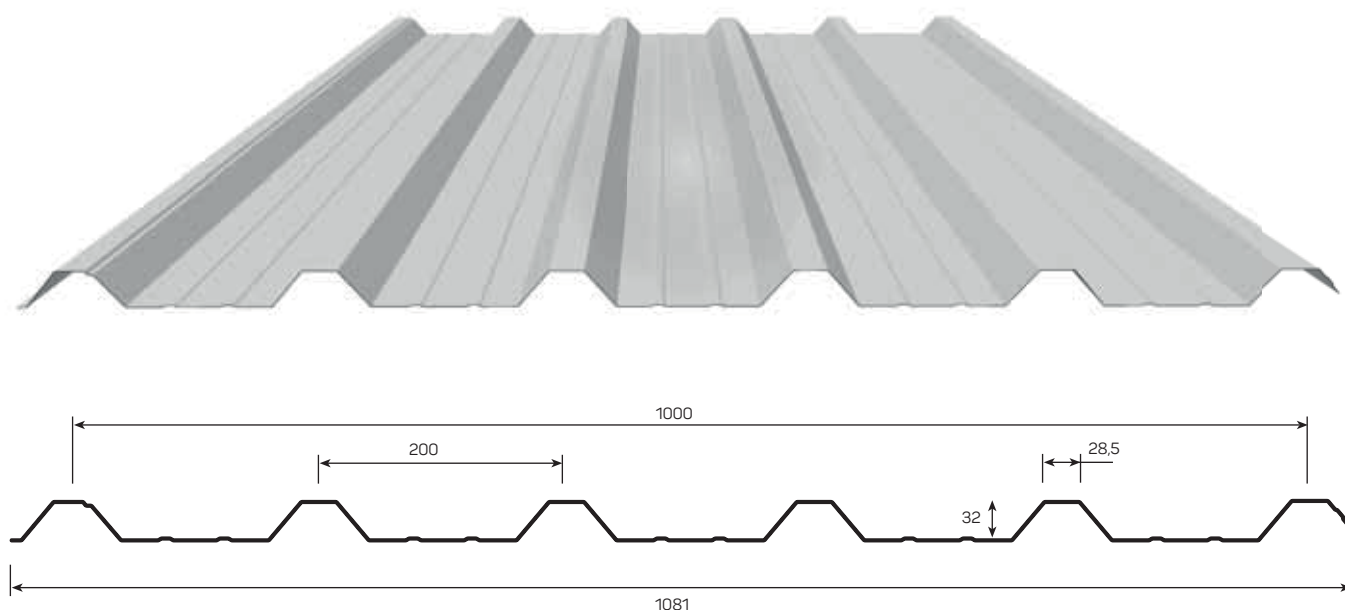

CARACTERÍSTICAS DE LA SECCIÓN

	ESPESOR mm				
	0,5	0,6	0,7	0,8	1,0
Peso (kg/m ²)	4,70	5,66	6,60	7,55	9,45

TOLERANCIAS DIMENSIONALES

Largo	+10 mm hasta 3000 mm +20 mm más de 3000 mm -5 mm para todas las dimensiones
Ancho útil	± 5 mm
Fuera de escuadra	S ≤ 0,5% del Ancho útil

CARGA MÁXIMA DISTRIBUIDA UNIFORMEMENTE kg/m² LG 32

ESPESOR mm		DISTANCIA ENTRE EJES m								
		1,00	1,25	1,50	1,75	2,00	2,25	2,50	2,75	3,00
	0,5	300	200	140	120	80	60			
	0,6	380	240	180	140	105	60			
	0,7	440	280	200	150	115	80			
	0,8	520	320	220	160	120	90	60		
	1,0	600	420	260	200	140	100	80	60	
	0,5	400	260	200	140	120	80	60		
	0,6	500	320	220	180	135	100	90	60	
	0,7	580	380	260	200	150	120	95	65	
	0,8	660	440	300	220	160	130	100	80	60
	1,0	800	540	400	260	200	140	120	95	80