


TECHNICAL SPECIFICATION



ORF

O - optisol, **R** - roller, **F** - full (complete blackout)

I. APPLICATION

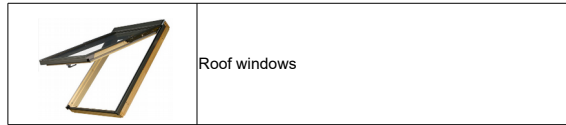

Roof windows

II. FEATURES

Gradual reduction of incoming light up to blackout
Wide range of colours
Partial protection against the heat of the sun
Protection against UV radiation
Complete privacy by covering the whole window
Side aluminium guides
Side strings located behind guides enable to stop the blind in any position
The lower aluminium bar is equipped with a seal for improved contact with the bottom section of the sash and reduction of light penetration into the room.

IV. OPTIONS

Blackout fabric – monochromatic

V. COMPATIBILITY WITH WINDOWS

Window types marking	FTS, FTS-V FTP-V, FTU-V	FTT U5 ¹ FPT U5 ¹	FTT U6 FTT U8	FPP-V ^{preSelect} , FPU-V ^{autoSelect} FHP-V, FHU-V	FKP FKU	FEP FEU	FNP	FTP/D FTU/D	FLP	BVP, BXP BDR, BDL
ORF	+	-	+	+	+	+	+	+	-	-

Window types marking	top sash	bottom sash	FXP FXU	FYP-V	top sash	bottom sash	FCS	FAP	FBP	PTP, PTP-V	PPP-V ^{preSelect}	PYP-V
	FDY-V				FGH-V							
ORF	-	-	-	+	-	-	-	-	-	+	+	-

Window types marking	DXC DMC DEC	DXF DMF DEF	FSP ^{Smoke Ventilation}	FWR FWL	WSS WSZ WSH	WGT WGI	WLI	Optilight (A, B, C, VA, VB)	Optilight VK	FTK-V
ORF	-	-	-	-	-	-	-	+	+	+

¹ - internal accessories are made to order, marking remains unchanged

² - installation recommended to be performed by FAKRO service

VI. TECHNICAL SPECIFICATION OF FABRIC

Colours of fabrics of ORF roller Blinds	Price group	Art.No.
ORF/284	I price group	243
ORF/285	I price group	244