


P.I. Polysol c/Polysol Cuatro 7 CIF: B41286212
Alcalá de Guadaira CP: 41500
Tfn: 954 10 04 61 Fax: 954 10 04 62 roycle@roycle.com

FICHA TÉCNICA DE PRODUCTO

PANEL AISLANTE DE POLIESTIRENO EXPANDIDO D10

Roycle S.L. B41286212 P.I. Polysol c/Polysol Cuatro 7 Alcalá de Guadaira CP: 41500 Tfn: 954 10 04 61 Fax: 954 10 04 62 roycle@roycle.com		 
--	--	--

Dimensiones			
Largo	Ancho	Espesor	uds/pq
2000	1000 1200	10	60
		20	30
		30	20
		40	15
		50	12
		60	10
		70	8
		80	7
		90	7
		100	6

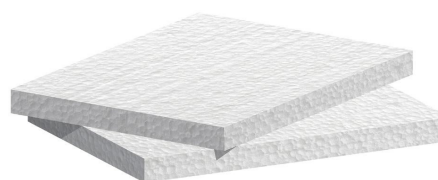

Placa de Poliestireno Expandido (EPS)
para aplicación como aislante Térmico

Características Técnicas

Conductividad Termica (λ)	Espesor (mm)	Valor	Unidad
	10	0,046	W/mk
	20	0,046	
	30	0,046	
	40	0,046	
	50	0,046	
	60	0,046	
	70	0,046	
	80	0,046	
	90	0,046	
	100	0,046	

Resistencia Termica	Espesor (mm)	Valor	Unidad
	10	0,22	m ² K/W
	20	0,43	
	30	0,65	
	40	0,87	
	50	1,09	
	60	1,30	
	70	1,52	
	80	1,74	
	90	1,96	
	100	2,17	

Código de tolerancias dimensionales	T1-L1-W1-S1-P3	EPS-EN13163
Estabilidad dimensional	DS(N)5, DS(70,90)	EPS-EN13163

Reaccion al Fuego	E	Euroclases
-------------------	---	------------