

Lumina

Lumina Blade LED 2700K

3039985



Range Features

-



PRODUCT OVERVIEW

Certifications	CE
Colour temperature (K)	2700
Colour	White
CRI (Ra)	85
Dimmable	Non-dim / not dimmable (switched only)
EAN code	8711971399858
Luminous flux (lm)	353
Housing	Aluminium
IK rating	IK02
IP rating	IP20
Light colour	Amber white
LOR (%)	100
Mount	Wall surface
Ordering number	3039985
Efficacy (Rated) (lm/w)	70.6
Average life (h) - L70/B50	30000
Technology	LED
Voltage (V)	100-240

DATA TABLE

General data

Certifications	CE
Control gear type	Electronic
Dimmable	Non-dim / not dimmable (switched only)
EAN code	8711971399858
Environment	Integral
General application	Hospitality; Residential & Consumer
Housing	Aluminium

Lumina

Lumina Blade LED 2700K

3039985

Mount	Wall surface
Ordering number	3039985
Product name	Lumina Blade LED 2700K
Average life (h) - L70/B50	30000
Technology	LED
E-number FI	4271117
What temperature Life is measured at (°C):	25

Optical data

Colour temperature (K)	2700
CRI (Ra)	85
Distribution type	Indirect
Luminous flux (lm)	353
Light colour	Amber white
LOR (%)	100

Physical data

Colour	White
Height (mm)	48
IK rating	IK02
IP rating	IP20
Length (mm)	118
Width (mm)	200

Electrical data


Drive current (mA)	500
Electrical protection	Class II
Efficacy (Rated) (lm/w)	70.6
Total power consumption (W)	5
Voltage (V)	100-240

PHOTOMETRY

Lumina

Lumina Blade LED 2700K


3039985

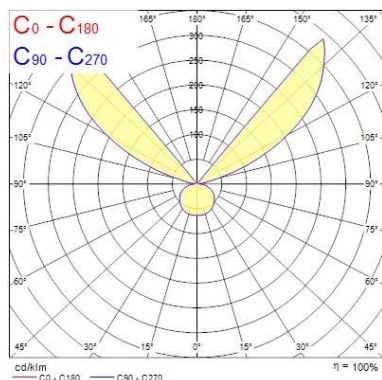

0.5	2.37	E(0°) E(C0)	67.1°	89 2
1.0	4.73	E(0°) E(C0)	67.1°	17 1
1.5	7.10	E(0°) E(C0)	67.1°	8 0
2.0	9.47	E(0°) E(C0)	67.1°	4 0
2.5	11.84	E(0°) E(C0)	67.1°	3 0
3.0	14.20	E(0°) E(C0)	67.1°	2 0

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 134.2°)

TECHNICAL DRAWINGS



3039985

This luminaire is compatible with bulbs of the energy classes:

A++

A+

A

B

C

D

E

LED

This luminaire is sold with a bulb of the energy class:

A++

874/2012

Lumina

Lumina Blade LED 2700K

3039985

