



3 PANELES 360° LUZ DE TRABAJO RECARGABLE IP54

Características de Producto

- 3 fuentes de luz independientes
- 2 paneles laterales rotables y plegables
- 3 modos de iluminación: panel central 1200lm, solo los laterales 2000lm y los tres paneles a la vez 4000 lm
- Cable de carga USB tipo C, incluido
- Clasificación IP54 para uso exterior e interior
- Tiempo de trabajo: 1 hora con salida máxima
- Batería: 7.4 V/ 4400mAh 18650



CAT NO.	LUMINARIA (LÚMENES)	POTENCIA (W)	TIEMPO DE CARGA	TIEMPO DE TRABAJO
LILA400S65	4000	20W	8h	1h. al máx

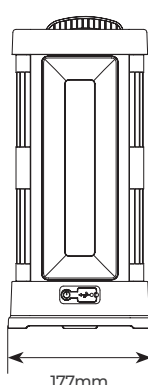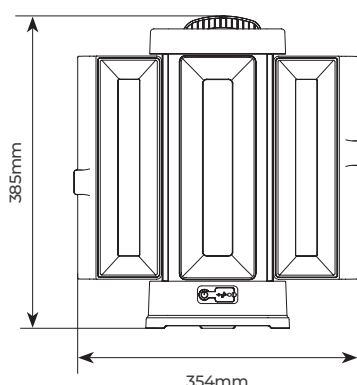

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment