

MaxCK

SELF-PRIMING PUMP FOR IN-GROUND AND ABOVE GROUND POOLS UP TO 90 M³

- Quiet operation and reduced footprint, optimal for small technical rooms
- Available in three powers, for pools up to 90 m³
- 1,5" connection ports
- Suitable for salt water up to 35 g/l
- Double drainage cap, no tools required, for easy wintering
- 230 V 50 Hz single phase power supply





High-performance




Easy access to the pre-filter, opening tool included



Drainage caps to make wintering easier

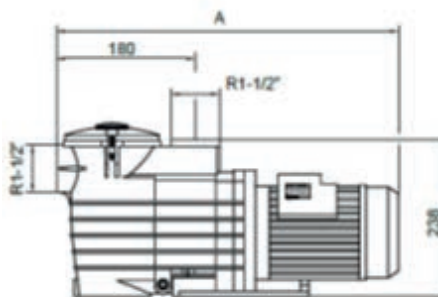

Pressure (mbar)

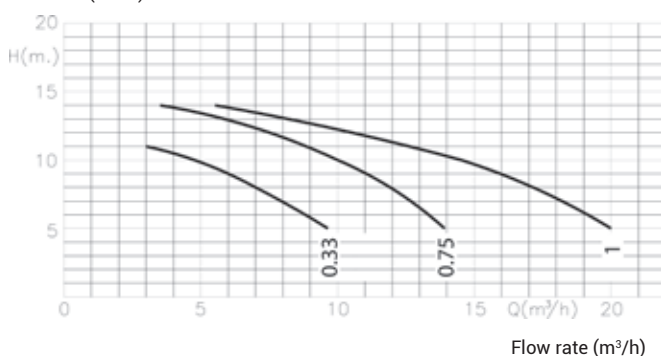

Technical Specifications

Max. water temp. / Max. pressure	50°C / 2.5 bar
Connection threaded	1 1/2"
Mechanical seal	AISI 316, suitable for salt water
Motor-Drive specifications	Class F, IP55, 50Hz, 2.850 rpm
Housing/impeller/strainer/lid	PP + F.G/Noryl®/PP/SAN

MAX CK

Code	Ref.	P2 (HP)	P1 (kW)	A (mm)	Flow Rate m³/h*	Weight (kg)	Pack (mm)	Qty/pallet	MOQ**	EAN
SPK2203XE71	MAXCK 33M	0.33	0.45	475	7	8	310 x 250 x 510	30	1	8435205555550
SPK2207XE111	MAXCK 75M	0.75	0.75	475	11.9	9	312 x 250 x 510	30	1	3660149611092
SPK2210XE171	MAXCK 100M	1	1	505	17.2	11.5	313 x 250 x 510	30	1	8435205555567

* under 8 m water column pressure
** Minimum order quantity