


## HIGHBAY CCT Y POTENCIA AJUSTABLE

### Características de Producto

- Luminaria con distribución luminosa amplia – 120°.
- Posibilidad de cambiar la temperatura de color entre: 4000K-5000K-6000K.
- Posibilidad de cambiar la potencia de la campana entre: 120W-150W-200W.
- Alto flujo lumínico 160 Llm/W.
- Suministrado con gancho y 28 cm de cable.
- Campana regulable de 0-10V.



### Dimensiones

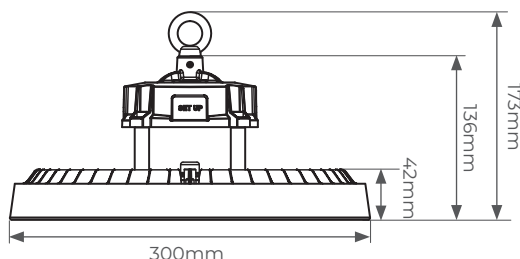

| CAT NO.      | LUMINARIA (LÚMENES) | POTENCIA (W) | EFICIENCIA (Llm/W) |
|--------------|---------------------|--------------|--------------------|
| LHBE3PWCC-01 | 19200               | 120          | 140                |
|              | 24000               | 150          | 160                |
|              | 32000               | 200          | 140                |



| STANDARD          | DESCRIPTION                                                                                                                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EN 60598-1        | Luminaires – General requirements                                                                                                                                                                          |
| EN 60598-2-1      | Luminaires – Fixed general purpose                                                                                                                                                                         |
| EN 61347-1        | Lamp controlgear – Part 1: General and safety requirements                                                                                                                                                 |
| EN 61347-2-13     | Lamp controlgear – Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules                                                                                     |
| EN 61000-3-2      | Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions                                                                                                                    |
| EN 61000-3-3      | Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection |
| EN 55015          | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment                                                                                        |
| EN 61547          | Equipment for general lighting purposes – EMC immunity requirements                                                                                                                                        |
| EN 62471          | Photobiological safety of lamps and lamp systems                                                                                                                                                           |
| 2002/96/EC        | Waste Electrical & Electronic Equipment (WEEE)                                                                                                                                                             |
| 2011/65/EU        | Restriction of the use of certain Hazardous Substances in EEE (RoHS)                                                                                                                                       |
| (EC) No 1907/2006 | The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)                                                                                                                           |