

ECO CLIMATE SPEEDFIT

Características de Producto

- Diseñado para instalación de superficie en entornos industriales, comerciales y cualquier otro con necesidades de luminaria lineal estanca.
- Difusor Opal para mayor uniformidad y confort visual.
- Fabricación de policarbonato ABS, conector estanco M20 en ambos extremos.
- Luminaria con posibilidad de Conexión Continua.




PANTALLA SIMPLE

CAT NO.	TEMP. COLOR (K)	DRIVER	LUMINARIA (LÚMENES)	POTENCIA	EFICIENCIA (LLM/W)
ECLS6G9S40	4000	Estándar	990	9W	110
ECLS12G19S40	4000	Estándar	1980	18W	110
ECLS15G26S40	4000	Estándar	2640	24W	110
ECLS6G9S50	5000	Estándar	990	9W	110
ECLS12G19S50	5000	Estándar	1980	18W	110
ECLS15G26S50	5000	Estándar	2640	24W	110

PANTALLA DOBLE

CAT NO.	TEMP. COLOR (K)	DRIVER	LUMINARIA (LÚMENES)	POTENCIA	EFICIENCIA (LLM/W)
ECLS6G19S40	4000	Estándar	1980	18W	110
ECLS12G39S40	4000	Estándar	3960	36W	110
ECLS15G52S40	4000	Estándar	5280	48W	110
ECLS6G19S50	5000	Estándar	1980	18W	110
ECLS12G39S50	5000	Estándar	3960	36W	110
ECLS15G52S50	5000	Estándar	5280	48W	110

Dimensiones Pantalla Simple y doble

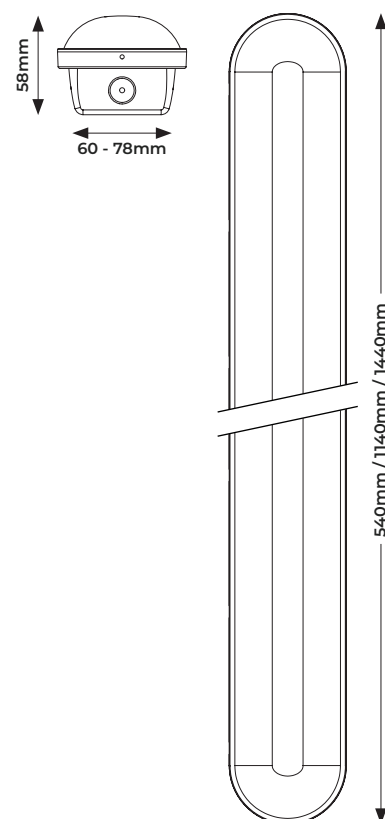

CAT NO.	PESO (kg)	CRI	FECUENCIA (HZ)	RATIO IK	RANGO TEMP. (°C)	VIDA ÚTIL FACTOR L/B	MAX. CC
ECLS6G9S40	0.41	>80	50-60	IK06	-20 +45	L70 / B50	27
ECLS12G19S40	0.61	>80	50-60	IK06	-20 +45	L70 / B50	13
ECLS15G26S40	0.81	>80	50-60	IK06	-20 +45	L70 / B50	13
ECLS6G9S50	0.41	>80	50-60	IK06	-20 +45	L70 / B50	27
ECLS12G19S50	0.61	>80	50-60	IK06	-20 +45	L70 / B50	13
ECLS15G26S50	0.81	>80	50-60	IK06	-20 +45	L70 / B50	13
ECLS6G19S40	0.45	>80	50-60	IK06	-20 +45	L70 / B50	12
ECLS12G39S40	0.74	>80	50-60	IK06	-20 +45	L70 / B50	10
ECLS15G52S40	0.91	>80	50-60	IK06	-20 +45	L70 / B50	9
ECLS6G19S50	0.45	>80	50-60	IK06	-20 +45	L70 / B50	12
ECLS12G39S50	0.74	>80	50-60	IK06	-20 +45	L70 / B50	10
ECLS15G52S50	0.91	>80	50-60	IK06	-20 +45	L70 / B50	9

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

