



LUZ DE TRABAJO CON ALMACENAJE DE CABLE Y ENCHUFE

Características de Producto

- Grado de protección IP54
- Chips LED de alta eficiencia y larga vida
- Vidrio esmerilado templado
- Suministrado con 1.55m (30W) y 1.8m (50W) de cable H05RN-F
- Cómodo almacenaje de cable alrededor de la luz de trabajo
- Incluye boton trasero, preparado para la intempérie, para poder apagar o encender la luz
- Luz de trabajo basculante
- Adecuado para decoración, proyectos de exterior e iluminación de trabajo



LW30G40SC

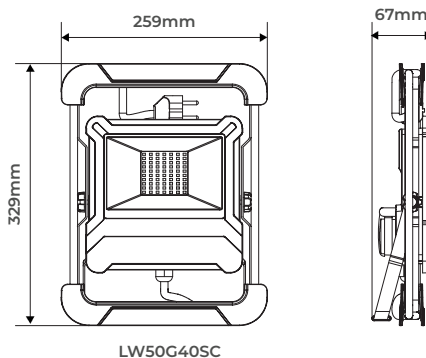

LW50G40SC

CAT NO.	LUMINARIA (LÚMENES)	POTENCIA (W)	EFICIENCIA (Llm/W)	PESO (kg)	DIMENSIONES (mm)	CRI	RATIO IK	TENSIÓN DE ALIMENTACIÓN	RANGO TEMP. (C)
LW30G40SC	2400	30	80	0,86	277x205x67	>80	IK05	220 - 240V	-20 +25
LW50G40SC	4000	50	80	1,15	379x259x67	>80	IK05	220 - 240V	-20 +25

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

