
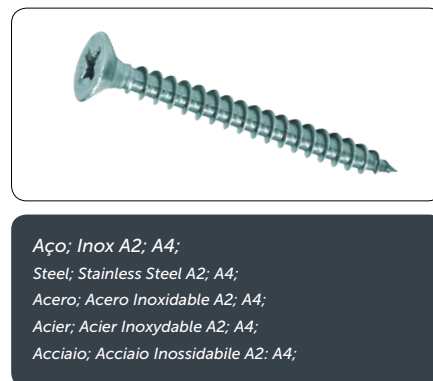


DIN 7505A | PCL 202

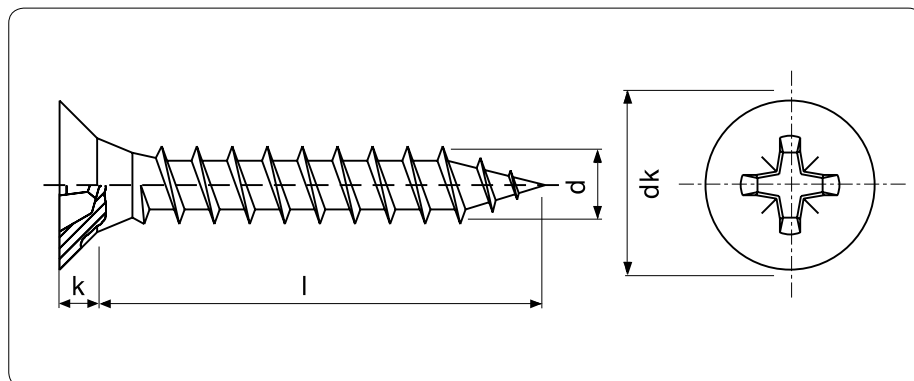

Parafuso para aglomerado cabeça embeber pozidrive

Chipboard screws double countersunk head pozidrive | Tornillo de cabeza avellanada para aglomerado con hueco cruciforme (Pozidrive) | Vis pour aggloméré à tête fraisée pozidrive | Viti truciolari TSP pozidrive

d	2.6	3	3.5	4	4.5	5	6
dk	5	6	7	8	9	10	12
k	1.4	1.75	2.00	2.30	2.60	2.90	3.50
n° bit	1	1	2	2	2	2	3
l (mm)	peso/ weight/ peso/ poids/ peso - 1000pc/Kg						
10	0.33		0.55				
12	0.44	0.44	0.66	0.88	1.21		
16	0.44	0.55	0.77	1.10	1.43	1.87	
18	0.44	0.66	0.88	1.21	1.65		
20	0.55	0.77	0.88	1.32	1.65	2.53	
15	0.66	0.88	1.21	1.54	1.98	2.53	
30		0.99	1.32	1.76	2.53	2.86	4.51
35		1.21	1.55	2.09	2.75	3.30	
40		1.43	1.76	2.53	3.19	3.63	5.61
45			2.31	2.64	3.52	4.18	6.05
50			2.31	2.97	3.63	4.29	6.82
60				3.41	3.70	5.28	7.81
70					4.10	6.38	9.24
80					6.38	6.93	9.80
90						7.70	11.55
100						8.21	
110							13.86
120							15.51
130							17.82
150							18.48

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'informations. | Ricopertura di superficie. A richiesta.