

RMT6 - REMATE RECORTADO BEIRADO (EAN 2007000302880)


PT Projetado para sistemas de telhado Ideal para coberturas industriais e bricolage	EN Designed for roof systems Ideal for industrial roofing and DIY	FR Conçu pour les systèmes de toiture Idéal pour les toitures industrielles et bricolage
---	---	--

RMT6 - REMATE TOPO RECORTADO CTELHA RMT6 S=40 mm CASTANHO 8004 - C/ 1000 mm (EAN 2007000302880)




RMT6 - PUNCHED EAVES FLASHING

RMT6 - CLOSOIR CRANTÉ

Características Técnicas, Technical characteristics, Caractéristiques techniques

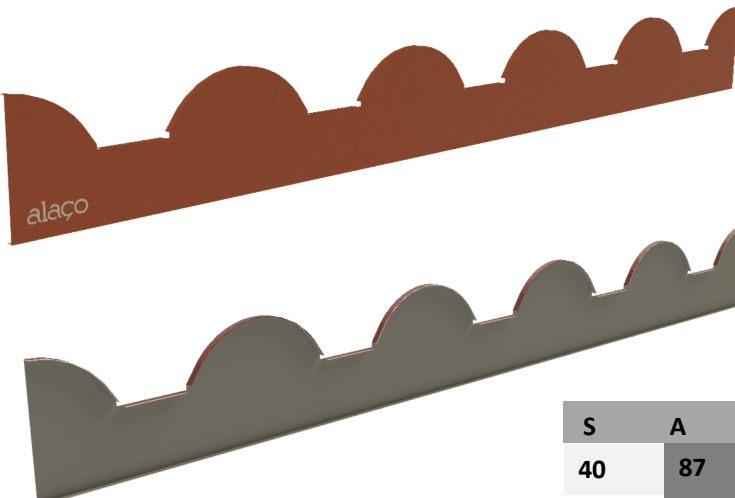Qualidade do Aço Steel Quality Qualité de A'cier	S220GD		corte: 
Revestimento Galvanizado Galvanized Coating Revêtement galvanisé	Z100	gr/m2	
Revestimento Pré-Lacado Pre-Lacquered Coating Revêtement pré-laqué	Poliester - Deep Mat Texturado	25µm / 7µm	
Espessura Thickness Épaisseur	0,5mm		
Cores Colors Couleurs	Catalogo, Catalog, Catalogue		
Comprimento Standard Standard Length Longueur standard	1008	mm mm (Max)	
Largura Modular Modular Width Largeur modulaire	107 mm		

S	A
40	87

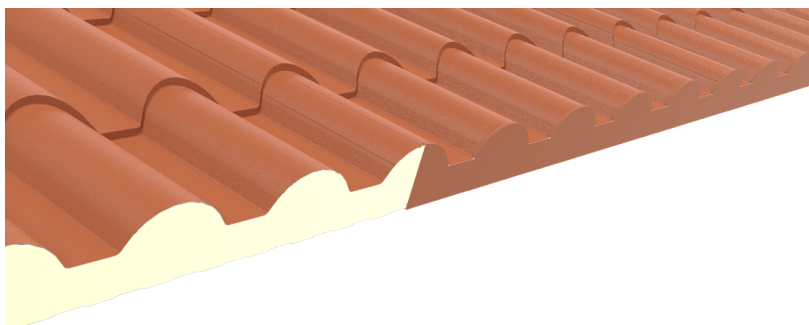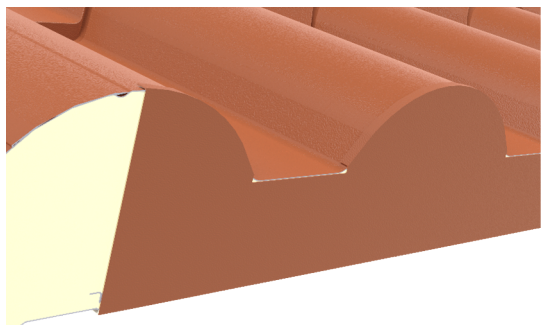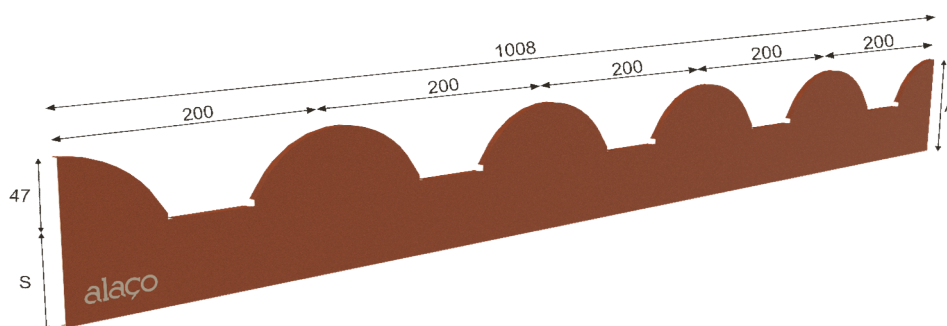

ALAÇO REVESTIMENTOS METÁLICOS S,A

Sede: Casal dos Crespos - Apartado 76, 2490-909 Ourém - Portugal
Fábrica: Estrada Nacional 356, Casal dos Crespos, 2490-333 Ourém - Portugal

www.alaco.pt
geral@alaco.pt