

RM6 - REMATE RECORTADO BEIRADO C5 (EAN 2007000302774)


PT Projetado para sistemas de telhado Ideal para coberturas industriais e bricolage	EN Designed for roof systems Ideal for industrial roofing and DIY	FR Conçu pour les systèmes de toiture Idéal pour les toitures industrielles et bricolage
---	---	--

RM6 - REMATE TOPO RECORTADO C5 RM6 S=30 mm BRANCO 9001 - C/ 1000 mm (EAN 2007000302774)




RM6 - PUNCHED EAVES FLASHING C5

RM6 - CLOSOIR CRANTÉ C5

Características Técnicas, Technical characteristics, Caractéristiques techniques

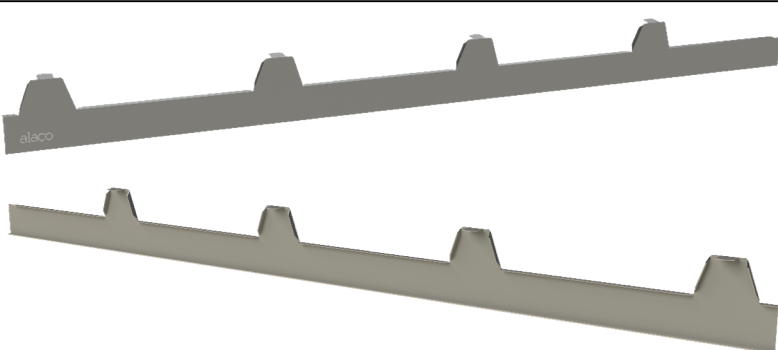Qualidade do Aço Steel Quality Qualité de A'cier	S280GD		
Revestimento Galvanizado ^(a) Galvanized Coating Revêtement galvanisé	Z225	gr/m2	
Revestimento Pré-Lacado ^(a) Pre-Lacquered Coating Revêtement pré-laqué	Poliester	25µm / 7µm	
Espessura Thickness Épaisseur	0,60 mm		
Cores Colors Couleurs	Catalogo, Catalog, Catalogue		
Comprimento Standard Standard Length Longueur standard	1000 1035	mm mm (Max)	
Largura Modular Modular Width Largeur modulaire	80mm		

S	A
30	70

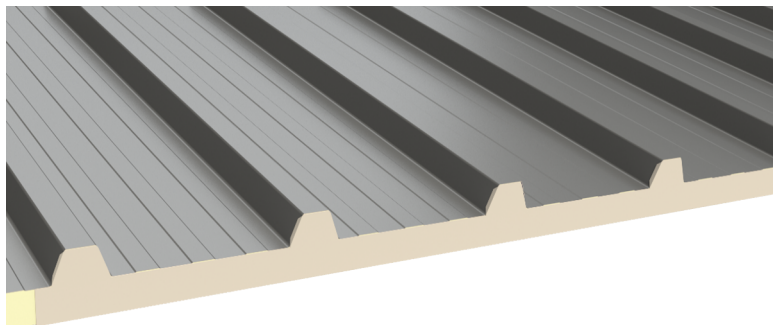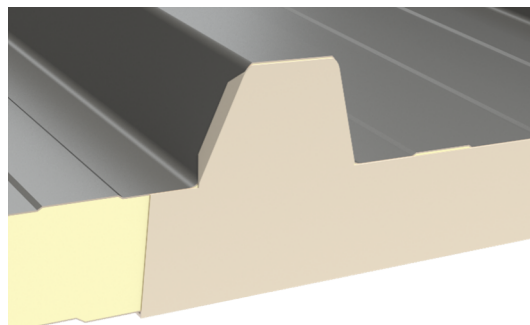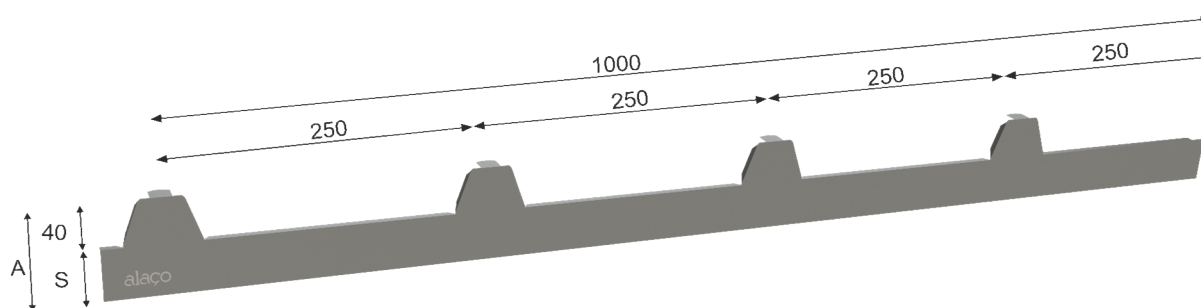

ALAÇO REVESTIMENTOS METÁLICOS S,A

Sede: Casal dos Crespos - Apartado 76, 2490-909 Ourém - Portugal
Fábrica: Estrada Nacional 356, Casal dos Crespos, 2490-333 Ourém - Portugal

www.alaco.pt
geral@alaco.pt