
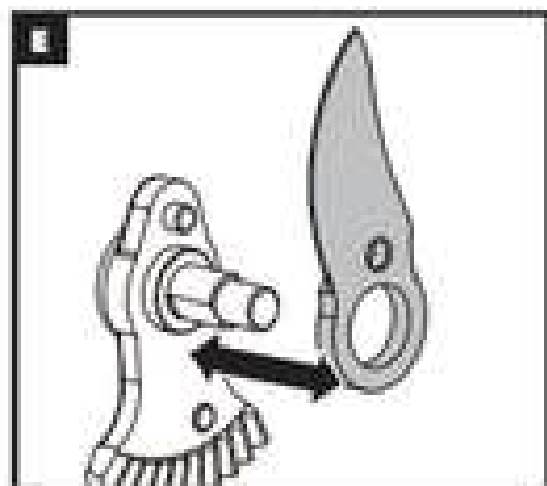
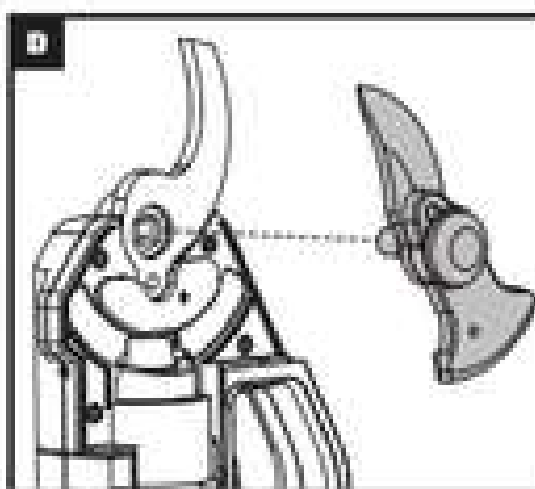
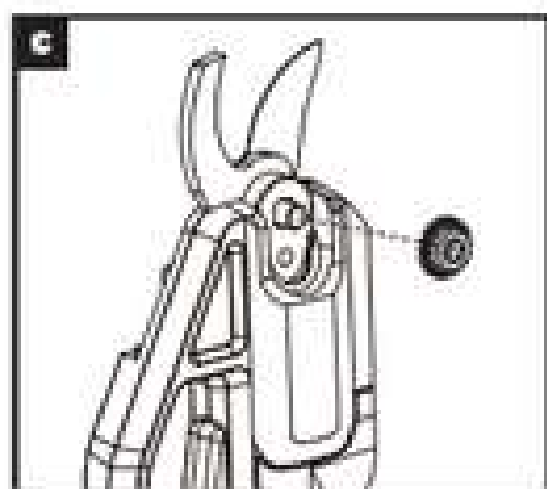
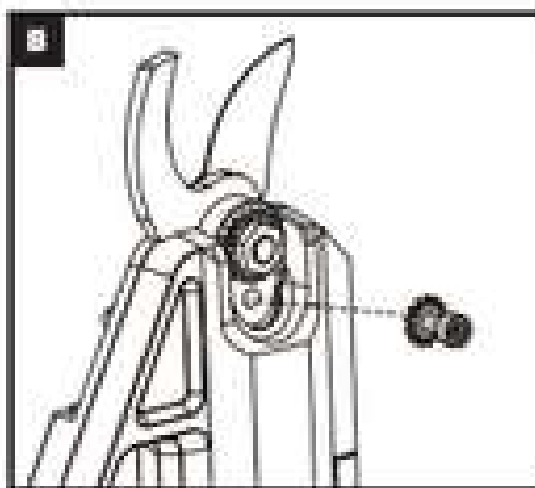


WA0257

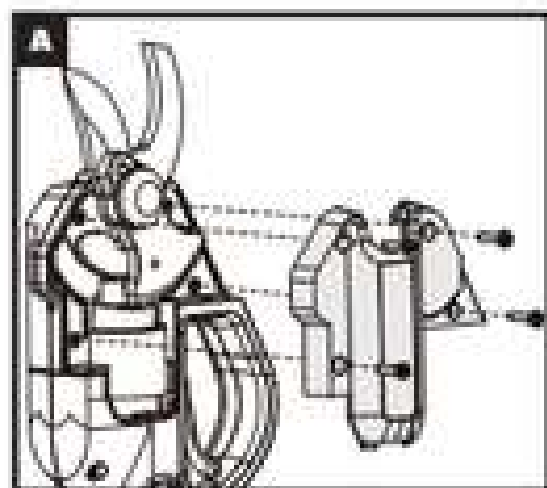

OPERATION

1. Remove the screw on the cover and take off the cover. (See Fig. A)
2. Use a 4mm hexagon wrench to remove the locking screw and locking washer. (See Fig. B)
3. Use a 13mm hex socket to remove the hex nut. (See Fig. C)
4. Remove, change and reassemble the blade. (See Fig. D, E)
5. Retighten the hex nut. (Torque: 0.3-0.5 Nm)
6. Install the locking washer and locking screw. (Torque: 2-3 Nm)
7. Install the cover and the screw on the cover.