

PROYECTOR ASIMÉTRICO

50W/80W/100W

con cambio de color y potencia

Características de Producto

- Cambio de temperatura con interruptor en la carcasa.
- Tres tonos de luz, cálido, neutro y frío.
- Tres potencias seleccionables, 50W, 80W y 100W, con interruptor en la carcasa.
- Cárcasa de aluminio fundido a presión resistente a la corrosión IP65 con difusor de vidrio.
- Precableado de 70cm 3x1,0mm².
- Chips LED de larga duración de 150lm/W y alta eficiencia.
- Adecuado para iluminación de seguridad exterior residencial o comercial.
- Perfecto para caminos de acceso, jardines, patios entradas y pasillos.




CAT NO.	LUMINARIA LÚMENES	EFICIENCIA Llm/W	VOLTAJE	ÁNGULO DE APERTURA	CCT (K)	POTENCIA
LFP100BCCT	15.000	150	120-240V	50x110°	3.000K 4.000K 5.000K	50W 80W 100W

Product Dimensions

CAT NO.	LARGO (mm)	ANCHO (mm)	ALTO (mm)
LFP100BCCT	274	53	346



Product Drawing

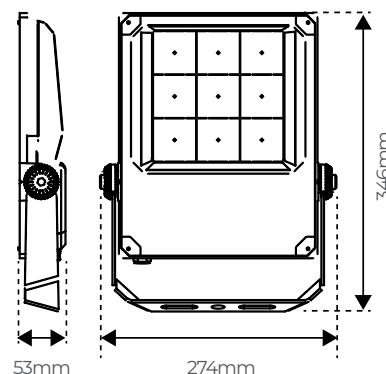

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-5	Luminaires – Floodlights
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)