




Light Source Technical DataSheet

| | |
|---|---|
| EAN | 3276007963557 |
| Product Supplier reference | W56-A-310MM |
| Type of product | Containing product |
| Supplier's address | ADEO Services - 135 rue Sadi Carnot - CS00001. 59790 RONCHIN |
| Supplier's name or trade mark | INSPIRE |
| Replaceability of Light source | non-remplacable |
| Replaceability of separate control gears | non-remplacable |
| Light sources maker model | W56-A-310MM-LS |
| Link to EU Product Data base | https://eprel.ec.europa.eu/screen/product/lightsources/2470352 |
| Spectral power distribution in the range 250 nm to 800 nm. at full-load |  <p>The graph shows the spectral power distribution (SPD) of the light source. The x-axis represents Wavelength (nm) from 380 to 780, and the y-axis represents Spectral Power (mW/nm) from 0.0 to 1.2. The SPD shows a sharp peak in the blue region (around 450 nm) and a broad spectrum in the green to red regions (from 500 nm to 700 nm). The total power is 1.0 = 1.322e+001 mW/nm.</p> |
| If the light source contains mercury: instructions on how to clean up the debris in | Not Applicable |
| Recommendations on how to dispose of the light source / Driver at the end of its life Directive 2012/19/EU | Electrical product must not be thrown out with domestic waste. They must be taken to a communal collecting point for environmentally friendly disposal in accordance with local regulations. Contact your local authorities or stockist for |
| Driver maker model | W56-A-4.5W |
| Maximum output power of the driver (for HL, LED and OLED) or the power of the light source for which the driver is intended (for FL and | 4 |
| Type of light source(s) for which it is | LED |
| Efficiency in full-load | 84.30% |
| No-load power (Pno) (W) | N/A |
| Standby power (Psb) (W) | N/A |
| Standby power (Pnet) (W) | N/A |
| Driver suitable for dimming : | no |

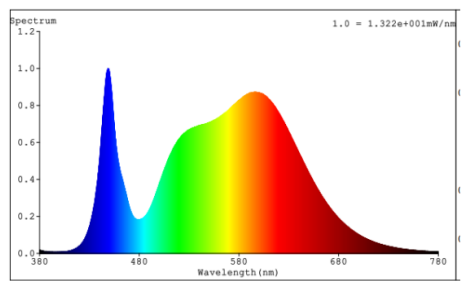