
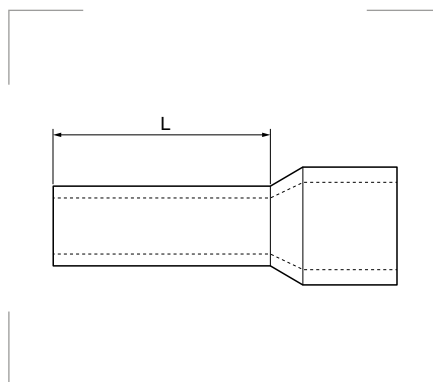


Punteras aisladas de punta hueca – SISTEMA DIN

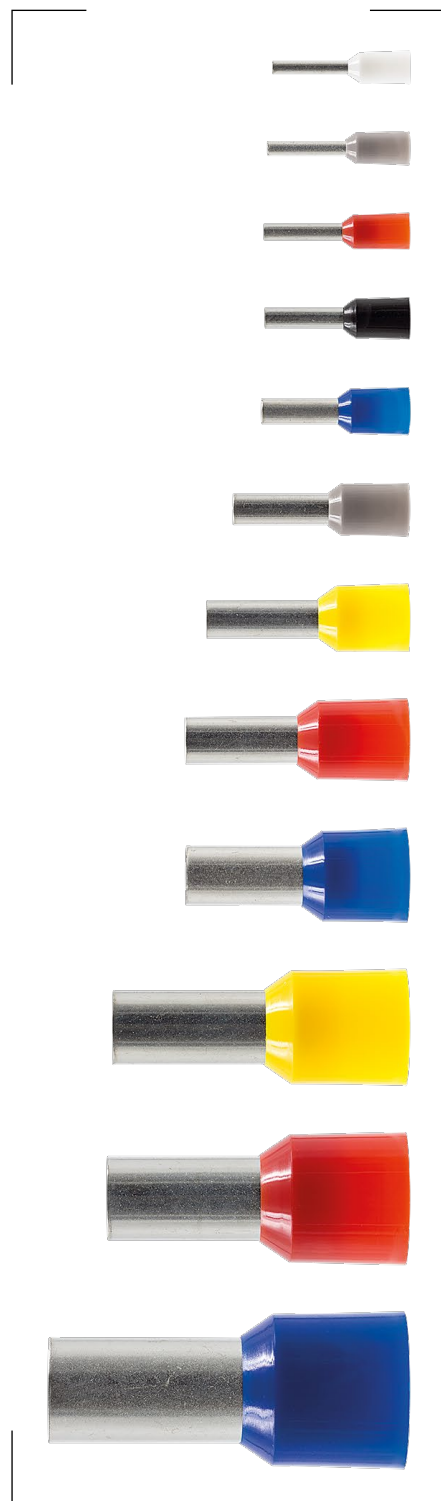

Materiales

Poliamida 6.6 norma DIN 46228/4.

Certificados y normas aplicables



Temperatura de trabajo

-40°C a 105°C.

Referencia	Color	Sección mm ²	L mm	Embalaje unidades
DIN-0,50		0,50	8	500
DIN-0,50C			8	100
DIN-0,50-L			10	500
DIN-0,50-LC			10	100
DIN-0,75		0,75	8	500
DIN-0,75C			8	100
DIN-0,75-L			12	500
DIN-0,75-LC			12	100
DIN-1		1,00	8	500
DIN-1C			8	100
DIN-1-L			12	500
DIN-1-LC			12	100
DIN-1,50		1,50	8	500
DIN-1,50C			8	100
DIN-1,50-L			18	500
DIN-1,50-LC			18	100
DIN-2,50		2,50	8	500
DIN-2,50C			8	100
DIN-2,50-L			18	500
DIN-2,50-LC			18	100
DIN-4		4,00	10	200
DIN-4C			10	100
DIN-4-L			18	200
DIN-4-LC			18	100
DIN-6		6,00	12	100
DIN-6-L			18	100
DIN-10		10,00	12	100
DIN-10-L			18	100
DIN-16		16,00	12	100
DIN-16-L			18	100
DIN-25		25,00	16	100
DIN-25-L			22	100
DIN-35		35,00	16	100
DIN-35-L			22	100
DIN-50		50,00	20	100
DIN-50-L			22	100