




Light Source Technical DataSheet

EAN	3276007963496
Product Supplier reference	T090-C-3630120-B
Type of product	Containing product
Supplier's address	ADEO Services - 135 rue Sadi Carnot - CS00001. 59790 RONCHIN
Supplier's name or trade mark	INSPIRE
Replaceability of Light source	non-replacable
Replaceability of separate control gears	by end-users
Light sources maker model	T090-C-3630120-W-LS
Link to EU Product Data base	https://eprel.ec.europa.eu/screen/product/lightsources/2470392
Spectral power distribution in the range 250 nm to 800 nm. at full-load	 The graph shows the spectral power distribution (SPD) of the light source. The x-axis represents Wavelength (nm) from 380 to 780. The y-axis represents Spectrum from 0.0 to 1.2. A sharp peak is visible in the blue region around 450 nm, and a broad, multi-colored spectrum covers the rest of the visible range. A scale factor of 1.0 = 1.102e+002mW/nm is indicated.
The reference control settings, and instructions on how they can be implemented,	The light source of the product can be set to different CCT: 2700K to 7000K by specific dimmer
If the light source is dimmable: a list of dimmers it is compatible with, and the light	DIP switch for color temperature
If the light source contains mercury: instructions on how to clean up the debris in	Not Applicable
Recommendations on how to dispose of the light source / Driver at the end of its life Directive 2012/19/EU	Electrical product must not be thrown out with domestic waste. They must be taken to a communal collecting point for environmentally friendly disposal in accordance with local regulations. Contact your local authorities or stockist for
Driver maker model	SEHD034D0870YD1
Maximum output power of the driver (for HL, LED and OLED) or the power of the light source for which the driver is intended (for FL and	30
Type of light source(s) for which it is	LED
Efficiency in full-load	85.90%
No-load power (Pno) (W)	0.44
Standby power (Psb) (W)	0.39
Standby power (Pnet) (W)	N/A
Driver suitable for dimming :	yes

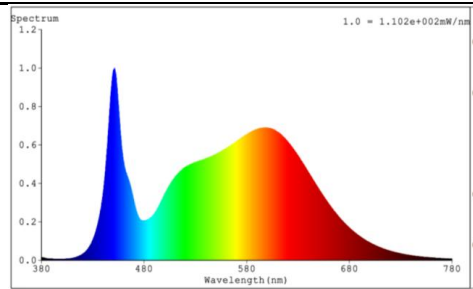