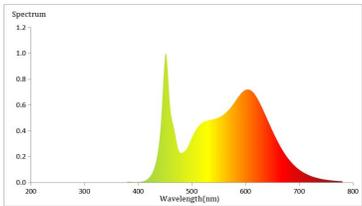


EAN	3276008000534
Product Supplier reference	GU1028DCRM
Supplier's name or trade mark	LEXMAN
Light sources maker model	GU1028DCRM
Equivalent models already placed on the market	
Useful luminous flux (lm)	330
Correlated colour temperature (K)	2200
Correlated colour temperature (K)	2700
Correlated colour temperature (K)	4000
Correlated colour temperature (K)	5000
On-mode power (W)	2.8
Standby power (W)	0.50
Colour rendering index	80
Spectral power distribution in the range 250 nm to 800 nm. at full-load	
Beam angle (degree)	100
Displacement factor	/
Colour consistency in McAdam ellipses	6
Flicker metric	0.1
Stroboscopic effect metric	0.1
References to the harmonised normes and standards	(EU)2019/2020 (EU)2019/2015 (EU)2021/340 (EU)2021/341
Testing conditions if not described sufficiently in previous harmonised standards	Not Applicable
Calculations performed with the parameters	$\eta_{TM} = (\phi_{USE} / P_{ON}) \times FTM$
With FTM =	1.176
The reference control settings, and instructions on how they can be implemented, where applicable	
Specific precautions that shall be taken when the model is assembled. installed. maintained or tested	No specific precautions
Instructions on how to remove LED Module and/or Driver	
Step 1	
Picture	
Tools	