

PROYECTOR LED SLIMLINE

CON CAMBIO DE COLOR INTEGRADO EN EL CUERPO

Características de Producto

- Proyector doméstico adecuado para aplicaciones residenciales
- Cuerpo de aluminio y cristal templado
- Innovadora rótula multiposición Fit & Tilt para un enfoque direccional perfecto
- Soporte de acero para una sencilla instalación
- Pre-cableado con 30cm de manguera aislante H05RN-F
- Cambio de temperatura de color 3000K-4000K-6500K a través de un interruptor instalado directamente en la parte trasera del proyector




CAT NO.	LUMINARIA LÚMENES	POTENCIA	EFICIENCIA Lm/W	VOLTAJE	ÁNGULO DE APERTURA
EFLD10BCCBR	1200	10W	120	220-240	110°
EFLD20BCCBR	2400	20W	120	220-240	110°
EFLD30BCCBR	3600	30W	120	220-240	110°
EFLD50BCCBR	6000	50W	120	220-240	110°

Dimensiones de Producto

CAT NO.	LARGO MM (L)	ANCHO MM (AN)	ALTO MM (AL)
EFLD10BCCBR	114	40	94
EFLD20BCCBR	129	40	104
EFLD30BCCBR	144	40	116
EFLD50BCCBR	184	40	148

Dibujo de producto

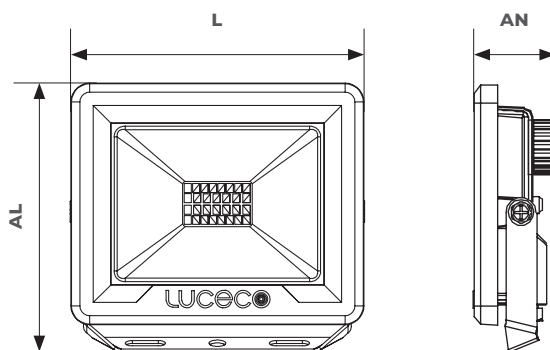

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaires – General requirements
EN 60598-2-5	Luminaires – Floodlights
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)