



Installation Manual of PV Modules

NINGBO ULICA SOLAR CO., LTD

<http://www.ulicasolar.com>

2025. 08. 06

CONTENTS

1 Introduction	1
2 Safety Precautions.....	1
2.1 General Safety	1
2.2 Fire Safety	3
3 Site Selection and Angle	3
3.1 Installation Environment Selection.....	3
3.2 Inclination Selection	4
4 Installation	6
4.1 Module Identification.....	6
4.2 Installation Safety	7
4.3 Installation Instruction.....	9
4.4 Grounding.....	18
4.5 Electrical Installation	19
5 PV Module Maintenance	22
5.1 Visual Inspection and Replacement.....	22
5.2 Connector and Cable Inspection.....	23
5.3 Cleaning.....	23
5.4 Weeding.....	25
5.5 Trouble Shooting.....	25
6 Reporting Technical Issues and Claims	25

1 Introduction

- Firstly, thank you for choosing our products. This manual is only applicable to the installation, maintenance, and use of PV modules produced by Ningbo Ulica Solar Co., Ltd. (hereinafter referred to as "Ulica Solar"). Please read this manual carefully before operating, installing, or maintaining the modules. Failure to follow these safety instructions may result in personal injury or property damage.
- Installation of PV modules requires professional skills, and only professionals can engage in this work. Please read the " Safety Precautions, Installation Safety and Installation Instruction " carefully before installing and operating the modules. The installer must inform the end customers (or consumers) of the above matters accordingly.
- The term "module" or "PV module" in this manual refers to one or more Ulica Solar modules. Please retain this manual for future reference.

Disclaimer

Ulica Solar reserves the right to change this manual without noticing in advance. This manual is not a Limited Warranty of PV module and does not have any warranty meaning. Failure to follow the requirements outlined in this manual during the handling (including without limitation to packing/unpacking, loading/unloading, transportation, storage, installation, use, operation or maintenance, etc.) of the products will result in the invalidity of product's limited warranty. Ulica Solar is not responsible for any damages of any kind, including but not limited to any product damages, personal injury or any other property losses, as resulting from any improper operations or faults by the customers during the handling of the products as failure to follow the instructions in this manual.



Warning

Otherwise, the product may be damaged or the user's personal safety may be endangered.



Prohibition

Otherwise, the product may be damaged or the user's personal safety may be endangered.

2 Safety Precautions

2.1 General Safety

- Before installing, wiring, operating, or maintaining modules, all safety regulations should be read and understood. When the solar cell surface of the module is directly exposed to sunlight or other light sources, direct current (DC) will be generated. Regardless of whether the module is connected or not, direct contact with the charged parts of the module, such as wiring terminals, may cause personal injury or death.

- Regardless of whether the PV module is connected to the system or not, appropriate protective measures should always be taken when contacting the module, such as insulated tools, safety helmets, insulated gloves, safety belts, and safety insulated shoes. When you need to install, ground, wire, clean, and perform other operations on modules, please be sure to use appropriate electrical safety protection tools. Avoid direct contact with modules, which may cause electric shock or cuts.

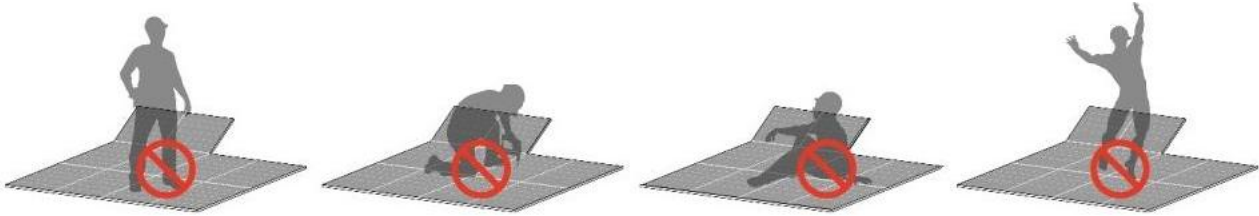


Figure 1: Do not stand, step, sit, lie down, walk or jump directly on the module or module packaging

- Do not stand, step, sit, lie down, walk or jump directly on the module or module packaging.
- The PV module does not contain any serviceable parts. Do not disassemble or move any part of the module.

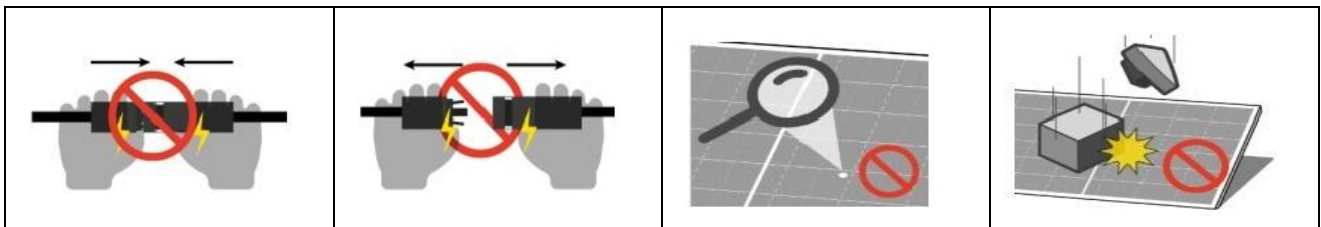


Figure 2: Do not disassemble or move any part of the module. Do not artificially concentrate sunlight and impact module

- Do not damage or scratch the front- or backside surfaces of the module, which may directly affect the product safety. If you detect any cuts on the module front- or backside, please do not use the module at all.
- Do not stack heavy or sharp objects on the modules.
- Do not lift the module by directly lifting or pulling the junction box or connector cables.
- Do not pull, scratch or bend the output cables with force. Otherwise, the insulation part of the output cables will be damaged, leading to current leakage or electric shock.
- Do not insert any conductive material into the connectors of the modules.
- Do not connect or disconnect the module when there is a current flow, or connected with any powered system.
- Do not use water to extinguish fires without disconnecting the power supply.
- Do not artificially concentrate sunlight on the module.
- Do not drop PV modules or allow objects to hit or fall directly on the modules.
- Do not carry modules on your head.
- Do not use ropes to carry modules.
- Do not carry modules on your back.

- During the normal operation of modules, they should not be blocked by buildings, trees, chimneys, etc. at any time of the day.
- Keep the junction box cover closed at all times.
- Protect junction box or connector from coming into contact with oil-based substances, organic solvents, other corrosive materials, or other substances that may cause malfunction. Further use is not allowed if junction box and connectors are contaminated.
- Junction boxes and connectors should be protected from direct sunlight and water immersion.

Commonly, a solar photovoltaic module is likely to experience conditions that produce more current and/or voltage than reported at standard test conditions. The requirement of National Electric Code (NEC) in Article 690 shall be following to address these increased outputs. In installation not under the requirement of the NEC, the values of I_{sc} and V_{oc} marked on this module should be multiplied by a factor of 1.25 when determining component voltage ratings, conductor current ratings, fuse sizes and size of controls connected to the PV output. Factors to consider include module temperature and front side irradiance (and, for bifacial dual glass products, ground or roof albedo, row spacing, and installation height).

2.2 Fire Safety

When installing modules on the rooftop, please refer to local laws and regulations before installation and abide by the requirements on building fire protection. The roof should be covered with a layer of fireproof materials and make sure that the backsheet and the mounting surface are fully ventilated. Different roof structures and installation methods will affect fireproof performance of buildings. Improper installation may lead to the risk of fire. Please use proper module accessories such as fuse, circuit breaker and grounding connector according to local regulations.



Do not install or use modules near open flames or flammable and explosive materials.

According to the Standards of UL 790, For single Glass PV module, the spread of flame test specification and the burning brand test specification is Class C; For Double Glass PV module, the spread of flame test specification is Class A and the burning brand test specification is Class C.

3 Site Selection and Angle

3.1 Installation Environment Selection

- Ulica Solar recommends modules installing environments with temperatures ranging from -40°C to 70°C .

- Modules should be installed in areas with no shadows throughout the year as much as possible. Although bypass diodes have been installed in the modules, shadows can still affect their optimal performance and operational safety.
- Do not install modules where there is a risk of water immersion or continuous exposure to sprinklers or fountains.
- When installing solar modules on the rooftop, a safe working area must be left between the roof edge and the outer edge of the PV array.
- When stacking module on the rooftop, the rooftop should tested for such loading and the installation plan must be developed in accordance with the specification requirements.
- When using the modules in areas with high wind load and snow load, the supporting structure design should be carried out in strict accordance with the local design specifications, to ensure that the external load does not exceed the mechanical strength limit that the modules can withstand.
- Salt spray corrosion tests conducted in accordance with IEC 61701 have shown that Ulica Solar's PV modules can be installed near offshore or in the corrosive environment. However, the modules shall not be immersed in water or in a permanently wet environment (e.g., fountains, spindrift, etc.). There is a risk of corrosion if the module is placed in a salt spray (i.e., a marine environment) or in an environment containing sulfur (e.g., volcanoes, etc.).
- In the place, 50~500 m away from the sea, stainless steel or aluminum materials must be used to install the PV modules, and the installation position must be processed with anti-corrosion treatment.

3.2 Inclination Selection

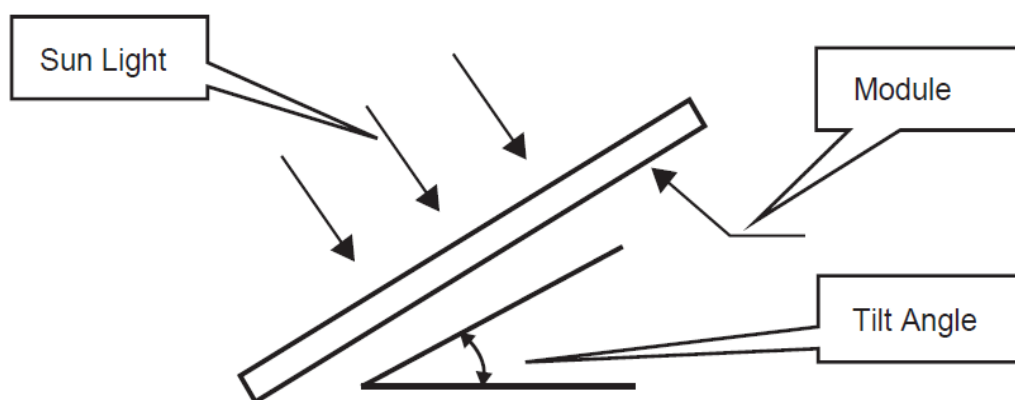


Figure 3 Schematic diagram of module installation inclination angle



- The tilt angle of the PV module refers to the angle between the module and the horizontal ground. The tilt angle should be selected according to the local conditions for different projects. Ulica Solar recommends that the mounting tilt angle should not be less than 10°. For specific tilt angles, it shall be chosen in accordance with the local design procedures, specifications and regulations, or following the recommendations of the experienced PV module installers.
- The PV modules is highly recommended facing south in the northern hemisphere and north in the southern hemisphere to get the best performance.
- Following the local regulations, if PV modules are installed in North America and any other country or region comply to UL standard. A minimum of 100mm (3.94inch, recommended value) clearance should be left between the PV module (backside) and the wall or roof surface. If other installation methods are used, the PV module's UL certification or fire class rating may be affected.

4 Installation

4.1 Module Identification



There are two types of labels in every module, providing the following information:

- (1) Nameplate: Information such as product type, rated power, rated current, rated voltage, open-circuit voltage, short-circuit current, certification mark, and maximum system voltage under standard testing conditions.
- (2) Serial Number label: Each module has a unique serial number. This serial number is printed on the bar code, which is placed in the module before lamination, and cannot be torn or smeared after lamination. In addition, two identical serial number can be found on or next to the module label or on the aluminum frame of the module.

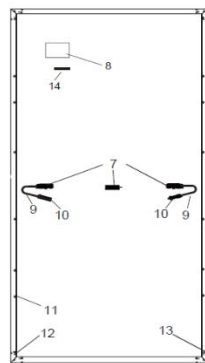


1 Frame	2 Glass	3 Encapsulate Material	4 Solar Cell
5 Backsheet	6 Silica Gel	7 Junction Box	8 Nameplate
9 Cable	10 Connector	11 Mounting Hole	12 Grounding Hole
13 Drain Hole	14 Bar Code		

Figure 4 Schematic diagram and module description of single glass module structure

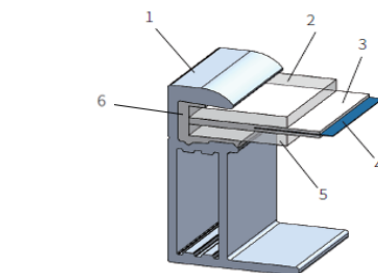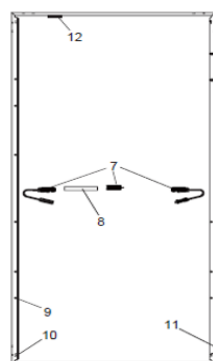

Bifacial Modules (With Frame)

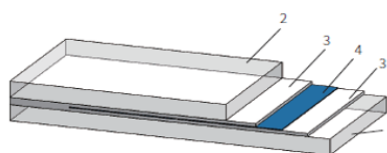

Bifacial Modules (Frameless)

1 Frame	2 Front Glass	3 Encapsulate Material	4 Solar Cell
5 Back Glass	6 Silica Gel	7 Junction Box	8 Nameplate
9 Mounting Holes	10 Grounding Holes	11 Drain Holes	12 Bar Code

Figure 5 Schematic diagram and module description of double glass module structure

4.2 Installation Safety

- Ulica Solar recommends that module installation should only be conducted by specialized persons with experience in PV system installation. All installation work must be in full compliance with the local regulations and the relevant international electrical standards.
- The fire rating of Ulica Solar modules must comply with relevant standards or local laws and regulations.
- Before installation, please carefully check the modules for abnormalities such as glass bursts, cell cracks, backsheet scratches, deformation of installation holes, broken junction boxes or missing covers, nameplates falling off or missing, and broken cables or connectors, etc. If any of such situation is found, please contact Ulica Solar customer service in time.
- Before installation, please keep modules' electrical components clean and dry. Connectors may be corroded if they are in connected under wet conditions or with water inside the conductive parts. Any corroded modules shall not be used.
- The cable length of junction box should be selected according to the installation mode. When wiring, the ties for fixing the cables coils should be removed. The cable should be fixed on the installation system (frame or bracket, guide rail) with UV resistant cable ties, in cable conduits or wire cards to avoid direct sunlight or immersion in water and mechanical damage of the cable; otherwise, it may cause accelerated aging of the cable or even leakage and fire. Bifacial dual glass products should also avoid blocking the solar cells on the back of the module.



- Do not install modules under rain, snow or windy conditions.
- If installing or operate modules in the morning after rain or with dew, appropriate protective measures need to be taken to prevent moisture from seeping into the connector.
- Do not allow unauthorized persons to access the installation area.
- When using scaffolding for installation, it should be ensured that the scaffolding is in a stable position or with anti-dumping measures. Installation personnel should wear safety belts in accordance with local building codes.
- It is recommended not to stand on the bottom side of the inclined surface of the module during installation, to prevent the module from slipping and causing casualty.
- Please keep the PV module packed in the carton until installation and install them immediately after unpacking.
- Do not wear metallic jewelry which can cause electric shock during installation.

- Installation work must be carried out by at least two persons.
- Do not stand on the module glass during work to avoid injury or electric shock caused by broken glass.
- Do not loosen or unscrew the screws/clamps/rails of and around the PV module, which may lead to a reduction of the module's load rating and even fall off.
- During installation and wiring of PV modules, please use opaque material to cover the PV module surface completely.
- Do not drop any tools or other objects on the front- or backside of the module, which may cause visible or invisible damage to the module.
- Do not install or use damaged modules. If the surface glass is damaged or worn, direct contact with the surface of the module may cause electric shock.
- Do not damage the backsheet or glass of modules when fastening the modules to the bracket with bolts.
- Do not drill additional holes on any part of the module, doing so will void the Limited Warranty.
- During installation or use, the drain holes must not be blocked under any situation.
- If the system circuit is connected to the load, please do not unplug the connector.
- Modules with different colors should be avoided to install on the same rooftop or in the same array.

4.3 Installation Instruction

- The PV modules must be installed in accordance with the installation instructions specified in this manual to comply with the IEC certification. Before installing, please read this section carefully to familiarize yourself with the complete installation processes.
- If the module fails due to the use of unsuitable accessories or improper installation, the Ulica Solar Limited Warranty will be voided.
- Due to gravity, the modules will sink to varying degrees, The sinking ΔL : Module deflection, located in the center of the module, as shown in Figure 6. Please note that applying external heavy pressure to the surface of the module may cause the glass surface to sink more when storing, transporting, and installing modules. The installation method of clamps only on the short side can easily cause slight bending and sagging of the aluminum frame due to the large span of the module. For customers who are concerned about this phenomenon, Ulica Solar does not recommend this installation method. Adding a rail to support the middle part of the long side of the module can effectively avoid this phenomenon.

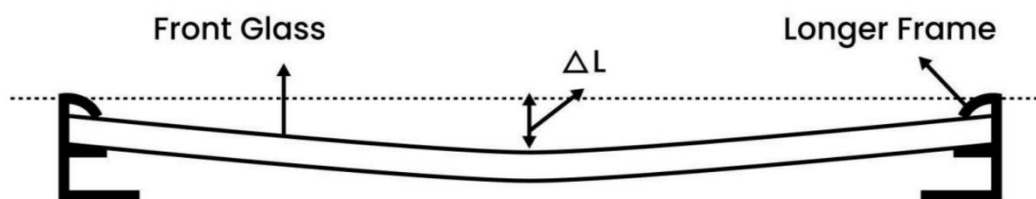


Figure 6 Schematic diagram of module deflection (ΔL : module deflection)

- The mechanical loads described in this manual are the test loads. For calculating the equivalent maximum design loads, a safety factor of 1.5 (Mechanical loads=Design loads $\times$ 1.5 security coefficient) needs to be considered in compliance with the requirements of the local laws and regulations. The design loads are strongly related to the construction, applied standards, location and local climate conditions; therefore, have to be determined by the racking suppliers and/or the professional engineers. For detailed information, please follow local structural code or contact your professional structural engineer.
- The minimum distance between two modules is 5mm (0.2inch). If using special trackers, the minimum distance should be selected according to the technical requirements of the tracker suppliers.

NOTE

Module and mounting system connection can be realized by Mounting holes, clamps or embedded systems. Installation shall follow the demonstration and suggestions below. If installation mode is different, please consult Ulica Solar and obtain approval. Otherwise, modules may be damaged and limited warranty will be invalid.

(I) Screw Installation



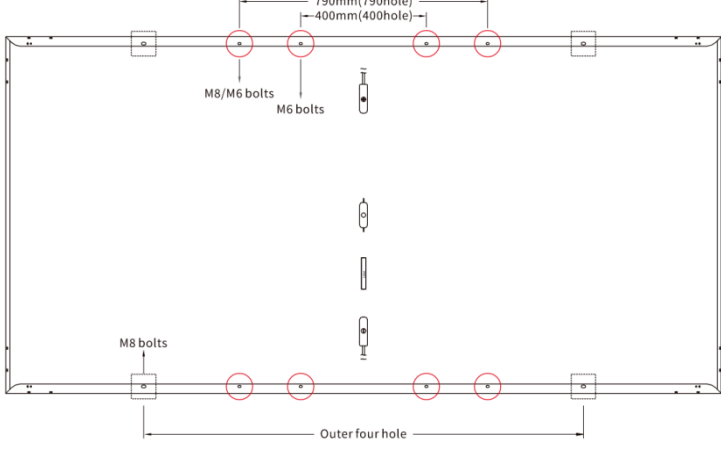
Mounting diagram	Dimensions (Unit:mm)
	2278*1134*30 2279*1134*35 2382*1134*30 2382*1134*33 2382*1134*35 2384*1303*33 2384*1303*35
	1722*1134*30 1762*1134*30 1800*1134*30 1952*1134*30 1961*1134*30
Note: 1、 400 and 790 mounting holes are used for matching with the tracking bracket system products. 2、 Some modules do not have 400 mounting holes, please refer to the Product Datasheet for details. 3、 For installation of other module dimensions and mounting hole sizes other than the above table, please consult Ulica Solar and obtain approval.	

Figure 7 Installation hole positions of modules

- The torque range for tightening M8 bolt is 12N•m~16N•m; The torque range for tightening M6 bolt is 8N•m~12N•m.
- When selecting Ulica Solar's 30mm (30H) high frame module, it is recommended to choose fasteners with a length of $L \leq 20\text{mm}$ ("L" indicates bolt length). (If there are special models, you can consult Ulica Solar's customer service).
- Each frame has 8~12 installation holes with a diameter of 9*14mm or 7*10mm on its frame, which ideally placed to optimize the loading capacity to secure the modules on the supporting structure.
- To maximize service life of modules, Ulica Solar strongly recommends the use of corrosion proof (stainless steel) fixings. All parts of the module connection should use flat stainless washers with a minimum thickness of 1.8mm and an outer diameter of 20~24mm (0.79~0.94inch).

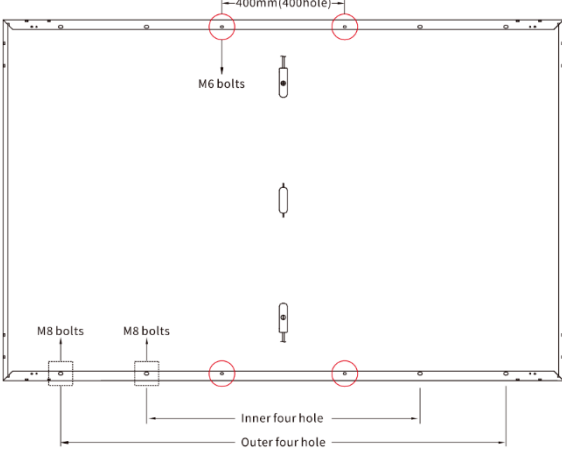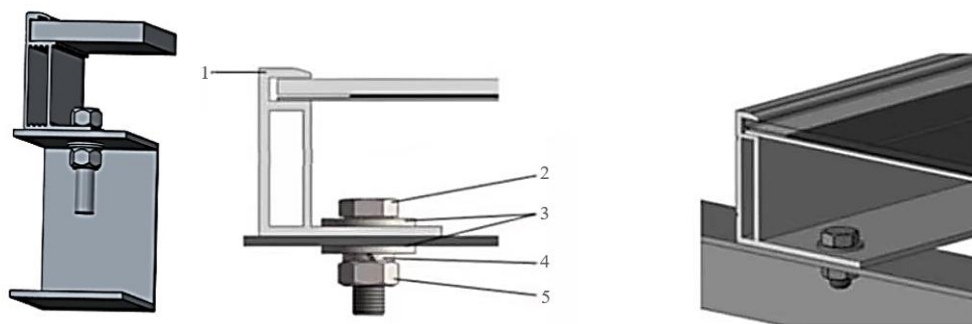

1. Aluminum frame 2. M8 stainless bolt 3. Flat stainless washer 4. Spring stainless washer 5. M8 stainless nut

Figure 8 Schematic diagram of screw installation

Recommended accessories are as below:

Accessories	Model		Material	Note
Bolt	M8 (full thread recommended)	M6 (full thread recommended)	Q234B/SUS304	Accessories material selection should be based on application environment
Washer	2*M8 Thickness $\geq$ 1.5mm Outer diameter $\geq$ 16mm	2*M6 Thickness $\geq$ 1.5mm Outer diameter $\geq$ 12~16mm	Q234B/SUS304	
Spring Washer	8mm	6mm	Q234B/SUS304	
Nut	M8	M6	Q234B/SUS304	

Table 1 Accessories required for installation

(II) Clamp Installation

- Ulica Solar has tested its modules with a number of clamps from different manufacturers, it is recommended to use fixing bolt of at least M8. The clamp shall not be malfunctioned due to deformation or corrosion during the loading process. It is recommended to use a clamp with length of $\geq 50\text{mm}$ (1.97inch) and thickness of $\geq 4\text{mm}$ (0.16inch), aluminum alloy 6005-T6, Rp0.2 $\geq 225\text{MPa}$, Rm $\geq 265\text{MPa}$. (The clamp shall be selected to guaranty the module installation reliability recommended torque range is for reference only).
- The clamp must overlap the A surface of module frame by at least 8mm (0.32inch) but not more than 10mm (0.39inch).
- For installation where mounting rails run parallel to the frame, the frame must overlap the rails completely or the overlapping distance must $\geq 20\text{mm}$. As shown in Figure 9.

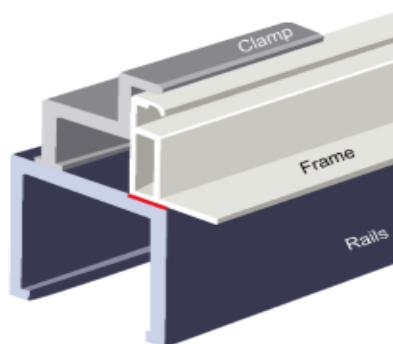


Figure 9: —The frame must overlap the rails completely or the overlapping distance must $\geq 20\text{mm}$

- Since the specification of clamps is not uniform in the market and the clamps have a large impact on the wind load resistance in system side, it is recommended to follow the recommendation of

Ulica Solar to choose clamps. You can also customize the clamps by yourselves, but please make sure that the modules do not detach from the brackets and rails.

- The clamps cannot be out the edge of the module under any circumstances.
- Please make sure to avoid shading effects from the module clamps.
- The module frame shall not be modified under any circumstances.
- The clamp should avoid touching the glass or deforming the frame of the assembly, and the surface of the clamp in contact with the front of the frame must be flat and smooth, otherwise it will damage the frame and cause module breakage.
- When choosing clamp installation method, use at least four clamps on each module. Depending on local wind and snow loads, additional clamps may be required to ensure that modules can bear the extra load.
- Applied torque should refer to mechanical design standard according to the bolt customer is using, for example: M8: 10-14 N•m.

The installation method of the clamp is shown in the figure below:

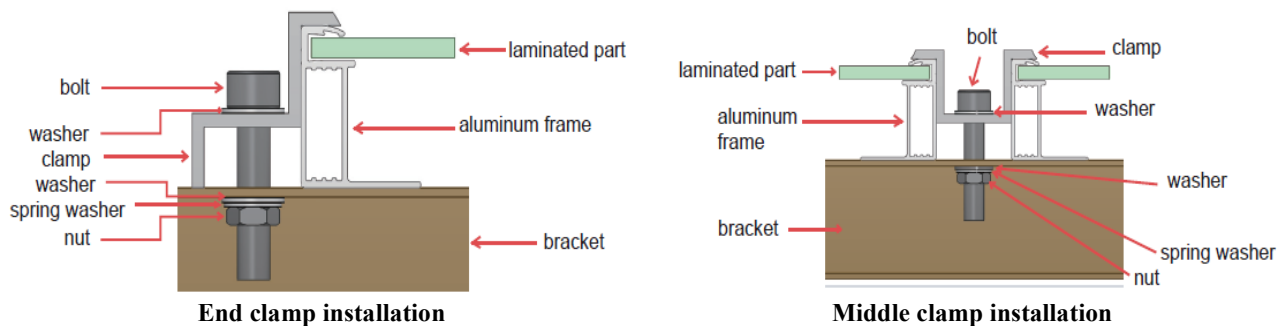


Figure 10 Schematic diagram of clamp installation

(III) Module Type and Specification

Module type	Dimensions (Unit:mm)	Cell size (Unit:mm)	Cell type
UL-***M-108ADGN(***=410-445W)	1722*1134*30	182.2*91	N
UL-***M-96DDGN(***=420-450W)	1762*1134*30	182.2*105	N
UL-***M-108BDGN(***=420-460W)	1762*1134*30	182.2*94	N
UL-***M-108CDGN(***=430-485W)	1800*1134*30	182.2*95.8	N
UL-***M-120BDGN(***=465-510W)	1952*1134*30	182.2*94	N
UL-***M-108DDGN(***=470-505W)	1961*1134*30	182.2*105	N
UL-***M-144ADGN(***=545-595W)	2278*1134*30	182.2*91	N
UL-***M-132DDGN(***=575-620W)	2382*1134*30	182.2*105	N
UL-***M-156ADGN(***=595-620W)	2382*1134*30	182.2*88	N
UL-***M-144CDGN(***=570-620W)	2382*1134*30	182.2*95.8	N
QIN-UL-***M-144CDGN(***=600-660W)	2382*1134*30	182.2*97.5	N
UL-***M-132DG(***=640-670W)	2384*1303*33	210*105	P
UL-***M-132DG(***=640-670W)	2384*1303*35	210*105	P
UL-***M-132DGN(***=670-725W)	2384*1303*33	210*105	N





Table 2 Bifacial dual glass products and main specifications (Unit: mm)

Module type	Dimensions (Unit:mm)	Cell size (Unit:mm)	Cell type
UL-***M-108BHVN(***=420-465W)	1762*1134*30	182.2*94	N
UL-***M-108CHVN(***=430-475W)	1800*1134*30	182.2*95.8	N
UL-***M-120BHVN(***=465-515W)	1952*1134*30	182.2*94	N
UL-***M-144AHVN(***=545-585W)	2278*1134*30	182.2*91	N
UL-***M-144HV(***=525-560W)	2279*1134*30	182.2*91	P
UL-***M-132DHVN(***=575-620W)	2382*1134*33	182.2*105	N
UL-***M-144CHVN(***=570-630W)	2382*1134*35	182.2*95.8	N
UL-***M-132HV(***=640-670W)	2384*1303*33	210*105	P
UL-***M-132HV(***=640-670W)	2384*1303*35	210*105	P

Table 3 Monofacial of back sheet products and main specifications (Unit: mm)


4.3.1 Bifacial Dual Glass Products

The following installation methods are standard installation that are recommended by Ulica Solar. Installation methods and mechanical load of bifacial dual glass products. ("+" indicates the downforce load and "-" indicates the uplift load)

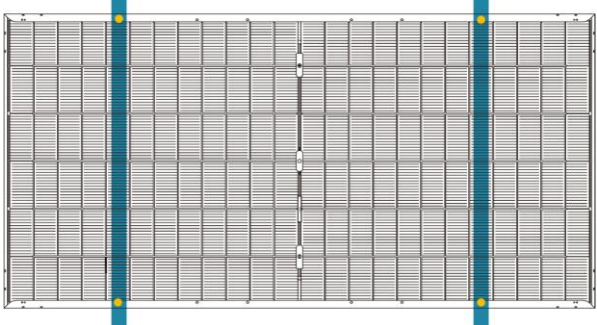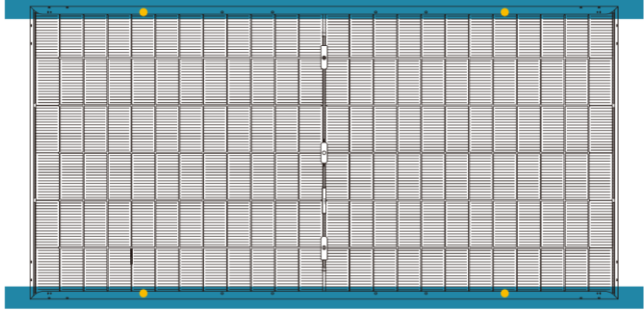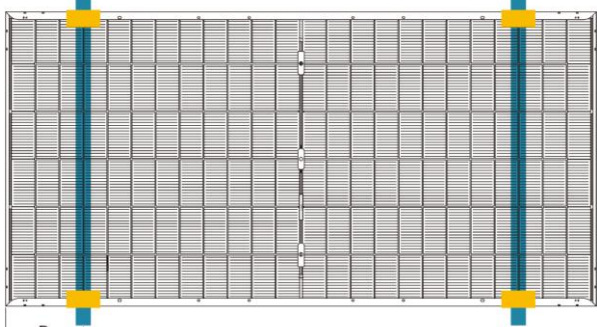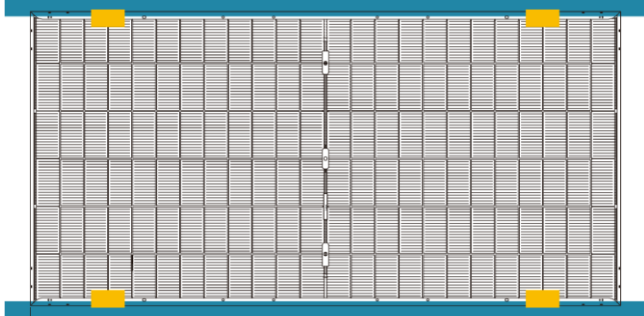Diagram of installation method of Bifacial Dual Glass Products (L is the length of the module)	
 Figure A The long side frame is installed with 4 screws. Mounting rails run perpendicular to the long side frame. (Outer 4 hole and inner 4 hole mounting)	 Figure B The long side frame is installed with 4 screws. Mounting rails overlap to the long side frame. (Outer 4 hole and inner 4 hole mounting)
 Figure C Use 4 Clamps on the long side. Mounting rails run perpendicular to the long side frame. (clamp length $\geq 50\text{mm}$, $1/4L - 50 \leq D \leq 1/4L + 50$)	 Figure D Use 4 clamps on the long side. Mounting rails overlap to the long side frame. (clamp length $\geq 50\text{mm}$, $1/4L - 50 \leq D \leq 1/4L + 50$)

Module type	Dimensions (Unit: mm)	Screw installation		Clamp installation	
		Figure A	Figure B	Figure C	Figure D
UL-***M-108ADGN(***=410-445W)	1722*1134*30	+5400Pa -2400Pa	+3600Pa -2400Pa	+5400Pa -2400Pa	+2400Pa -2400Pa
UL-***M-96DDGN(***=420-450W)	1762*1134*30				
UL-***M-108BDGN(***=420-460W)	1762*1134*30				
UL-***M-108CDGN(***=430-485W)	1800*1134*30				
UL-***M-120BDGN(***=465-510W)	1952*1134*30				
UL-***M-108DDGN(***=470-505W)	1961*1134*30				
UL-***M-144ADGN(***=545-595W)	2278*1134*30				
UL-***M-132DDGN(***=575-620W)	2382*1134*30				
UL-***M-156ADGN(***=595-620W)	2382*1134*30				
UL-***M-144CDGN(***=570-620W)	2382*1134*30				
QIN-UL-***M-144CDGN(***=600-660W)	2382*1134*30				
UL-***M-132DG(***=640-670W)	2384*1303*33				
UL-***M-132DG(***=640-670W)	2384*1303*35				
UL-***M-132DGN(***=670-725W)	2384*1303*33				





Other Clamp installation methods

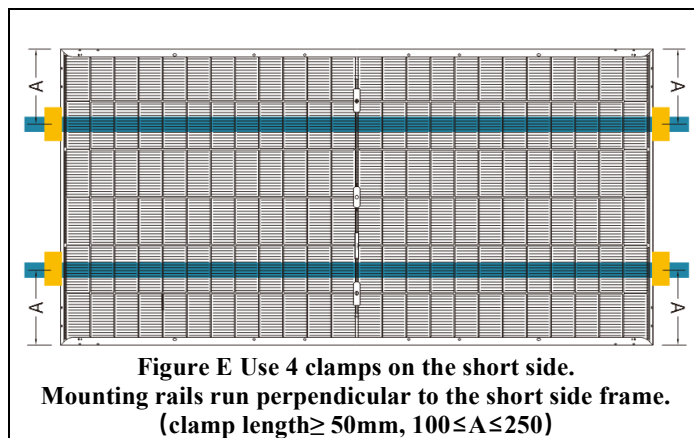

Module type	Dimensions (Unit: mm)	Figure E
UL-***M-108ADGN(***=410-445W)	1722*1134*30	+1400Pa -1400Pa
UL-***M-96DDGN(***=420-450W)	1762*1134*30	
UL-***M-108BDGN(***=420-460W)	1762*1134*30	
UL-***M-108CDGN(***=430-485W)	1800*1134*30	
UL-***M-120BDGN(***=465-510W)	1952*1134*30	+1200Pa -1200Pa
UL-***M-108DDGN(***=470-505W)	1961*1134*30	
UL-***M-144ADGN(***=545-595W)	2278*1134*30	Not recommended
UL-***M-132DDGN(***=575-620W)	2382*1134*30	
UL-***M-156ADGN(***=595-620W)	2382*1134*30	
UL-***M-144CDGN(***=570-620W)	2382*1134*30	
QIN-UL-***M-144CDGN(***=600-660W)	2382*1134*30	
UL-***M-132DG(***=640-670W)	2384*1303*33	
UL-***M-132DG(***=640-670W)	2384*1303*35	
UL-***M-132DGN(***=670-725W)	2384*1303*33	


4.3.2 Monofacial of Back Sheet Products

The following installation methods are standard installation that are recommended by Ulica Solar. Installation methods and mechanical load of monofacial of back sheet products. ("+" indicates the downforce load and "-" indicates the uplift load)

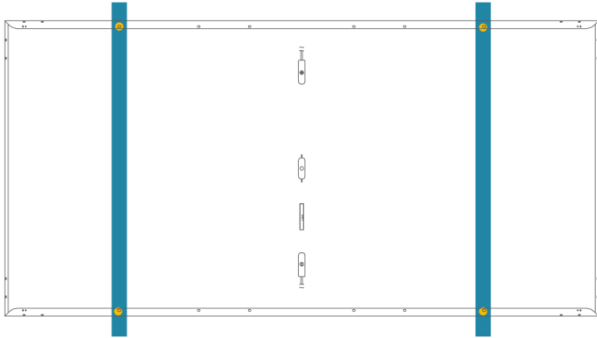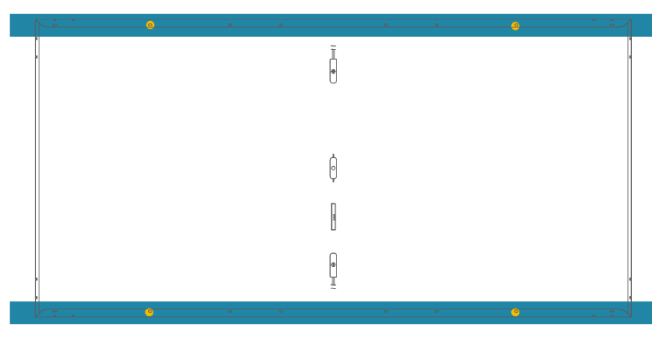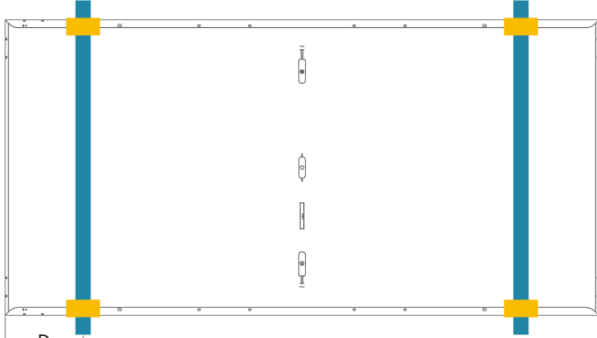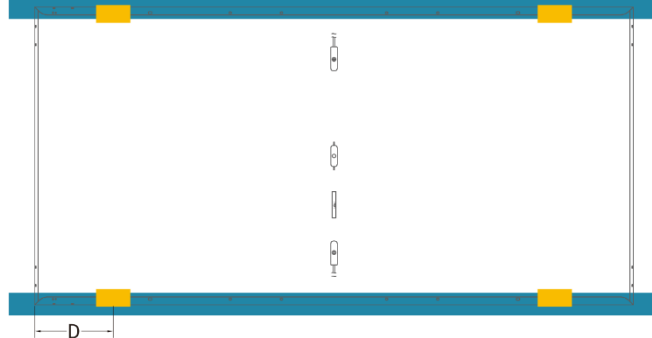Diagram of installation method of Monofacial of Back Sheet Products (L is the length of the module)	
 Figure F The long side frame is installed with 4 screws. Mounting rails run perpendicular to the long side frame. (Outer 4 hole and inner 4 hole mounting)	 Figure G The long side frame is installed with 4 screws. Mounting rails overlap to the long side frame. (Outer 4 hole and inner 4 hole mounting)
 Figure H Use 4 Clamps on the long side. Mounting rails run perpendicular to the long side frame. (clamp length $\geq 50\text{mm}$, $1/4L - 50 \leq D \leq 1/4L + 50$)	 Figure I Use 4 clamps on the long side. Mounting rails overlap to the long side frame. (clamp length $\geq 50\text{mm}$, $1/4L - 50 \leq D \leq 1/4L + 50$)

Module type	Dimensions (Unit: mm)	Screw installation		Clamp installation	
		Figure F	Figure G	Figure H	Figure I
UL-***M-108BHVN(***=420-465W)	1762*1134*30	+5400Pa -2400Pa	+3600Pa -2400Pa	+5400Pa -2400Pa	+2400Pa -2400Pa
UL-***M-108CHVN(***=430-475W)	1800*1134*30				
UL-***M-120BHVN(***=465-515W)	1952*1134*30				
UL-***M-144AHVN(***=545-585W)	2278*1134*30				
UL-***M-144HV(***=525-560W)	2279*1134*30				
UL-***M-132DHVN(***=575-620W)	2382*1134*33				
UL-***M-144CHVN(***=570-630W)	2382*1134*35				
UL-***M-132HV(***=640-670W)	2384*1303*33				
UL-***M-132HV(***640-670W)	2384*1303*35				

Other Clamp installation methods

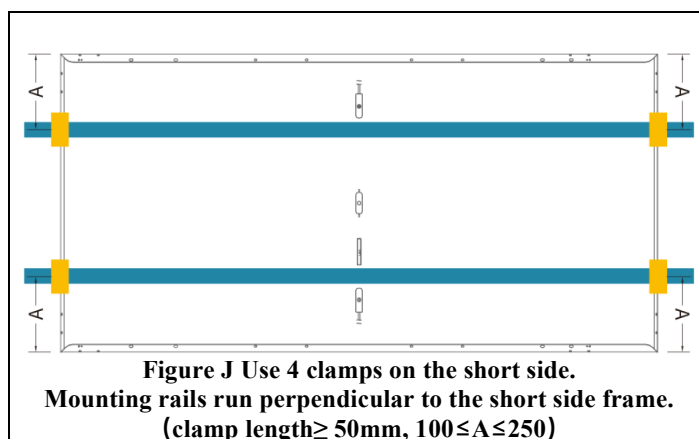

Module type	Dimensions (Unit: mm)	Figure J
UL-***M-108BHVN(***=420-465W)	1762*1134*30	+1400Pa -1400Pa
UL-***M-108CHVN(***=430-475W)	1800*1134*30	
UL-***M-120BHVN(***=465-515W)	1952*1134*30	+1200Pa -1200Pa
UL-***M-144AHVN(***=545-585W)	2278*1134*30	Not recommended
UL-***M-144HV(***=525-560W)	2279*1134*30	
UL-***M-132DHVN(***=575-620W)	2382*1134*33	
UL-***M-144CHVN(***=570-630W)	2382*1134*35	
UL-***M-132HV(***=640-670W)	2384*1303*33	
UL-***M-132HV(***640-670W)	2384*1303*35	

4.4 Grounding

- All module frames and mounting racks must be properly grounded in accordance with the electrical design and construction specifications, procedures, regulations and other special grounding requirements applicable to the installation sites.
- Proper grounding can be achieved by connecting the module frame(s) and all metallic structural components together by using a suitable grounding conductor. The grounding conductors or wires may be copper, alloy, or any other materials that are in accordance with the local electrical design and construction specifications, procedures, and regulations. The ground conductor must be reliably grounded by a suitable ground electrode.
- General grounding hardware comes in a package that includes the grounding screw, flat washer, star washer and wire and other relevant hardware should be made of stainless steel.
- Do not drill any extra ground holes for convenience, the Ulica Solar Limited Warranty will be voided.
- Ulica Solar does not provide grounding devices or materials. Any third-party grounding device that meets the requirements of the installation electrical equipment specifications can be used for grounding of Ulica Solar's modules. The grounding device should be installed in accordance with the operating manual prescribed by the manufacturer.
- Ulica Sola recommends using grounding wires with resistances that are less than 1Ω .
- The electrical contact is made by penetrating the anodized coating of the aluminum frame, and tightening the mounting screw (together with the star washer) to the proper torque of $3\sim 7\text{ N}\cdot\text{m}$.
- Grounding connections should be installed by a qualified electrician. Connect module frames together using adequate grounding cables: Grounding wire size (4mm^2 solid bare copper) should be selected and installed underneath the wire binding bolt. Holes provided for this purpose are identified with a grounding symbol $\perp$ (IEC61730-1). All conductive connection junctions must be firmly fixed.
- To avoid lightning strikes and ensure electrical safety, the module frames must be reliably grounded. Grounding between modules can be done using a 4mm^2 solid bare copper that connects adjacent ground holes on the module frame (unused installation holes on the frame can also be used for grounding).

Ulica Solar recommends using the following methods for grounding installation, as shown in Figure 11

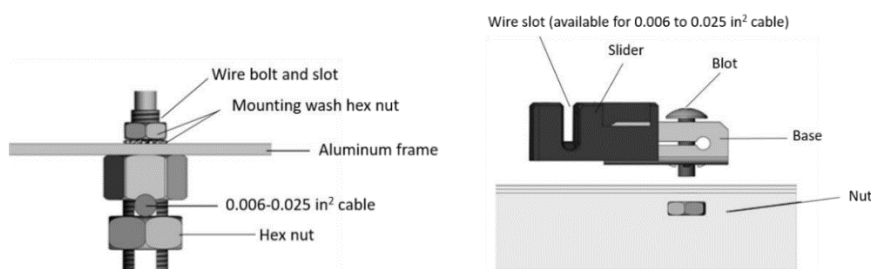


Figure 11. PV module grounding methods

4.5 Electrical Installation

4.5.1 Safety Instruction

- All wiring installation should be carried out by qualified installers in accordance with local electrical construction codes, procedures, and regulations.
- Modules can be connected in series to increase the operating voltage by connecting the positive terminal of one module into the negative terminal of the next one. Before connecting, always ensure that the contacts are corrosion-free, clean, and dry.
- The product can be irreparably damaged if an array string is connected in reverse polarity to another. Always verify the voltage and polarity of each string before making a parallel connection. If a reversed polarity or a difference of more than 10V between strings was detected, check the string configuration before connection.
- The standard copper cables applied in Ulica Solar modules are UV resistant and with across sectional area of $\geq 4\text{mm}^2$. All other cables applied to connect the DC system should be provided with a similar or larger wire cross section. Ulica Solar recommends that all cables are routed in appropriate conduits or rails where water does not accumulate.
- The string voltage must not be higher than the maximum system voltage, as well as the maximum input voltage of the inverter and the other electrical devices installed in the system. In order to ensure this, the open-circuit voltage of an array needs to be calculated at the lowest expected local ambient temperature, which can be determined using the following formula:

$$\text{Max System Voltage} \geq N \times V_{oc} \times [1 + TC_{voc} \times (T_{min} - 25)]$$

Where

N Number of modules in series

V_{oc} Open-circuit voltage (refer to product label or data sheet)

TC_{voc} Temperature coefficient of open-circuit voltage (refer to data sheet)

T_{min} The minimum ambient temperature

- The number of modules that can be connected should be determined by a qualified institution or person in accordance with design specifications of photovoltaic system and the local electrical design specifications. The calculation formula recommended by Ulica Solar shall be for reference only.
- Ulica Solar recommends that the maximum number of series modules is $[\text{Max System Voltage} / (V_{oc} \times 1.25)]$, and the maximum number of parallel module configurations is $[\text{Fuse Rating} / (I_{sc} \times 1.25)]$.
- Every module is provided with two standard output cables, and each terminated with a plug-and-play connector. All wiring and electrical connections must be installed in accordance with the electrical design and construction specifications, procedures and regulations at the place of installation.
- The minimum and maximum outer diameters of the cable are 5 to 7mm (0.20 to 0.28 inch).

- For wiring connections, please use standard PV copper wires with a cross-section area of at least 4mm^2 , and should be light-resistant and temperature-resistant at a minimum of 90°C .
- When installing modules flat on the roof, it is recommended to use $4\sim 6\text{mm}^2$ PV-specific cables.



Do not bend the cables less than 43 mm (1.69 inch) radius. PV cables will be damaged if bending radius less than 43 mm.




Figure 12. The correct routing and minimum bending radius of cables

4.5.2 Wiring


- In order to ensure the normal operation of the system, when connecting the module or loads (such as inverters, solar cells, etc.), observe to ensure that the polarity of the cable is connected correctly. If modules are not connected correctly, the bypass diode could be damaged. PV modules can be connected in series to increase the voltage and connected in parallel to increase the current.
- Before connecting the module, please make sure using the connector approved by Ulica Solar. Otherwise, Ulica Solar does not responsible for any potential problem.
- When conducting electrical connection of the modules, please use diagonal pliers to cut the cable tie. When cutting the tie, be careful not to scratch the cable and backsheet. According to the electrical requirements. The positive and negative connectors should be connected in turn, and confirm that you hear a "click" to indicate that the connection is successful. Otherwise, during the operation of the modules, this could lead to electric arc due to poor connections and can burn the connectors. Before the commissioning and operation of the power station, it is necessary to conduct electrical inspection on the modules and strings to confirm that the polarity of the strings is correct and that the open-circuit voltage meets the requirements of the acceptance specification.



- The number of modules in series and in parallel shall be designed reasonably according to the system configuration.

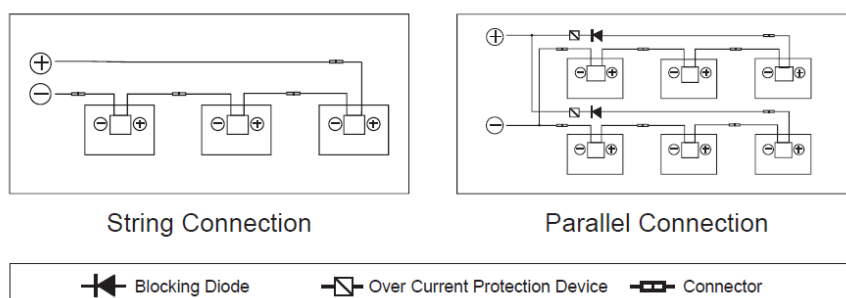

Portrait installation: Standard line length (Note: One end of the single row needs to be extended)

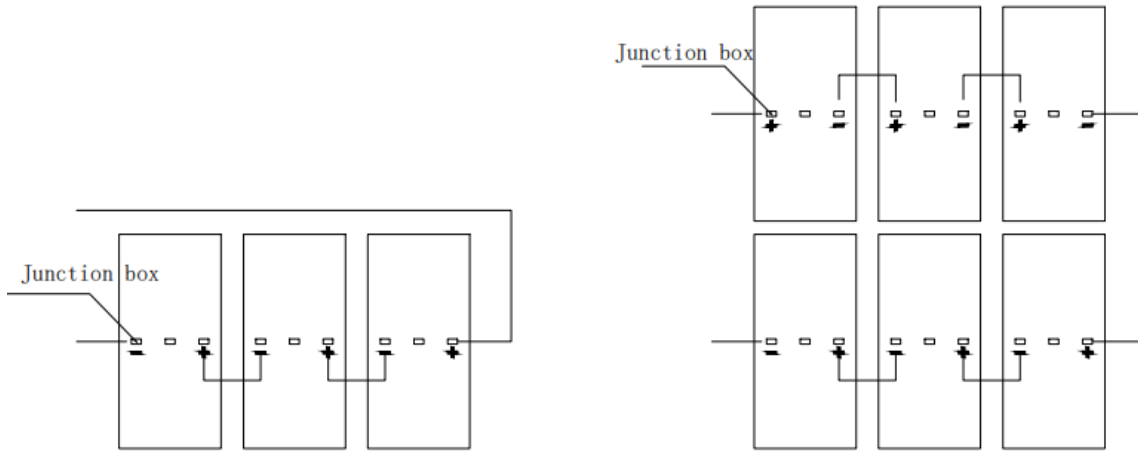

Landscape installation: The length of a single cable for a module with 120 cells must be $\geq 1.2\text{m}$, that for a module with 144 cells must be $\geq 1.4\text{m}$, and that for a module with 156 cells must be $\geq 1.5\text{m}$.

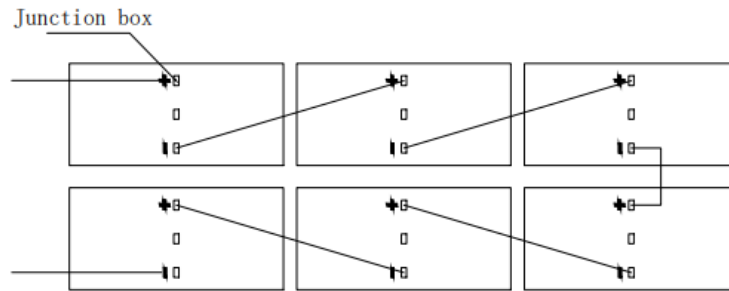


Figure 13. Circuit diagram for series connections and parallel connections & Reference for module connections

4.5.3 Fusing

- The correction factor of a fuse should be determined by an authorized professional electrical engineer in accordance with the relevant design regulations and system simulation results. Ulica Solar does not responsible for determining the minimum rating of fuse.
- The fuse rated current should be chosen depending on different standards, as follows:

$$\frac{1.5}{K_f} \cdot I_{SC} \leq I_n \leq \text{Max Series Fuse Rating (IEC standard)}$$

$$\frac{1.56}{K_f} \cdot I_{SC} \leq I_n \leq \text{Max Series Fuse Rating (NEC standard)}$$

Where

I_n : Fuse rated current [A]

I_{SC} : Short-circuit current of the module [A]

K_f : Temperature correction factor [-]

A correction factor (K_f) should be applied for determining the fuse rated current working at different temperatures. Please confirm the final fuse selection with the qualified design institutes and fuse manufacturer. The maximum series fuse rating value on the products' datasheet provided by Ulica Solar should be used for reference only.

5 PV Module Maintenance

5.1 Visual Inspection and Replacement

- The modules must be inspected and maintained regularly, which is the responsibility of the users.
The circuit breaker should be disconnected before the inspection. If the modules are damaged, such as broken glass, broken cables, and damaged junction boxes, it may cause functional and safety failures. If the module is damaged, replace the damaged module with a new module of the same type.
Do not touch the live part of the cable or connector.
- It is recommended to perform a preventive inspection every six months, and do not replace components of modules without authorization. If electrical or mechanical performance inspection or maintenance is required, it is recommended that qualified professionals should perform the operation to avoid electric shock or personal injury.
- The vegetation should be cut regularly to avoid shading and thus affecting the module's performance.
- Check if the mounting hardware is tightened correctly in place.
- Check whether all string fuses in each non-grounded pole are working properly.
- Please cover the front surface of modules with an opaque material during repairing. Modules exposed to sunlight can generate high voltage, which is extremely dangerous.
- Ulica Solar PV modules are equipped with bypass diodes in the junction box to minimize module heating and current losses.



- Before cleaning, make sure to wear PPE, such as insulated protective gloves, protective glasses, hard hats, safety insulated shoes, etc.
- When using scaffolding, it should be ensured that it is in a stable position or has anti-dumping measures. Installer should wear safety belts in accordance with local building codes.
- Do not stand on modules or brackets for cleaning work.
- Do not open the junction box to replace diodes, even if they fail.
- When performing special installations, it is necessary to wear cut-resistant gloves and other personal protective equipment.
- Before attempting to remove modules, be sure to isolate the impacted array string to prevent security incidents.
- Use the relevant disconnect tool provided by the supplier to disconnect the connector of the affected module.

- Check the open-circuit voltage of the array string and verify that the open-circuit voltage of other strings connected in parallel are within a range of 10V difference.
- Turn the circuit breaker on again after checking.
- Please pay attention to the other safety precautions listed at the beginning of this manual.

5.2 Connector and Cable Inspection

- The following preventive maintenance checks are recommended to be performed every 6 months:
- Check the sealant of the junction box to ensure there are no cracks or gaps.
- Check all connectors for tight connections and corrosion; check all aspects of connectors, bolt torque, and grounding; check that mounted hardware is tightened in place, loose connections will cause damage to array.
- Check all cables for rodent damage or material deterioration to verify the connections. In addition, cables should be protected from direct sunlight and kept away from areas with accumulated water.

5.3 Cleaning

5.3.1 Caution

This manual covers the requirements for the cleaning procedures of Ulica Solar PV modules. Professional installers should read these guidelines carefully and strictly follow these instructions. Failure to follow these instructions may result in death, injury, or property damage. Damages induced by inappropriate cleaning procedures will void Ulica Solar limited warranty. The amount of electricity generated by a PV module is proportional to the amount of light captured. A module with shaded cells generated less energy, and therefore, it is essential to keep PV modules clean. The dirt such as bird droppings, leaves, dust is usually need to be cleaned.

- Do not clean the modules during the hottest time of the day to avoid thermal stress on the modules.
When cleaning the modules, make sure that the temperature difference between the water and the module is in the range of -5°C to 10°C.
- Use a dry or wet, soft and clean cloth, sponge, or soft bristled brush to wipe the PV module. Please make sure that the cleaning tools do not wear out glass, backsheet, junction box, or frame.
- If there is greasy dirt or other substances which are difficult to clean, conventional household glass cleaning agents can be used. Pay attention not to use alkaline and strong acidic solvents, including hydrofluoric acid, alkali, acetone.
- For modules that are installed horizontally (0° tilt angle), they should be cleaned more frequently, as they do not have "self-cleaning" function as those installed at 10° or larger tilt angles.

- The back surface of the PV modules usually does not need to be cleaned. When the back of the bifacial dual glass products or monofacial of back sheet products is deemed necessary to be cleaned, avoid any sharp objects that may cause damage or penetrate the base material. The other cleaning requirements are the same as the front-side.
- Cleaning activities create risk of damaging the modules and array components, as well as increasing the potential electric shock hazard.
- Cracked or broken modules represent an electric shock hazard due to leakage currents, and the risk of shock is increased when modules are wet. Before cleaning, thoroughly inspect modules for cracks, damage, and loose connections.
- During the daylight, the voltage and current present in the array are sufficient to cause a fatal electric shock. PV modules should be cleaned at low irradiance.
- Please make sure that the array has been disconnected from other active components before starting the cleaning. Otherwise contact with exposed parts of live parts may cause injury.
- Wear suitable protective clothing (clothes, insulating gloves, etc.) when cleaning the modules.
- Do not immerse the module, partially or totally, in water or any other cleaning solutions.
- Do not use such as lubricants and organic solvents to clean the connectors.
- Do not clean modules under the weather conditions of wind more than 4 class (in Beaufort scale), heavy rain or heavy snow.
- When cleaning the modules, it is forbidden to step on the modules, forbidden the injection of water to the backside of the modules or cables. Please ensure that the connectors are clean and dry to prevent electric shock and fire hazards.
- Do not use steam cleaner.

5.3.2 Cleaning Methods

Methods A: Compressed water

Requirement for water quality:

①PH:6~8; ②Water hardness-Calcium carbonate concentration : ≤ 600 mg/L; ③Recommend to use soft water to wash; ④The recommended maximum water pressure is 4MPa (40 bar).

Method B: Compressed air

Ulica Solar recommends using this method to clean the soft dirt (like dust) on modules. This technique can be applied as long as the method is efficient enough to clean the modules considering the on-site conditions.

Method C: Wet cleaning

- If excessive soiling is present on the module surface, a non-conductive brush, sponge, or other mild agitating method may be used with caution.

- Please make sure that any brushes or agitating tools are constructed with non-conductive materials to minimize risk of electric shock and that they are not abrasive to the glass or the aluminum frame.
- If grease is present, an environmentally friendly cleaning agent may be used with caution.

Method D: Cleaning robot

If a cleaning robot is used for dry cleaning, the brush material is required to be soft plastic material, and the glass surface and aluminum alloy frame of the module will not be scratched during the cleaning process and after cleaning. The weight of the cleaning robot should not be too large. If the cleaning robot is improperly used, and the resulting module damage and power attenuation are not covered by Ulica Solar's warranty.

5.4 Weeding

- This manual contains recommendations for weeding operation and maintenance of photovoltaic power station. The following measures can be taken to a certain extent to avoid and prevent the problem of module damage caused by stone splashing during weeding. System users and professional operation and maintenance personnel should read carefully. Ulica Solar warranty will be invalid if the module or glass is damaged by any external force.
- When the height of the vegetation does not affect the normal operation and maintenance of the module, you can choose not to do weeding.
- The use of scythe manually instead of weeding machine weeding, or the use of professional weeding equipment with protective devices can reduce the probability of stone splash to a certain extent.

5.5 Trouble Shooting

- If your PV system does not work normally after installation, please inform your installer immediately. It is recommended to perform preventive inspections every six months, and do not change the components of the modules without authorization.
- If electrical or mechanical performance inspection or maintenance is required, they should be operated by qualified professionals to avoid any electric shock or personal injury.

6 Reporting Technical Issues and Claims

- Contact your installer.
- Please connect Ulica Solar's customer service team at sales@ulsolar.com.cn.
- For module specifications or datasheets, please download from: <http://www.ulicasolar.com>.

PANNELLO SOLARE Ulica Solar

Modello: UL-585M-144ADGN (Codice Konelco: 34.5000.18 – 585W)

ITA – LIMITAZIONI D'USO

- ☐ Altitudine massima di utilizzo per cui il modulo fotovoltaico è progettato: ≤ 2000 m.
- ☐ Non idoneo ad essere utilizzato in luoghi in cui potrebbe essere presente gas infiammabile.
- ☐ Non idoneo ad essere utilizzato in luoghi in cui potrebbe essere presente atmosfera con ammoniaca.

EN – LIMITATIONS OF USE

- ☐ Maximum use altitude for which the photovoltaic module is designed: ≤ 2000 m.
- ☐ Not suitable for use in places where flammable gas may be present.
- ☐ Not suitable for use in places where an ammonia atmosphere may be present.

ITA – AVVERTENZE E ISTRUZIONI DI SICUREZZA

ATTENZIONE

AVVERTENZE GENERALI

- ☐ Tutte le istruzioni devono essere lette e comprese prima di tentare di installare, cablare, utilizzare e mantenere il modulo.
- ☐ Una volta che il modulo fotovoltaico è stato spedito al luogo di installazione, tutte le parti devono essere disimballate correttamente e con cura.
- ☐ Durante il trasporto dei moduli, cercare di ridurre al minimo gli urti o le vibrazioni sul modulo, poiché ciò potrebbe danneggiare il modulo o causare microfratture nelle celle.
- ☐ Durante tutte le situazioni di trasporto, non far mai cadere il modulo da un veicolo, da una casa o dalle mani. Ciò danneggerà il modulo.
- ☐ Non sollevare i moduli fotovoltaici utilizzando i cavi collegati o la scatola di giunzione.
- ☐ Non trasportare un modulo sulla testa, con il pannello posteriore rivolto verso il casco, se non è evitabile, assicurarsi che il modulo sia rivolto con il lato in vetro verso il casco.
- ☐ Non stare in piedi o calpestare il modulo fotovoltaico. Ciò è proibito e sussiste il rischio di danneggiare il modulo e causare lesioni personali.
- ☐ Solo i moduli con lo stesso tipo e capacità devono essere collegati in serie all'interno della stringa.

- I moduli fotovoltaici generano energia elettrica CC quando esposti alla luce solare o ad altre fonti luminose. Le parti attive del modulo come i terminali possono provocare ustioni, scintille e shock elettrici letali.
- Non toccare i terminali sotto tensione a mani nude. Utilizzare strumenti isolati per i collegamenti elettrici.
- Tutti gli impianti fotovoltaici devono essere collegati a terra. Se non esiste una regolamentazione speciale, seguire il Codice Elettrico Nazionale o altro codice nazionale.
- In condizioni normali, può accadere che un modulo fotovoltaico subisca condizioni che producono più corrente e/o tensione rispetto a quelle dichiarate nelle condizioni di test standard. Di conseguenza, i valori di **Isc** e **Voc** contrassegnati sul modulo, quando si determinano i valori nominali di tensione dei componenti del sistema fotovoltaico, i valori nominali di corrente del conduttore, le dimensioni dei fusibili e le dimensioni dei controlli collegati all'uscita fotovoltaica, devono essere moltiplicati per 1,25.
- La luce solare concentrata artificialmente non deve essere diretta sul modulo o sul pannello.
- Il vetro anteriore viene utilizzato a protezione del modulo solare. Il vetro rotto rappresenta un pericolo per la sicurezza elettrica (può provocare scosse elettriche o incendi). In questo caso il modulo non può essere riparato e deve essere sostituito immediatamente.
- Per ridurre il rischio di scosse elettriche o ustioni, i moduli possono essere coperti con un materiale opaco durante l'installazione per evitare lesioni.
- Il lavoro di installazione del sistema fotovoltaico può essere eseguito solo sotto la protezione di coperture solari o ombrelloni e solo una persona qualificata può installare o eseguire lavori di manutenzione su questi moduli.
- Non scollegare i moduli dal circuito, quando sono in funzione nel sistema e generano carica elettrica.
- Seguire le raccomandazioni del produttore della batteria se le batterie vengono utilizzate con i moduli.
- Non utilizzare questo modulo per sostituire o sostituire parzialmente tetti e pareti di edifici abitativi.
- Non installare i moduli in luoghi in cui potrebbe essere presente gas infiammabile.
- Non rimuovere alcuna parte installata né smontare il modulo.
- Non pulire il vetro con prodotti chimici. Utilizzare solo acqua del rubinetto. Assicurarsi che la temperatura della superficie del modulo sia fresca al tatto. La pulizia dei moduli con acqua fredda quando la temperatura superficiale del modulo è elevata può provocare la rottura del vetro.
- Osservando i moduli fotovoltaici con tecnologia di rivestimento antiriflesso (AR), sarà normale vedere alcune celle con una leggera differenza di colore da diverse angolazioni. I moduli con LRF (pellicola riflettente la luce) e senza LRF non devono essere utilizzati nello stesso sistema o tetto.
- Il connettore della scatola di giunzione non deve entrare in contatto con sostanze oleose, ad esempio lubrificanti, antiruggine, ecc.

L'irraggiamento massimo è di 1300W/m² per il modulo con retro trasparente e bianco.

ATTENZIONE

AVVERTENZE PER L'INSTALLAZIONE

□ Indossare sempre i dispositivi di protezione individuale quali per esempio: un casco protettivo, guanti isolanti e scarpe antinfortunistiche (con suole di gomma).

□ Conservare il modulo fotovoltaico imballato nel cartone fino all'installazione.

Installate i moduli fotovoltaici fissandoli a strutture di sostegno sufficientemente robuste da sopportare eventi atmosferici anche di importante entità.

□ Non toccare inutilmente il modulo fotovoltaico durante l'installazione. La superficie del vetro e la cornice potrebbero essere calde. Sussiste il rischio di ustioni e scosse elettriche.

□ Non lavorare in caso di pioggia, neve o vento.

□ A causa del rischio di scosse elettriche, non eseguire alcun lavoro se i terminali del modulo fotovoltaico sono bagnati.

□ Utilizzare strumenti isolati e non utilizzare strumenti bagnati.

□ Durante l'installazione dei moduli FV, non lasciar cadere alcun oggetto (ad esempio moduli FV o strumenti).

□ Assicurarsi che non vengano generati o siano presenti gas infiammabili vicino al luogo di installazione.

□ Inserire i connettori del modulo completamente e correttamente. Si dovrebbe sentire un "clic" udibile. Questo suono conferma che i connettori sono completamente inseriti. Controlla tutte le connessioni.

□ I cavi del modulo devono essere fissati saldamente al telaio del modulo, la gestione dei cavi deve essere eseguita in modo da evitare che il connettore graffi o colpisca il pannello posteriore del modulo.

□ Non toccare la scatola di giunzione e l'estremità dei cavi di interconnessione (connettori) a mani nude durante l'installazione o sotto la luce solare, indipendentemente dal fatto che il modulo fotovoltaico sia collegato o disconnesso dal sistema.

□ Non esporre il modulo fotovoltaico a carichi eccessivi sulla superficie del modulo fotovoltaico né torcere il telaio.

□ Non colpire o applicare un carico eccessivo sul vetro o sul pannello posteriore, ciò potrebbe rompere le celle o causare microfratture.

□ Durante l'installazione o il funzionamento, non utilizzare strumenti affilati per pulire il pannello posteriore e il vetro. Sul modulo possono apparire dei graffi.

□ Non praticare fori nel telaio. Potrebbe causare la corrosione del telaio.

□ Quando si installano i moduli su strutture montate sul tetto, provare a seguire il principio "dall'alto verso il basso" e/o "da sinistra a destra" e non calpestare il modulo. Ciò danneggerebbe il modulo e sarebbe pericoloso per la sicurezza personale

Istruzioni di installazione consultabili sul sito "www.gbconline.it".

ENG – WARNINGS AND SAFETY INSTRUCTIONS

ATTENTION

GENERAL WARNINGS

- *All instructions must be read and understood before attempting to install, wire, operate and maintain the module.*
- *Once the photovoltaic module has been shipped to the installation site, all parts must be unpacked correctly and carefully.*
- *When transporting the modules, try to minimize shock or vibration on the module, as this may damage the module or cause microcracks in the cells.*
- *During all transportation situations, never drop the module from a vehicle, house, or out of your hands. This will damage the module.*
- *Do not lift the photovoltaic modules using the connected cables or the junction box.*
- *Do not carry a module on your head, with the back panel facing the helmet, if unavoidable, ensure the module is facing with the glass side towards the helmet.*
- *Do not stand or step on the photovoltaic module. This is prohibited and there is a risk of damaging the module and causing personal injury.*
- *Only modules with the same type and capacity must be connected in series within the string.*
- *Photovoltaic modules generate DC electricity when exposed to sunlight or other light sources. Active parts of the module such as terminals can cause fatal burns, sparks and electric shocks.*
- *Do not touch live terminals with bare hands. Use insulated tools for electrical connections.*
- *All photovoltaic systems must be earthed. If there is no special regulation, follow the National Electrical Code or other national code.*
- *Under normal conditions, it may happen that a photovoltaic module experiences conditions that produce more current and/or voltage than those declared in the standard test conditions. Accordingly, the values of I_{sc} and V_{oc} marked on the module, when determining the voltage ratings of the components of the PV system, the current ratings of the conductor, the sizes of the fuses and the sizes of the controls connected to the PV output, must be multiplied by 1.25.*
- *Artificially concentrated sunlight should not be directed onto the module or panel.*
- *The front glass is used to protect the solar module. Broken glass poses an electrical safety hazard (may cause electric shock or fire). In this case the module cannot be repaired and must be replaced immediately.*
- *To reduce the risk of electric shock or burns, modules may be covered with an opaque material during installation to prevent injury.*
- *Photovoltaic system installation work can only be carried out under the protection of solar covers or umbrellas, and only a qualified person can install or carry out maintenance work on these modules.*
- *Do not disconnect modules from the circuit when they are operating in the system and generating electrical charge.*
- *Follow the battery manufacturer's recommendations if batteries are used with modules.*

- *Do not use this module to replace or partially replace roofs and walls of residential buildings.*
- *Do not install the modules in places where flammable gas may be present.*
- *Do not remove any installed parts or disassemble the module.*
- *Do not clean the glass with chemicals. Use only tap water. Make sure the surface temperature of the module is cool to the touch. Cleaning the modules with cold water when the surface temperature of the module is high may cause the glass to break.*
- *When looking at photovoltaic modules with anti-reflection (AR) coating technology, it will be normal to see some cells with a slight color difference from different angles. Modules with LRF (light reflective film) and without LRF must not be used in the same system or roof.*
- *The junction box connector should not come into contact with oily substances, such as lubricants, rust inhibitors, etc.*

The maximum irradiance is 1300W/m² for the module with a transparent and white back.

ATTENTION

INSTALLATION WARNINGS

- Always wear personal protective equipment such as: a protective helmet, insulating gloves and safety shoes (with rubber soles).

- Keep the photovoltaic module packed in the carton until installation.

Install the photovoltaic modules by fixing them to support structures that are robust enough to withstand even major atmospheric events.

- Do not touch the photovoltaic module unnecessarily during installation. The glass surface and frame may be hot. There is a risk of burns and electric shock.
- Do not work in rain, snow or wind.
- Due to the risk of electric shock, do not carry out any work if the PV module terminals are wet.
- Use insulated tools and do not use wet tools.
- When installing the PV modules, do not drop any objects (e.g. PV modules or tools).
- Make sure that no flammable gases are generated or present near the installation site.
- Insert the module connectors completely and correctly. You should hear an audible "click". This sound confirms that the connectors are fully inserted. Check all connections.
- The module cables must be securely attached to the module chassis, cable management must be done in a way that prevents the connector from scratching or hitting the rear panel of the module.
- Do not touch the junction box and the end of the interconnection wires (connectors) with bare hands during installation or under sunlight, regardless of whether the PV module is connected or disconnected from the system.

- Do not expose the PV module to excessive loads on the PV module surface or twist the frame.
- Do not hit or apply excessive load to the glass or back panel, this may break the cells or cause microcracks.
- During installation or operation, do not use sharp tools to clean the back panel and glass. Scratches may appear on the module.
- Do not drill holes in the frame. It may cause corrosion of the frame.
- When installing modules on roof-mounted structures, try to follow the "top to bottom" and/or "left to right" principle and do not step on the module. This would damage the module and be dangerous to personal safety

Installation instructions available on the website “www.gbconline.it”.

FABBRICATO DA: / MANUFACTURED BY: NINGBO ULICA SOLAR CO., LTD

No: 238 Middle Yunlin Road, Haishu District,
Ningbo, 315177 - CHINA

IMPORTATO DA: / IMPORTED BY: Kon.El.Co S.p.A

Viale Valtellina n. 33,
20092 Cinisello Balsamo – MI - ITALY

Istruzioni di installazione consultabili sul sito www.gbconline.it / Installation instructions available on the website “www.gbconline.it”.

Obblighi di informazione. Le informazioni sullo smaltimento sono fornite sul sito www.gbconline.it / *Information obligations. Information on disposal is provided on the website www.gbconline.it*

Made in China

