

LUZ DE TRABAJO TRÍPODE COMPACTA, RECARGABLE

CON IMÁN Y POWERBANK

Características de Producto


- Diseño compacto con trípode/asa de transporte y función magnética para múltiples usos
- Puerto de carga USB-C y batería externa USB-A
- Modos de potencia alta, media y baja con interruptor de encendido resistente a la intemperie
- Cuerpo reforzado de ABS IK07 con borde de goma para mayor protección



CAT NO.	LUMINARIA (LÚMENES)	TIEMPO DE CARGA
LWR10G65	1000	5-6 Horas



Esquema del Producto

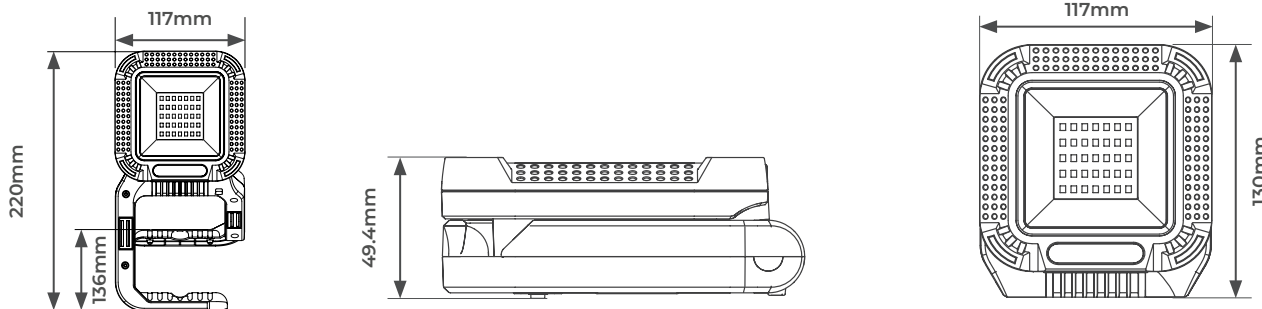

CAT NO.	PESO (Kg)	POTENCIA	CRI	RATIO IK	TIPO DE BATERÍA	CAPACIDAD BATERÍA	RANGO TEMP (°C)	TEMP AMBIENTE VÚTIL (°C)
LWR10G65	0.41	9.5W	≥80	IK07	3.7V Li-ion	4000mA	20° hasta 40°	25

NORMATIVA	DESCRIPCIÓN
60598-1	Luminaires – General requirements
60598-2-4	Luminaires – Portable general purpose luminaires
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

