

SENSO SELF-ADHESIVE

Installed quickly & easily!



Self-adhesive collection

Installation on smooth surface



Quick & Easy Installation

No glue, no joints, no spacers
Can be cut with a utility knife
Dust-free



Suitable for wet rooms



Scan and discover
INTERIOR
DESIGNER

SENSO RUSTIC



0394 - White Pecan


- 1-White Pecan**
AS: Size: 91.4 × 15.2 cm
Code: 3325 0394 - EAN: 3475710304651
- 2-Kola**
AS: Size: 91.4 × 15.2 cm
Code: 3325 0309 - EAN: 3475710247538
- 3-Imperial Pearl**
AS: Size: 91.4 × 15.2 cm
Code: 3325 1014 - EAN: 3475710602320
- 4-Pecan**
BD: Size: 91.4 × 15.2 cm
Code: 3327 0511 - EAN: 3475710250385
- 5-Muscade**
BD: Size: 91.4 × 15.2 cm
Code: 3327 0306 - EAN: 3475710250408
- 6-Noisette**
BD: Size: 91.4 × 15.2 cm
Code: 3327 0311 - EAN: 3475710250392
- 7-Cleveland Dark**
AS: Size: 91.4 × 15.2 cm
Code: 3325 0728 - EAN: 3475710606106

SENSO NATURAL



0577 - Authentic Nature

- 1-Sunny Light**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0996
EAN: 3475710551550
- 2-Columbia**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0347
EAN: 3475710391088
- 3-Noyer Naturel**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0018
EAN: 3475710235238
- 4-Authentic Nature**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0577
EAN: 3475710602122
- 5-Travertin**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0201
EAN: 3475710320385
- 6-Night Slate**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0397
EAN: 3475710319419

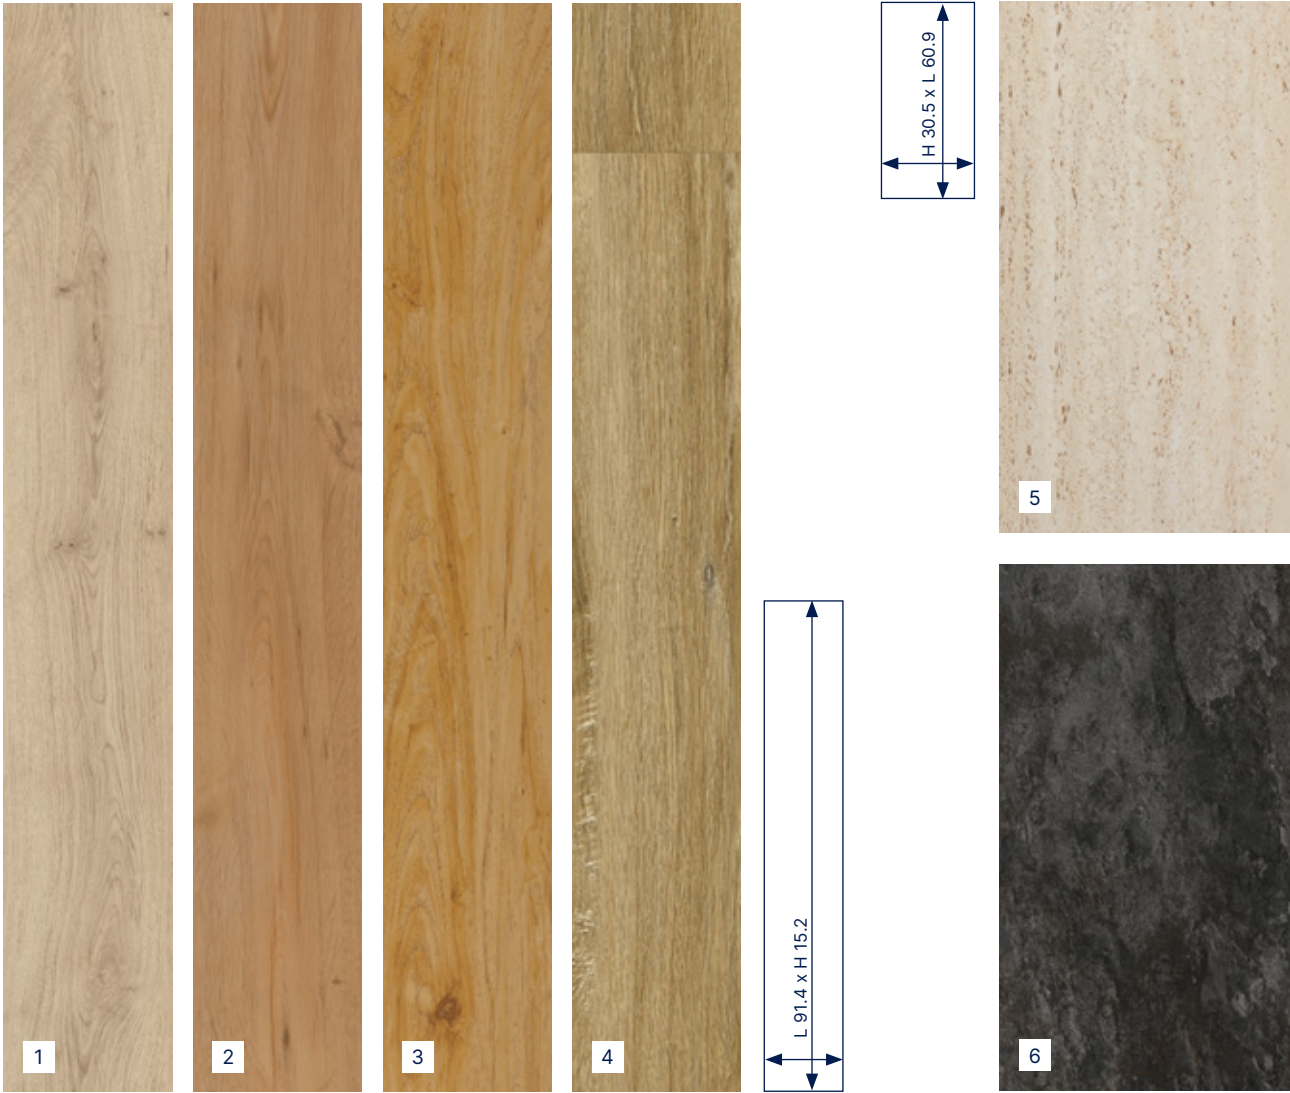



0301 - Ceruse Blanc



0702 - Wallstreet Light

1-Ceruse Blanc
VS: Size: 91.4 x 15.2 cm
Code: 3326 0301 - EAN: 3475710247897

2-Wallstreet Light
Size: 30.5 x 60.9 cm
Code: 3375 0702 - EAN: 3475710391095

Technical Characteristics

			PLANKS	TILES
Description				
Total thickness	EN ISO 24346	mm	2.00	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.20	0.20
Weight: mass per unit area	EN ISO 23997	g/sqm	3920	3425
Size	EN ISO 24342	cm	planks: 91.4 x 15.2	tiles: 30.5 x 60.9
Number of planks / tiles and sqm per box	-	planks / tiles	16 planks / 2.20 sqm	12 tiles / 2.22 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical probersity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+
CE Marking				
CE	EN 14041			

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



Primer Performance



6x1 kg
0572 0001
EAN: 3475710223839

4x3 kg
0571 0001
EAN: 3475710216718

- Effective and long-lasting adhesion on all adhesive products
- Reduces porosity, improves the adhesion of adhesive tiles & planks, blocks dust and grease from the surface
- Easy to apply: with a roller
- No odour: without solvents