


# Ficha tecnica

Revisado  
06/10/2020

## TACO GOLPEO Ø5x30

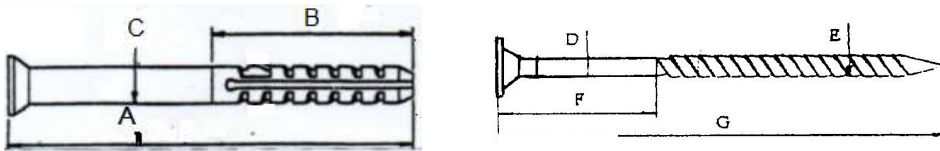

Medidas	A ±0.1	B ±0.1	C ±0.1	Screw Size	D +_0.1	E ±_0.05	F+_2	G±2
5X30	30	25	4.9	3.5X33	3.2	3.4	10	33

MEDIDA	Características [kN] / resistencia [kN]							
	Hormigon C12/15 (use category A)	Hormigon C16/20 ÷ C50/60 (use category A)	Ladrillo MZ (use category B)	Ladrillo de silicato de calcio KS (use category B)	Ladrillo hueco KSL (use category C)	bloque ligero de hormigon LAC (use category D)	Autoclaved concrete blocks AAC 2 (use category E)	Autoclaved concrete blocks AAC 7 (use category E)
Ø5X30	0,20/0,10	0,30/0,15	0,30/0,15	0,30/0,15	0,25/0,12	0,10/0,05	-	-

Coefficiente de seguridad=2

TECHNICAL PARAMETERS		
Parameter	Unit	Value
		Ø5x
diametro	$d_k$ [mm]	5
diametro perforacion	$d_o$ [mm]	5
Effective anchorage depth	$h_{ef}$ [mm]	25
Profundidad de taladro	$h_o$ [mm]	35
Huella tipo	[-]	PZ-2
material	[-]	PA6
material tornillo	[-]	Acero zincado

PARAMETROS DE INTALACION			
Plug type	Min. Espesor material	Distancia min. al borde	Distancia min. entre tacos
	$h_{min}$ [mm]	$C_{min}$ [mm]	$L_{os}$ [mm]
Ø5X30	100	100	100

