

ECO CLIMATE SPEED FIT



Características de Producto

- Diseñado para instalación de superficie en entornos industriales, comerciales y cualquier otro con necesidades de luminaria lineal estanca.
- Difusor Opal para mayor uniformidad y confort visual.
- Fabricación de policarbonato, con Conector Estanco M20 In-Line IP68 en ambos extremos.
- Luminaria con posibilidad de Conexión Continua.





Detalle Conector In-Line IP68



	CAT NO.	TEMP. COLOR (K)	DRIVER	LUMINARIA (LÚMENES)	POTENCIA (W)	EFICIENCIA (Lm/W)
PANTALLA SIMPLE	ECLS6G14S40	4000	Estándar	1440	12	120
	ECLS12G28S40	4000	Estándar	2880	24	120
	ECLS15G40S40	4000	Estándar	3960	33	120
	ECLS6G14S50	5000	Estándar	1440	12	120
	ECLS12G28S50	5000	Estándar	2880	24	120
	ECLS15G40S50	5000	Estándar	3960	33	120
PANTALLA DOBLE	ECLS6G25S40	4000	Estándar	2520	21	120
	ECLS12G48S40	4000	Estándar	4800	40	120
	ECLS15G66S40	4000	Estándar	6600	55	120
	ECLS15G78S40	4000	Estándar	7800	65	120
	ECLS6G25S50	5000	Estándar	2520	21	120
	ECLS12G48S50	5000	Estándar	4800	40	120
	ECLS15G66S50	5000	Estándar	6600	55	120
	ECLS15G78S50	5000	Estándar	7800	65	120

Dimensiones

Pantalla Simple y doble

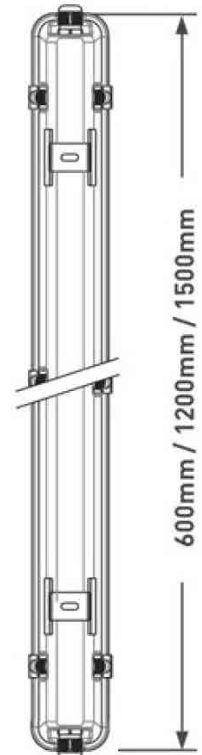

CAT NO.	PESO (kg)	CRI	FECUENCIA (Hz)	RATIO IK	RANGO TEMP. (°C)	VIDA ÚTIL FACTOR L/B	MAX. CC
ECLS6G14S40	0.68	>80	50	IK08	-20 +45	L70 /B50	40
ECLS12G28S40	1.28	>80	50	IK08	-20 +45	L70 /B50	35
ECLS15G40S40	1.67	>80	50	IK08	-20 +45	L70 /B50	25
ECLS6G14S50	0.68	>80	50	IK08	-20 +45	L70 /B50	40
ECLS12G28S50	1.28	>80	50	IK08	-20 +45	L70 /B50	35
ECLS15G40S50	1.67	>80	50	IK08	-20 +45	L70 /B50	25
ECLS6G25S40	0.68	>80	50	IK08	-20 +45	L70 /B50	20
ECLS12G48S40	1.28	>80	50	IK08	-20 +45	L70 /B50	20
ECLS15G66S40	1.67	>80	50	IK08	-20 +45	L70 /B50	15
ECLS15G78S40	1.67	>80	50	IK08	-20 +45	L70 /B50	10
ECLS6G25S50	0.68	>80	50	IK08	-20 +45	L70 /B50	20
ECLS12G48S50	1.28	>80	50	IK08	-20 +45	L70 /B50	20
ECLS15G66S50	1.67	>80	50	IK08	-20 +45	L70 /B50	15
ECLS15G78S50	1.67	>80	50	IK08	-20 +45	L70 /B50	10

NORMATIVA	DESCRIPCIÓN
EN 60598-1	Luminaire – General requirements
EN 60598-2-1	Luminaire - Fixed general purpose
EN 60598-2-22	Luminaire - Emergency
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

LUCECO

 Esta luminaria lleva lámparas LED incorporadas.

A++
A+
A
B
C
D
E

} LED

Las lámparas de esta luminaria no son recambiables.

874/2012 

