



SP50RPB

SP50RPN




X1




X1



X1

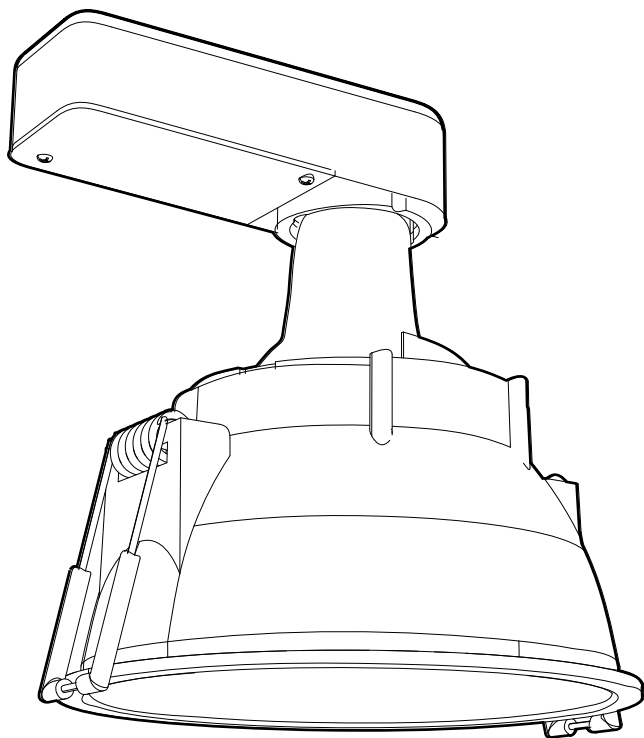

345lm



+



320lm

LED

2700K
CCT

IP20

230V ~
50Hz

36°

4W
CONS

15000h

x50.000
ON / OFF

PF>0,5

GU10

Ta

min -20°C
max 40°C

A

1

Min.
120mm

Min.
70mm

Min.
500mm


2




Ø90mm




3




(C)

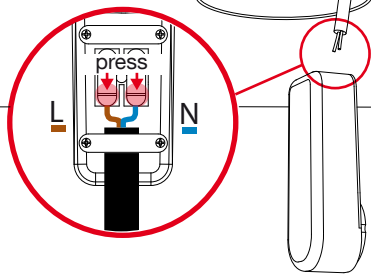


(D)





H03VV - 2x0.75mm²
(requis/recommended)



4

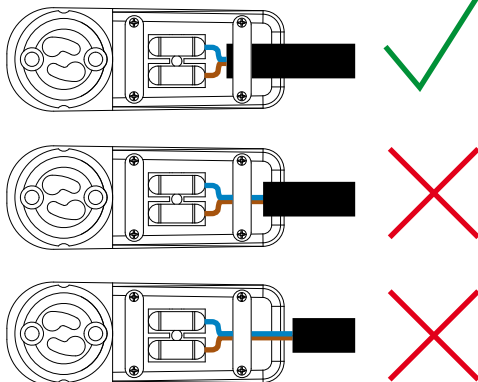

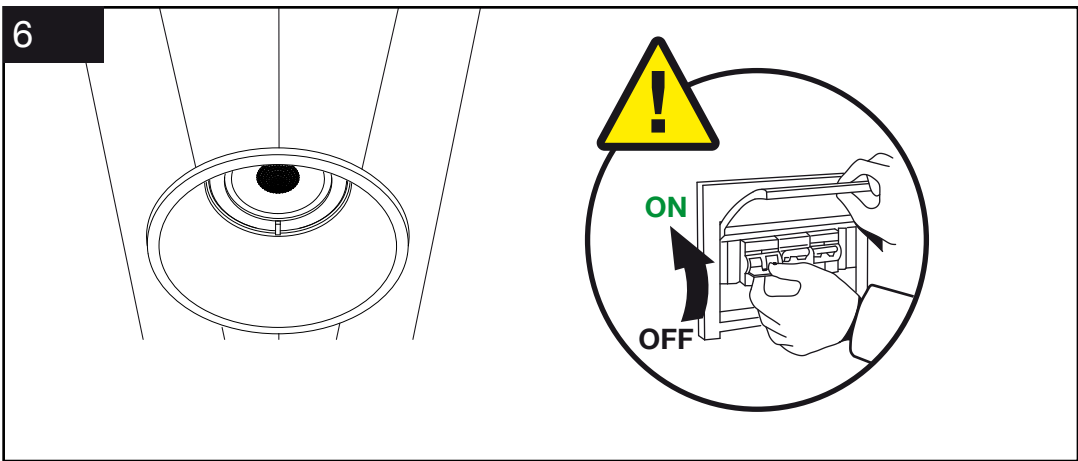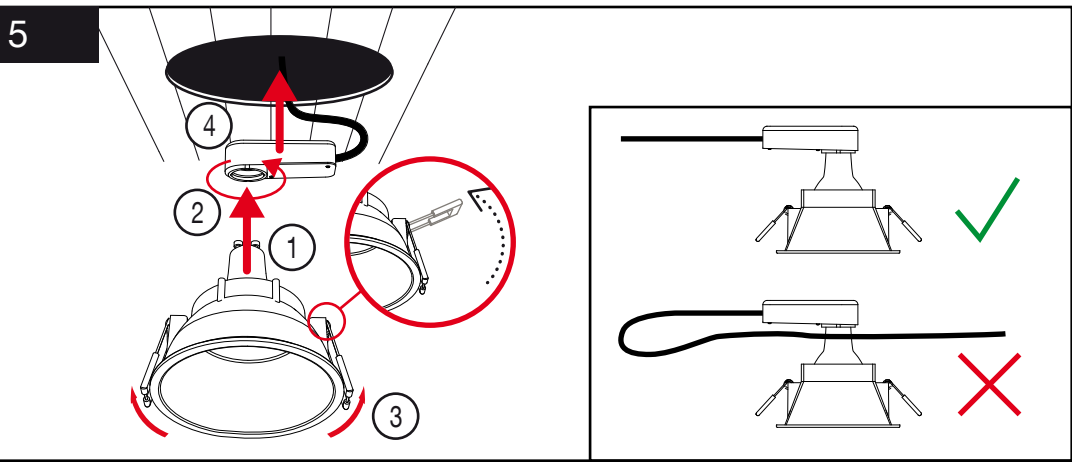

B

