VEVOR

Upgrade · The Home Creator Way

Sliding Door Track


MODEL: XC39SF-5FT

Video of installation

VEVOR
Upgrade·The Home Creator Way

Sliding Door Track

MODEL: XC39SF-5FT

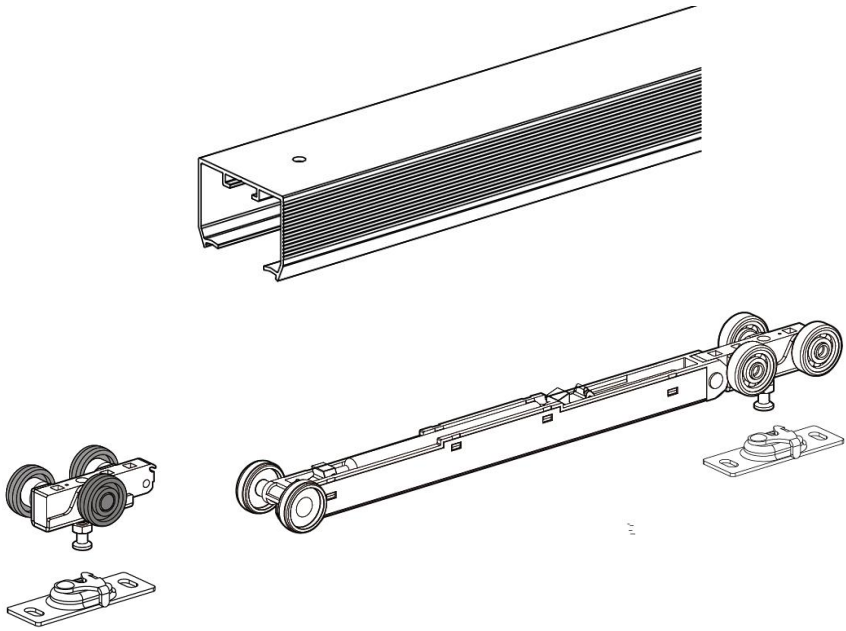

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

INSTRUCTIONS

Thank you very much for choosing this Sliding Door Track**.**

- Please read all of the instructions before using it. The information will help you achieve the best possible results.

The products carried in this catalog may be different in color than the actual item.

SAVE THESE INSTRUCTIONS

WARNING:

Ensure Health and Safety, local authority and general workshop practice regulations are adhered to when using tools.

***** DO NOT use tools if damaged.

***** Maintain tools in good and clean condition for best and safest performance.

***** Wear suitable clothing to avoid snagging. Do not wear loose jewellery and tie back long hair.

***** Account for all tools and parts being used.

***** If working off the vehicle, ensure that the workplace is secure and stable.

***** Do Not use these tools if you are tired or under the influence of alcohol, drugs or intoxicating medication.

***** PERSONAL SAFE TY WARNING!

Always Wear personal protective equipment.

*PERSONA L PROTECTIVE EQUIPMENT

1. Always wear impact safety goggles that provide front and side protection for the eyes. Eye protection equipment should comply with CSA Z94.3-07 or ANSI Z87.1 standards based on the type of work performed.
2. Wear gloves that provide protection based on the work materials or to reduce the effects of tool vibration.

CE

Conforms to relevant EU regulatory (CPR)305/2011 requirements.


Technical Parameters and Parts List

Technical Parameters	
Name	Sliding Door Track
Model	XC39SF-5FT
Track Classification	Single Track
Sliding Door Specification	5ft (Single Track, Single Set)
Track Dimensions	56.73"(1441mm)
Soft Close	Yes
Load Capacity	88LBS(40kg)
Appearance Color	Silver

(XC39SF-5FT) Parts List			
Name	Specification	Qty (pcs)	Notes
Track	/	1	Single
User Manual	/	1	
Hanger(Wheel Assembly)	/	1	With Soft Close
	/	1	Without Soft Close
Trigger	/	2	Supplied Installation Screws
Floor guide	/	2	
Bumper	/	1	
Wrench	/	1	
Allen wrench	/	1	
Wall-mounting Screws	/	9	8 for actual use, 1 extra from manufacturer
Hanger Wheel Screws	/	5	4 for actual use, 1 extra from manufacturer
Anti-Sway Device Screws	/	3	2 for actual use, 1 extra from manufacturer
Door Stop Screws	/	2	1 for actual use, 1 extra from manufacturer


Installation Manual

TOOLS REQUIRED

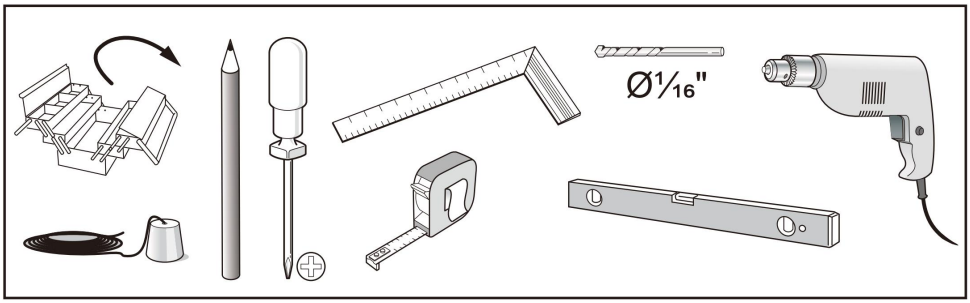

HARDWARE INCLUDED

1 Track




(x1)



ST4.2x32 (×8)

2

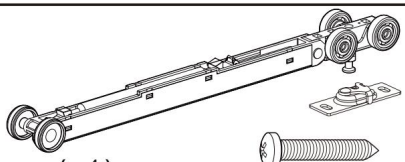


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Installation

1 **CONSTRUCT ROUGH OPENING**


1. Header must be SQUARE and PLUMB with tube and LEVEL.
2. Minimum Height is door height plus 3 ¼"(83MM).
3. Width is 2 X Door width plus 1"(25MM).
4. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
5. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

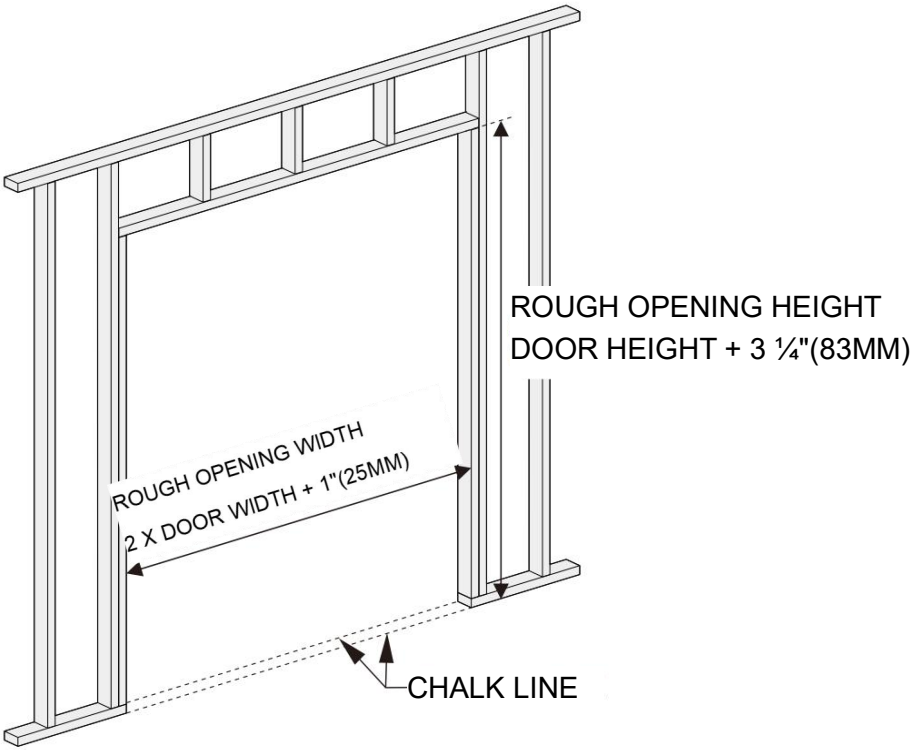

Installation


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

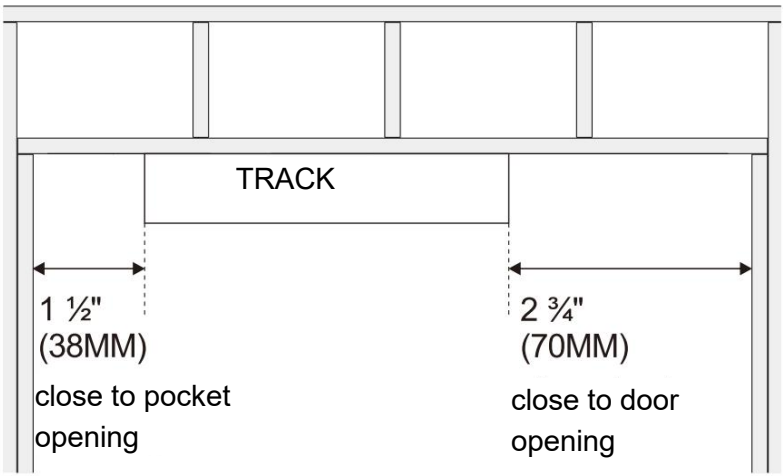

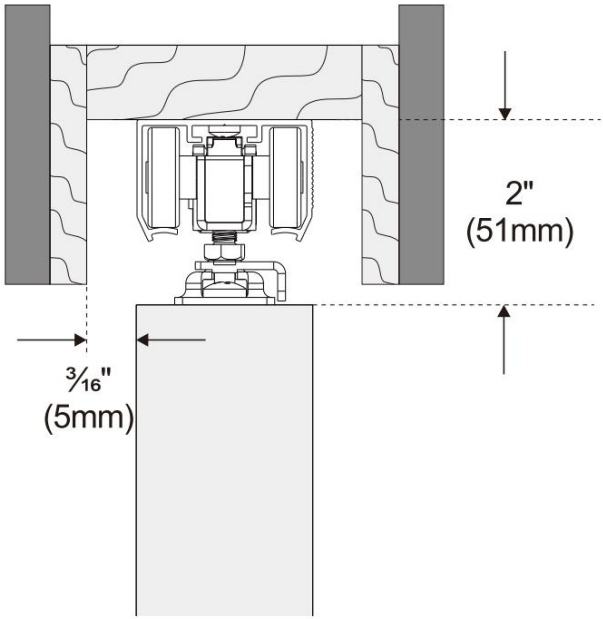


Installation

4 Using a pencil to mark the holes on the wall.

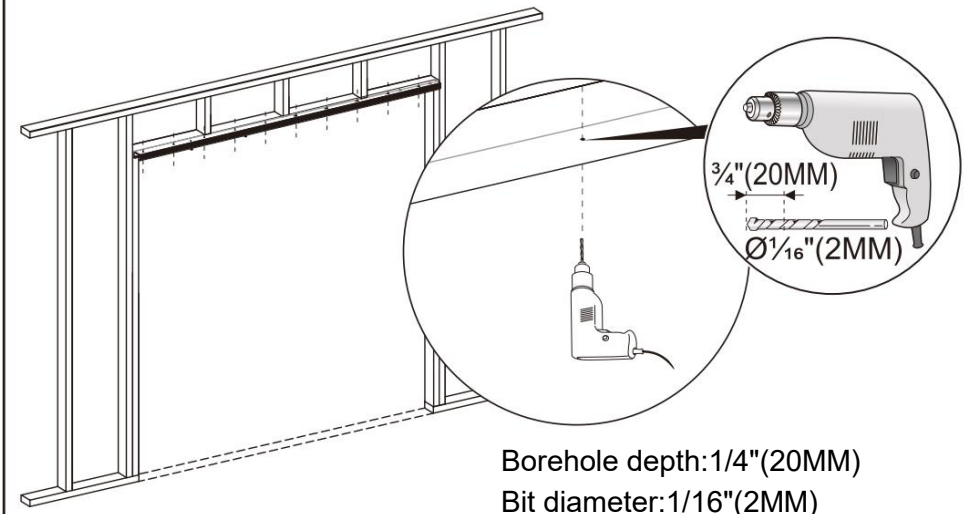


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

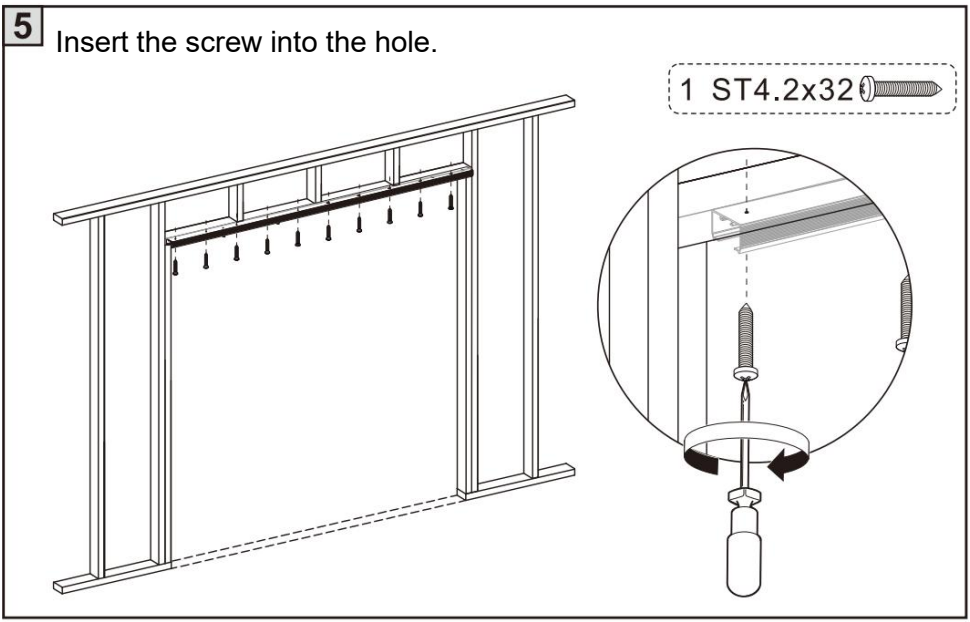

Installation


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

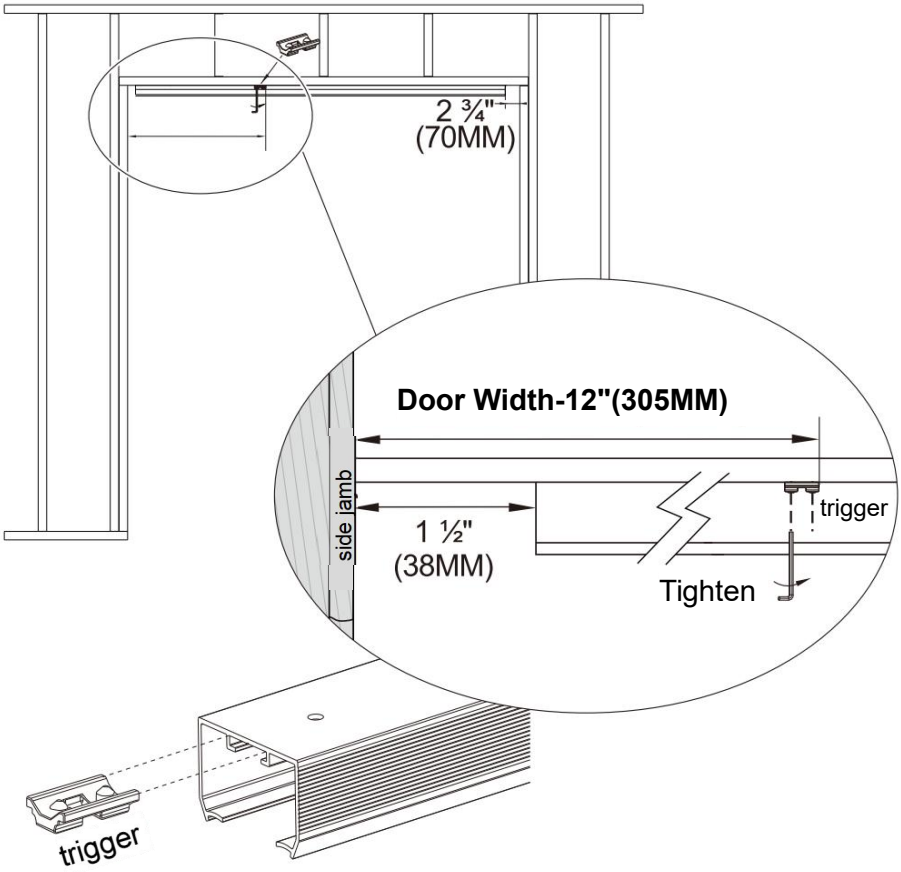

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installation


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

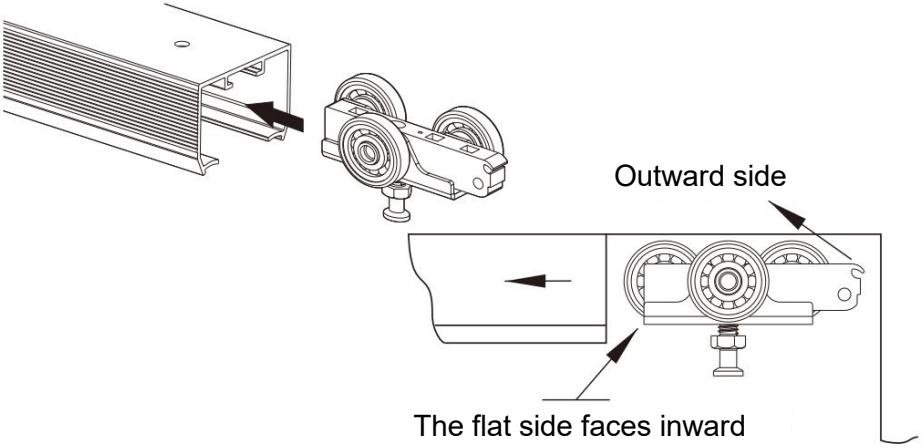

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

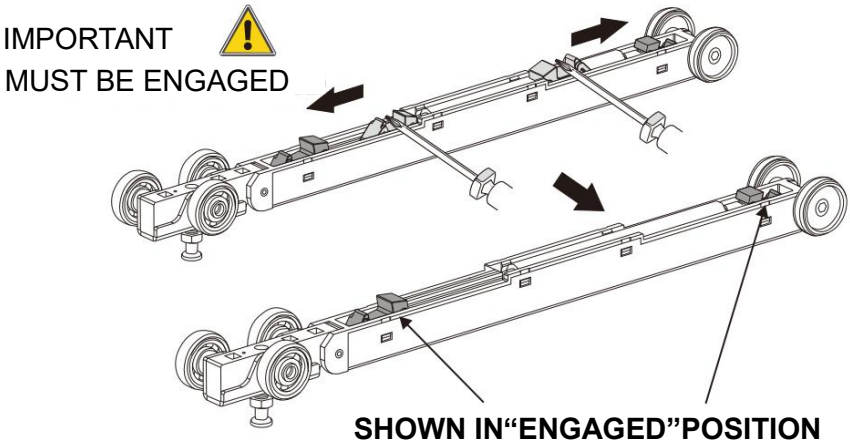


Installation

9

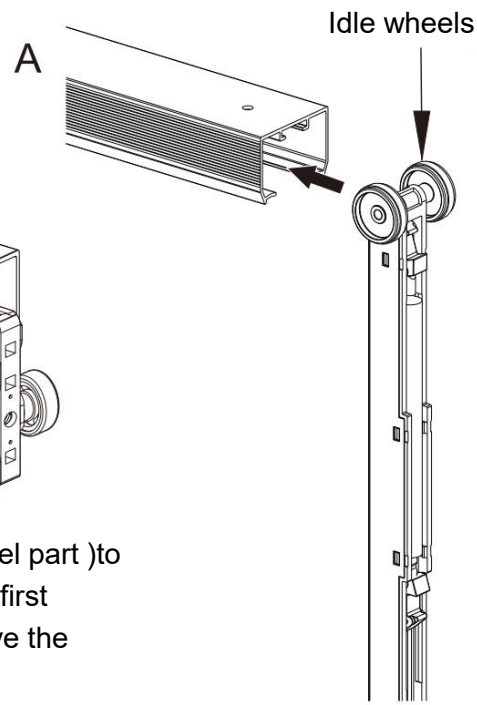

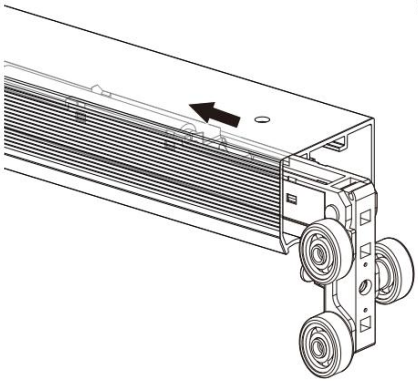


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

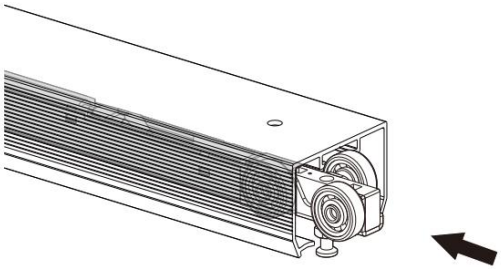





Installation

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

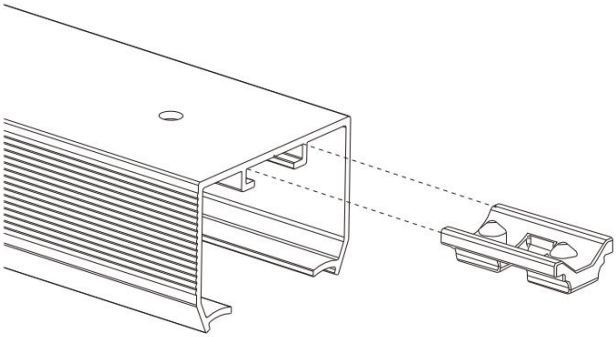

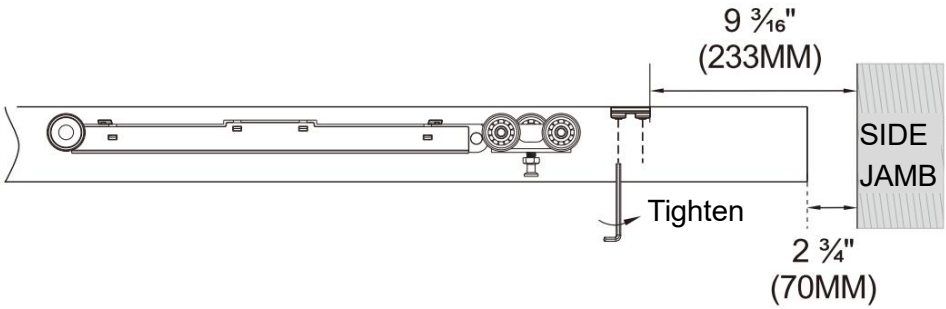




Installation

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

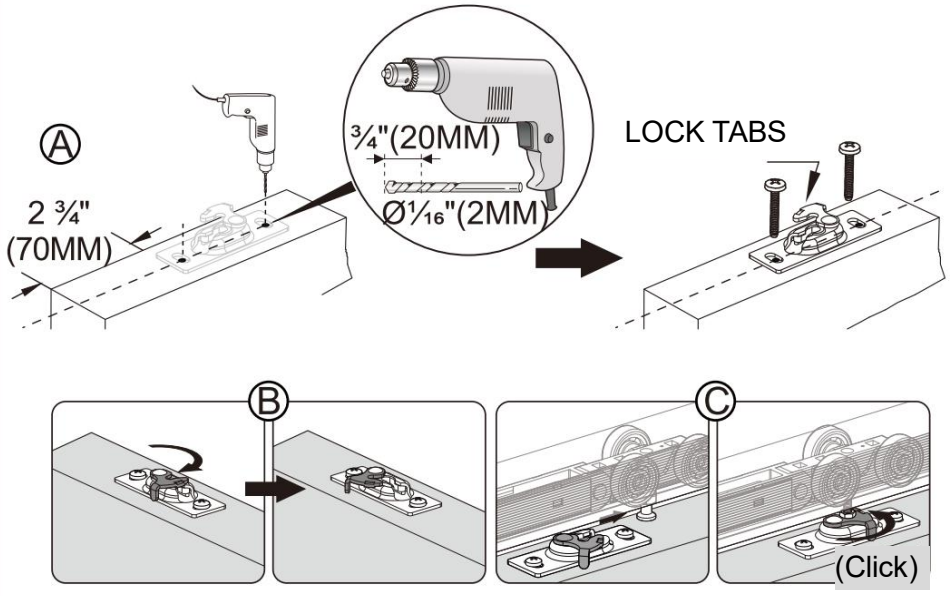

Use spanner to adjust door height.


Installation

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

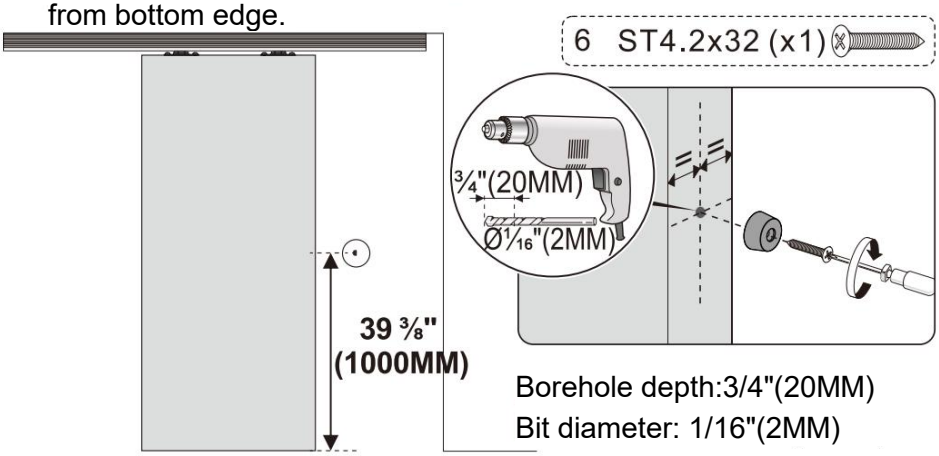

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

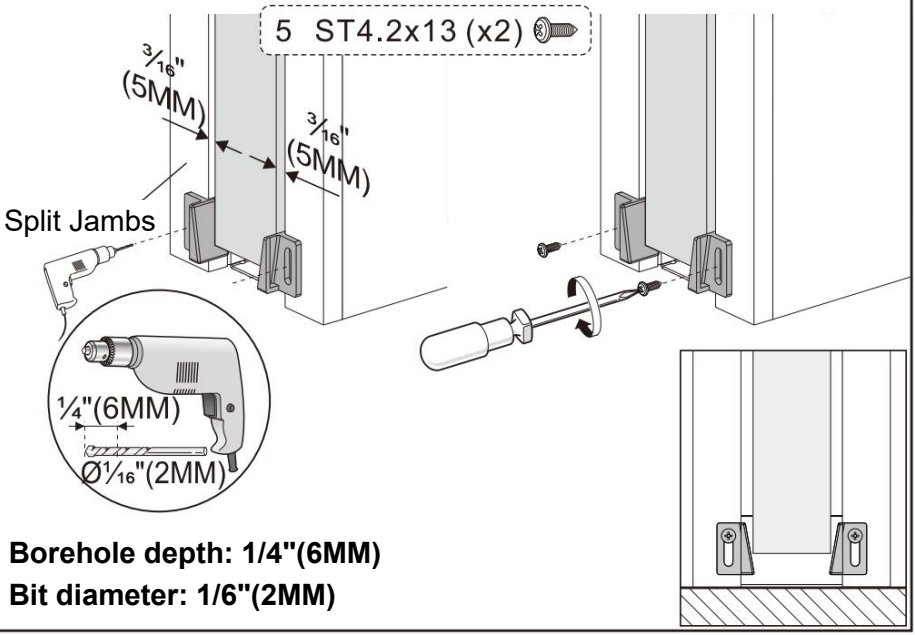

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

1. Avoid prolonged exposure to the sun to avoid aging.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi
Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia
Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way

Schiebetürschiene


MODELL: XC39SF- 5 FUß

Installationsvideo

VEVOR
Upgrade·The Home Creator Way

Sliding Door Track

MODELL: XC39SF-5FT

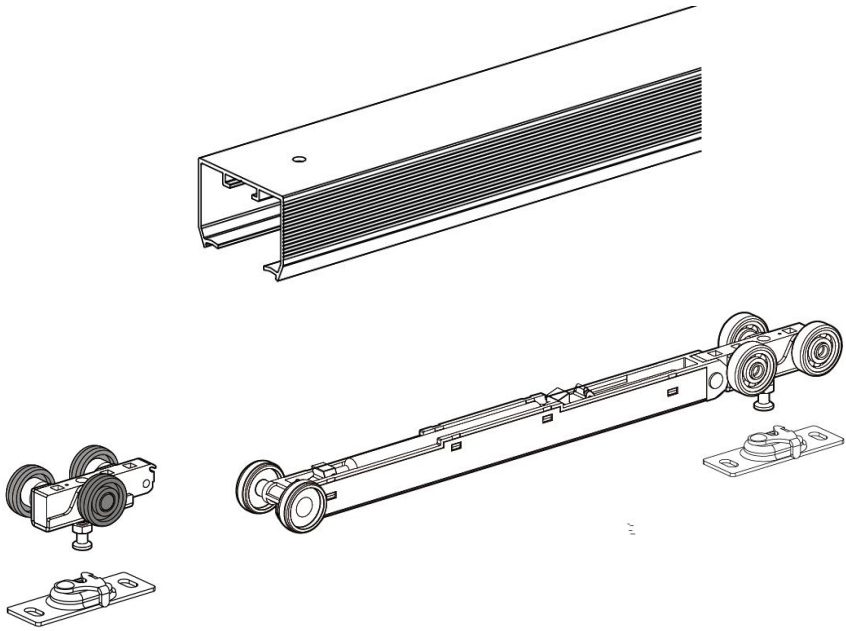

Dies ist die Originalanleitung. Bitte lesen Sie die gesamte Bedienungsanleitung vor der Inbetriebnahme sorgfältig durch. VEVOR behält sich die Auslegung der Bedienungsanleitung vor. Das Aussehen des Produkts kann von dem gelieferten Produkt abweichen. Wir bitten um Verständnis, dass wir Sie nicht erneut über etwaige Technologie- oder Software-Updates informieren werden .

INSTRUCTIONS

Vielen Dank, dass Sie sich für diese Schiebetürschiene entschieden haben **.**

Bitte lesen Sie die gesamte Gebrauchsanweisung vor der Anwendung. Die Informationen helfen Ihnen, optimale Ergebnisse zu erzielen.

Die in diesem Katalog abgebildeten Produkte können farblich vom tatsächlichen Artikel abweichen .

BEWAHREN SIE DIESE ANWEISUNGEN AUF

WARNUNG:

Gewährleistung von Gesundheit und Sicherheit, Einhaltung der Vorschriften der lokalen Behörden und allgemeine Werkstattpraxis

Bei der Verwendung von Werkzeugen werden die Vorschriften eingehalten.

***** Werkzeuge dürfen nicht verwendet werden, wenn sie beschädigt sind.

***** Für optimale und sichere Leistung müssen die Werkzeuge stets in gutem und sauberem Zustand sein.

***** Tragen Sie geeignete Kleidung, um ein Hängenbleiben zu vermeiden. Tragen Sie keinen losen Schmuck und binden Sie lange Haare zusammen.

***** Alle verwendeten Werkzeuge und Teile müssen dokumentiert werden.

***** Wenn Sie außerhalb des Fahrzeugs arbeiten, stellen Sie sicher, dass der Arbeitsplatz sicher und stabil ist.

*** Verwenden Sie** diese Werkzeuge nicht , wenn Sie müde sind oder unter dem Einfluss von Alkohol, Drogen oder berauschenden Medikamenten stehen.

***** WICHTIGER HINWEIS ZUR PERSÖNLICHEN SICHERHEIT!

Tragen Sie stets persönliche Schutzausrüstung.

***** PERSÖNLICHE SCHUTZAUSRÜSTUNG

1. Tragen Sie stets eine Schutzbrille, die Ihre Augen von vorne und von der Seite schützt. Die Augenschutzausrüstung muss je nach Art der ausgeführten Arbeit den Normen CSA Z94.3-07 oder ANSI Z87.1 entsprechen.

2. Tragen Sie Handschuhe, die je nach Arbeitsmaterial Schutz bieten oder die Auswirkungen von Werkzeugvibrationen reduzieren.

CE

Entspricht den einschlägigen Anforderungen der EU-Verordnung (CPR) 305/2011 .

Technische Parameter und Teileliste


Technische Parameter	
Name	Schiebetürschiene
Modell	XC39SF-5FT
Gleisklassifizierung	Single Track
Schiebetürspezifikation	5 Fuß (Einzelspur, Einzelset)
Gleisabmessungen	56,73 Zoll (1441 mm)
Sanftes Schließen	Ja
Tragfähigkeit	88 Pfund (40 kg)
Aussehen Farbe	Silber

(XC39SF-5FT) Teileliste			
Name	Spezifikation	Menge (Stück)	Anmerkungen
Schiene	/	1	Einzel
Benutzerhandbuch	/	1	
Aufhängung (Radbaugruppe)	/	1	Mit Soft-Close-Funktion
	/	1	Ohne Soft-Close-Funktion
Auslösen	/	2	Mitgelieferte Montageschrauben
Bodenführung	/	2	
Stoßstange	/	1	
Schlüssel	/	1	
Allen Schlüssel	/	1	
Wandbefestigungsschrauben	/	9	8 Stück für den tatsächlichen Gebrauch, 1 Stück zusätzlich vom Hersteller
Aufhängungsradschrauben	/	5	4 Stück für den tatsächlichen Gebrauch, 1 Stück zusätzlich vom Hersteller
Schrauben der	/	3	2 Stück für den tatsächlichen Gebrauch, 1 zusätzliches


Anti-Schwingvorrichtung			Stück vom Hersteller
Türstopperschrauben	/	2	1 Stück für den tatsächlichen Gebrauch, 1 zusätzliches Stück vom Hersteller

Installationshandbuch

WERKZEUGE ERFORDERLICH

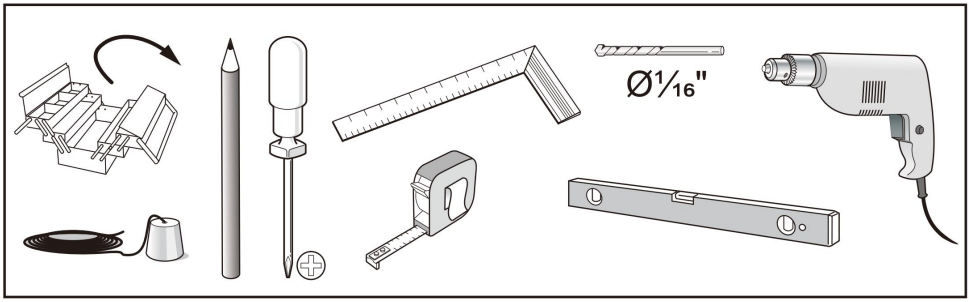

HARDWARE INKLUSIVE

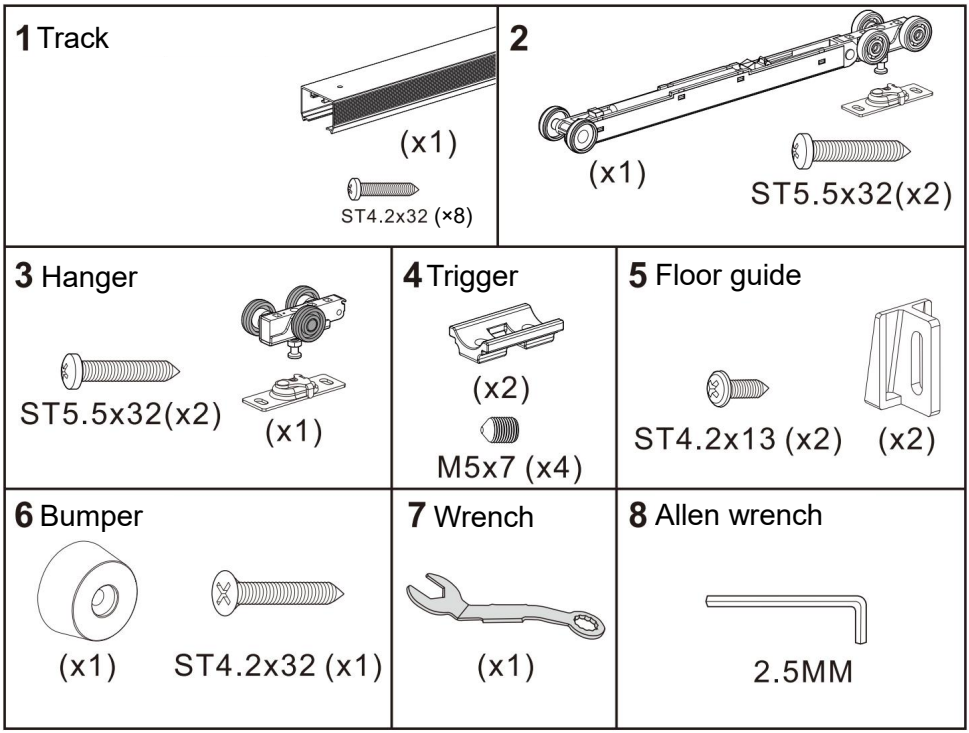


Installation

1 **CONSTRUCT ROUGH OPENING**


6. Header must be SQUARE and PLUMB with tube and LEVEL.
7. Minimum Height is door height plus 3 ¼"(83MM).
8. Width is 2 X Door width plus 1"(25MM).
9. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
10. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

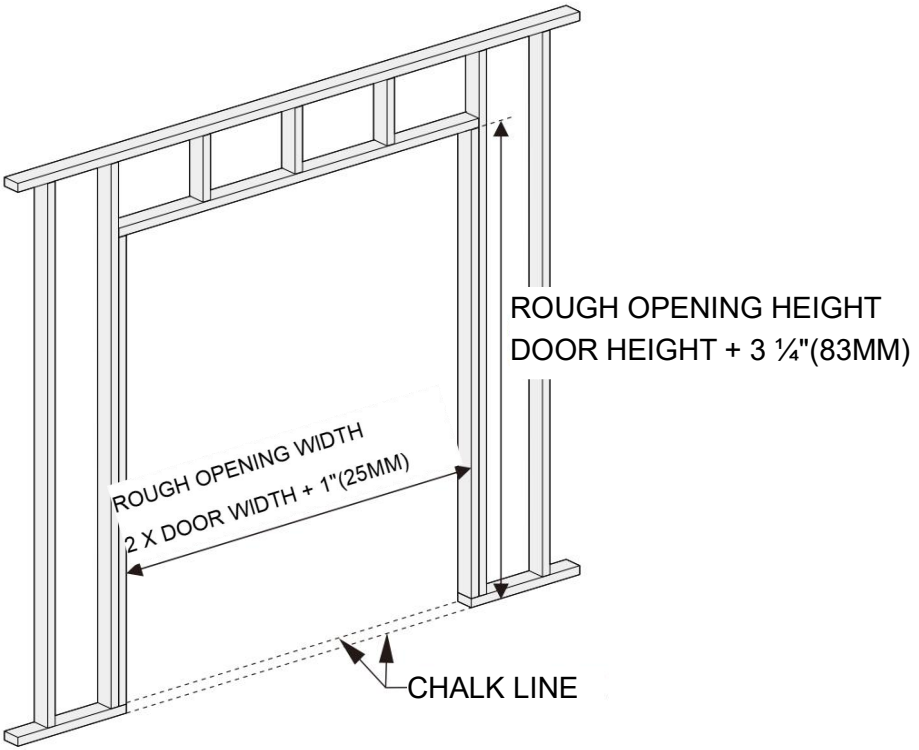

Installation


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

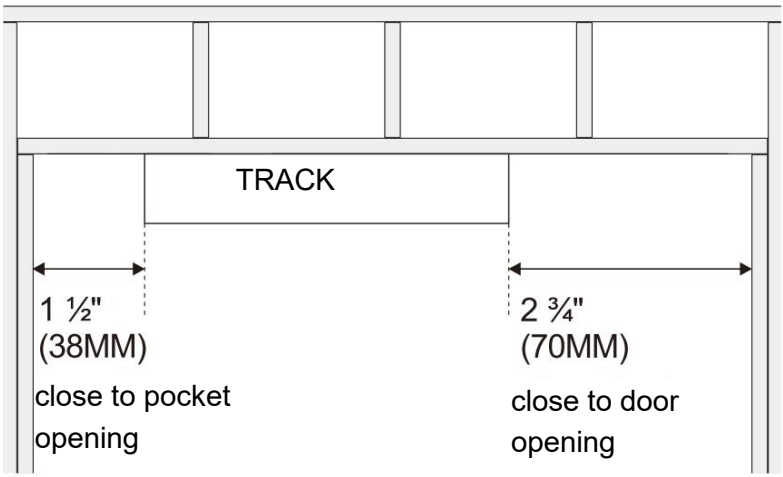

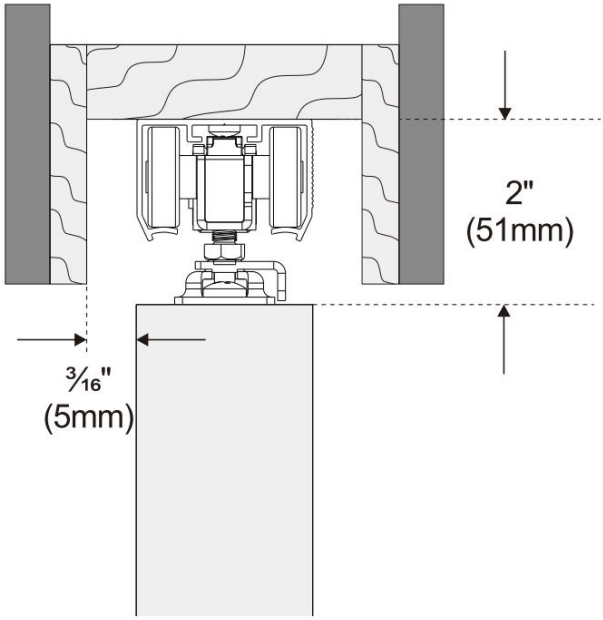


Installation

4 Using a pencil to mark the holes on the wall.

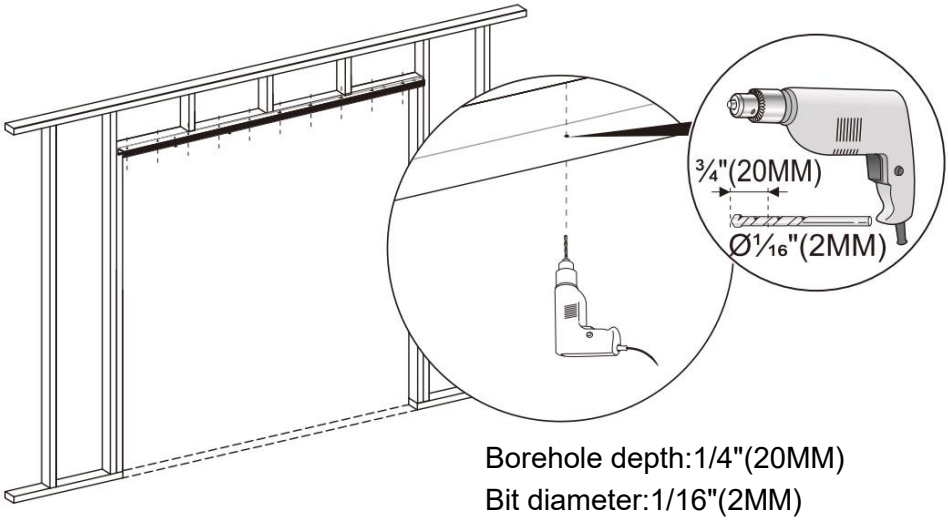


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

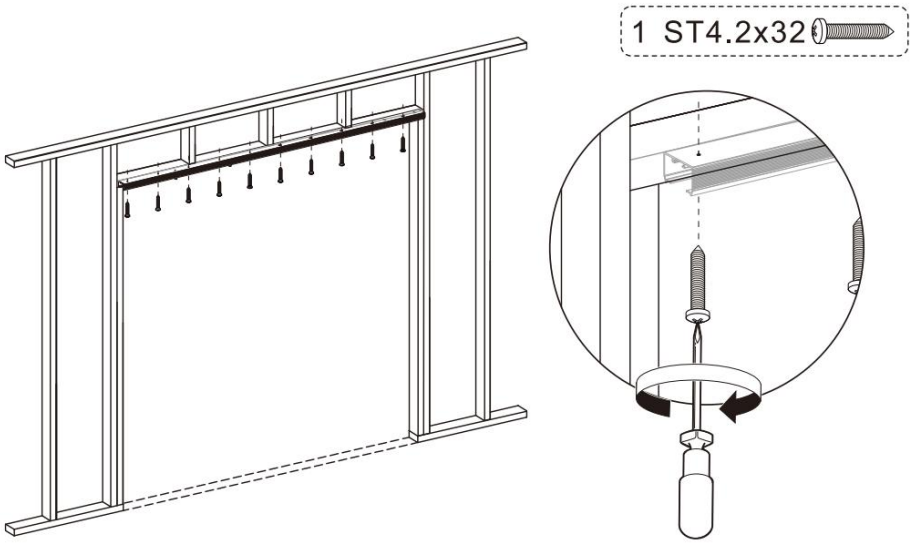

Installation


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

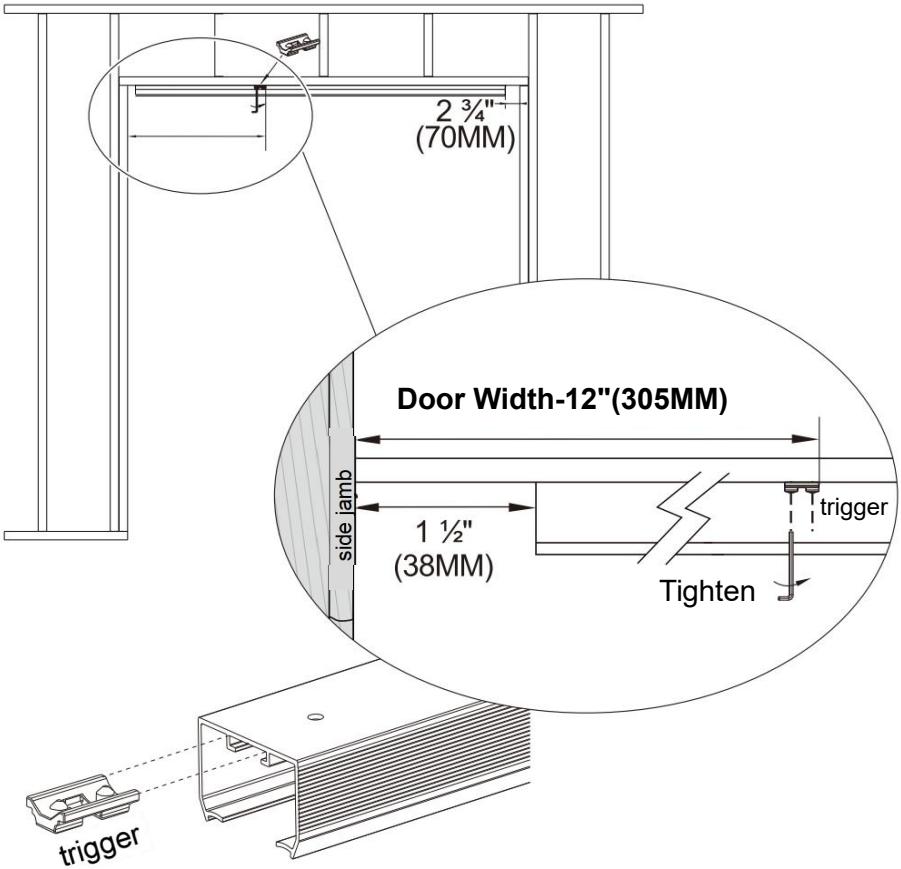

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installation


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

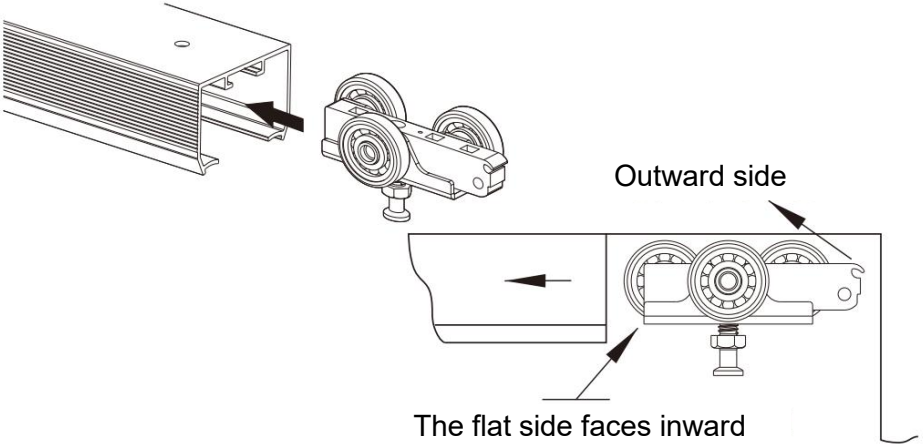

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

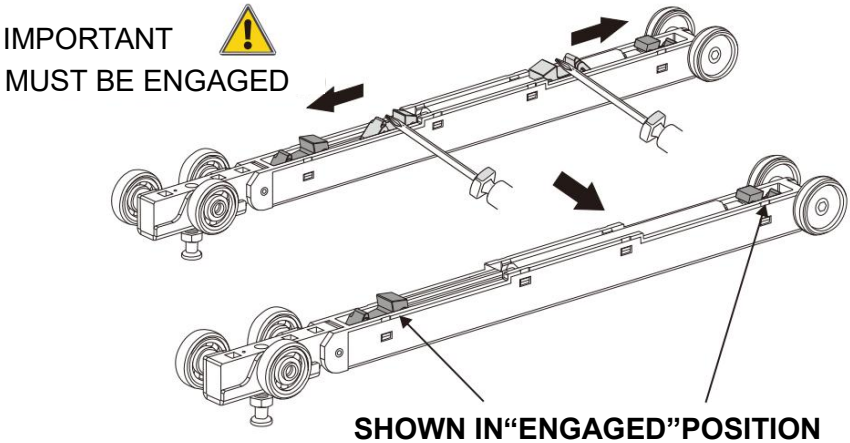


Installation

9

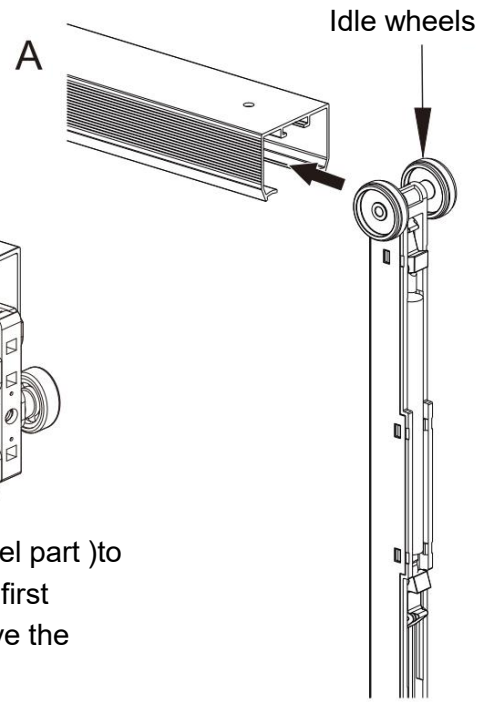

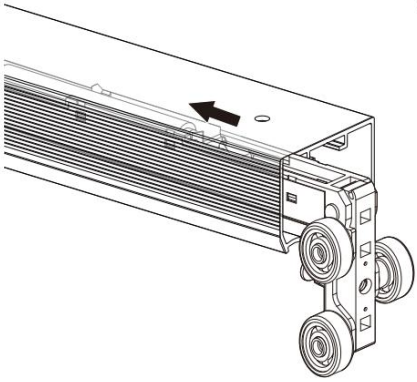


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

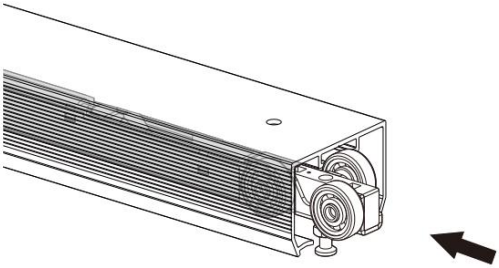





Installation

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

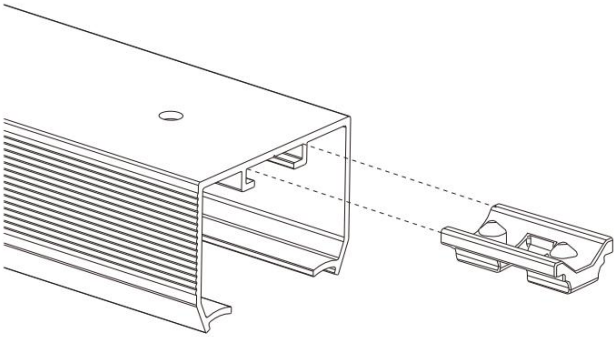

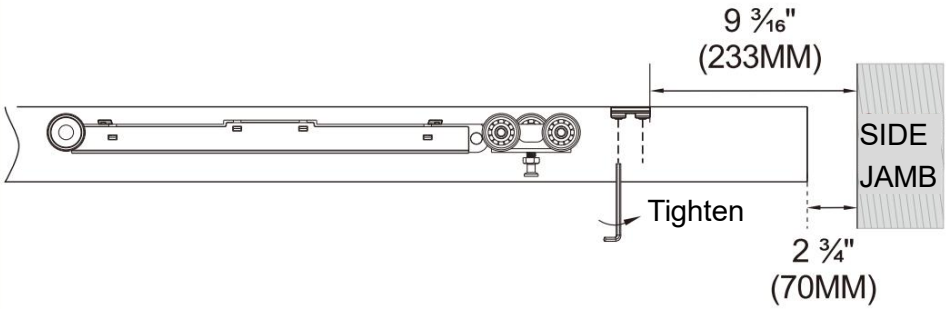




Installation

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

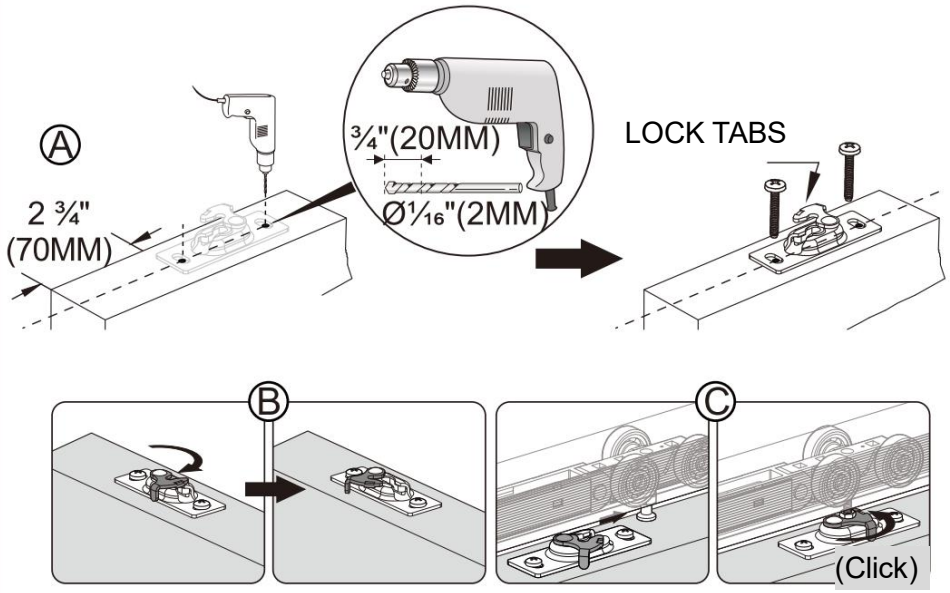

Use spanner to adjust door height.


Installation

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

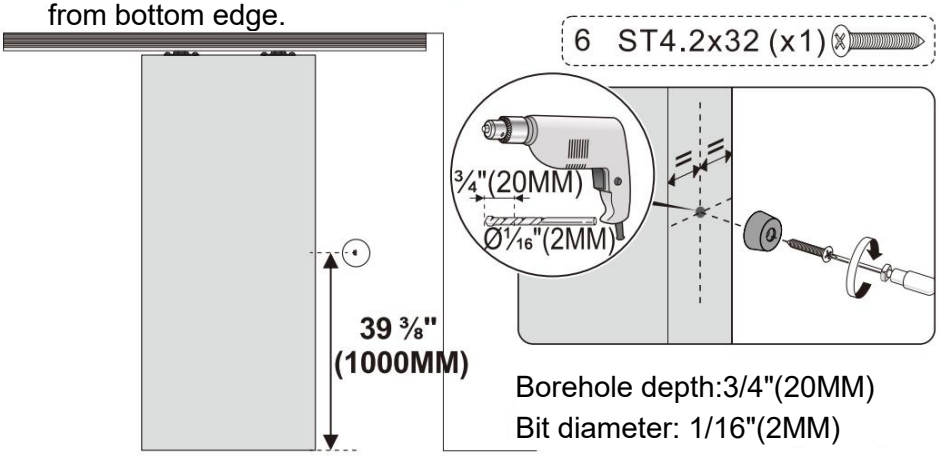

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

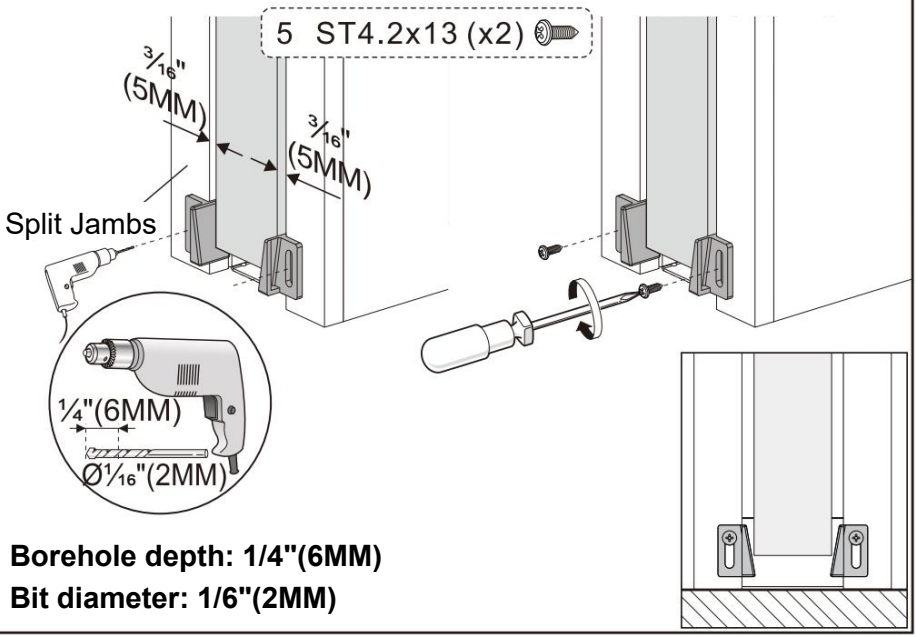

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

2. Um der Hautalterung vorzubeugen, sollte man längere

Sonnenexposition vermeiden.

Hersteller: Shanghaimuxinmuyeyouxiangongsi
Adresse: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200000 CN.
Importiert nach Australien: SIHAO PTY LTD. 1 ROKEVA STREET, EASTWOOD
NSW 2122 Australien
Importiert in die USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Ort, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way


Rail de porte coulissante

MODÈLE: XC39SF - 1,5 M

Vidéo d'installation

Sliding Door Track

MODÈLE: XC39SF-5FT

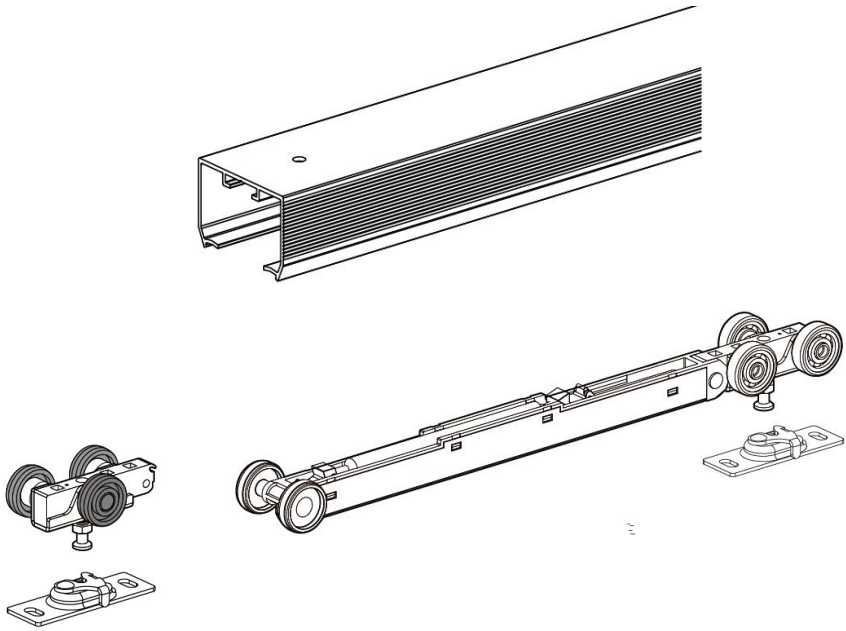

Voici le mode d'emploi original. Veuillez lire attentivement toutes les instructions du manuel avant utilisation. VEVOR se réserve le droit d'interpréter ce manuel à sa guise. L'apparence du produit que vous recevrez peut différer. Nous vous prions de nous excuser si nous ne vous informons pas des mises à jour techniques ou logicielles concernant notre produit.

INSTRUCTIONS

Merci beaucoup d'avoir choisi ce rail de porte coulissante **.**
Veuillez lire attentivement toutes les instructions avant utilisation. Ces informations vous aideront à obtenir les meilleurs résultats possibles.
Les produits présentés dans ce catalogue peuvent avoir une couleur différente de celle du produit réel .

CONSERVEZ CES INSTRUCTIONS
AVERTISSEMENT:
Respectez les règles de santé et de sécurité, les réglementations des autorités locales et les pratiques générales d'atelier.
Les réglementations sont respectées lors de l'utilisation des outils.
***** N'utilisez PAS d'outils endommagés.
***** Maintenir les outils en bon état et propres pour une performance optimale et en toute sécurité.
***** Portez des vêtements adaptés pour éviter d'accrocher le tissu. Ne portez pas de bijoux amples et attachez vos cheveux longs.
***** Indiquez tous les outils et pièces utilisés.
***** Si vous travaillez à l'extérieur du véhicule, assurez-vous que le lieu de travail est sûr et stable.
***** N'utilisez pas ces outils si vous êtes fatigué ou sous l'influence de l'alcool, de drogues ou de médicaments intoxicants.
***** AVERTISSEMENT CONCERNANT LA SÉCURITÉ PERSONNELLE !
Portez toujours un équipement de protection individuelle.
***** ÉQUIPEMENT DE PROTECTION INDIVIDUELLE
1. Portez toujours des lunettes de sécurité à impact offrant une protection frontale et latérale des yeux. L'équipement de protection oculaire doit être conforme aux normes CSA Z94.3-07 ou ANSI Z87.1 selon le type de travail effectué.
2. Portez des gants de protection adaptés aux matériaux utilisés ou permettant de réduire les effets des vibrations des outils.

CE

Conforme aux exigences réglementaires européennes pertinentes (CPR)305/2011 .

Paramètres techniques et liste des pièces


Paramètres techniques	
Nom	Rail de porte coulissante
Modèle	XC39SF-5FT
Classification des pistes	Voie unique
Spécifications des portes coulissantes	5 pieds (voie unique, ensemble unique)
Dimensions de la voie	56,73 " (1441 mm)
Fermeture douce	Oui
Capacité de charge	88 LBS (40 kg)
Apparence Couleur	Argent

Liste des pièces (XC39SF-5FT)			
Nom	Spécification	Qté (pièces)	Notes
Piste	/	1	Célibataire
Manuel de l' utilisateur	/	1	
Support (Ensemble de roue)	/	1	Avec fermeture douce
	/	1	Sans fermeture douce
Déclenchement	/	2	Vis de fixation fournies
Guide des étages	/	2	
Pare-chocs	/	1	
Clé	/	1	
Allen clé	/	1	
Vis de fixation murale	/	9	8 pour une utilisation réelle, 1 supplémentaire fournie par le fabricant
Vis de roue de suspension	/	5	4 pour une utilisation réelle, 1 supplémentaire fournie par le fabricant
Vis du dispositif anti-balancement	/	3	2 pour une utilisation réelle, 1 supplémentaire fournie par le fabricant

Vis de butée de porte	/	2	1 pour l'utilisation réelle, 1 supplémentaire fournie par le fabricant


Manuel d' installation

OUTILS REQUIS

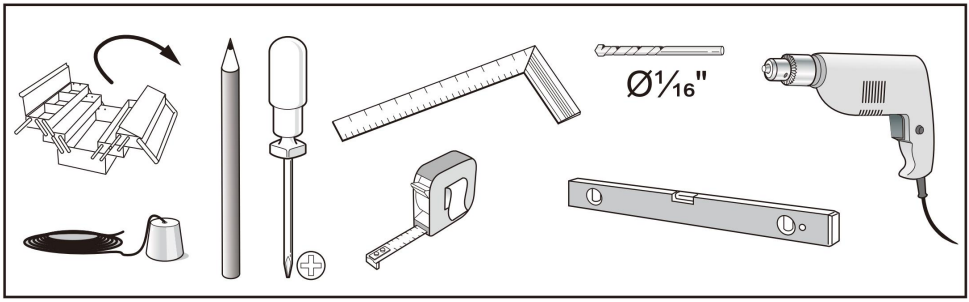

MATÉRIEL COMPRIS

1 Track




(x1)



ST4.2x32 (×8)

2

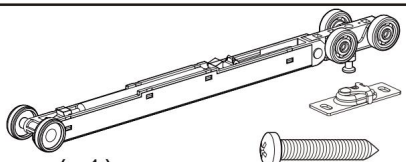


(x1)

ST5.5x32(x2)

3 Hanger



ST5.5x32(x2)



(x1)

4 Trigger



(x2)



M5x7 (x4)

5 Floor guide



ST4.2x13 (x2)




(x2)

6 Bumper




(x1)



ST4.2x32 (x1)

7 Wrench



(x1)

8 Allen wrench




2.5MM

Installation

1 **CONSTRUCT ROUGH OPENING**


11. Header must be SQUARE and PLUMB with tube and LEVEL.
12. Minimum Height is door height plus 3 ¼"(83MM).
13. Width is 2 X Door width plus 1"(25MM).
14. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
15. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

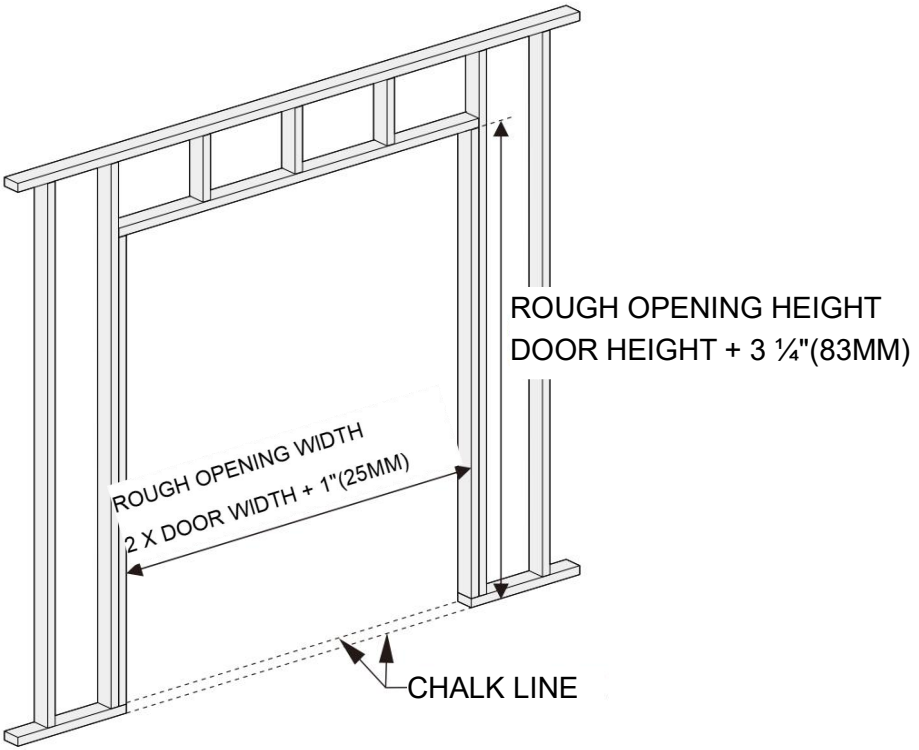

Installation


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

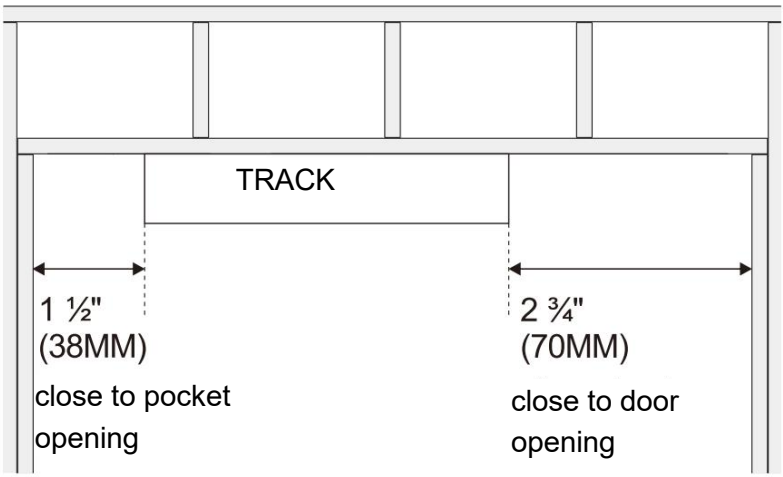

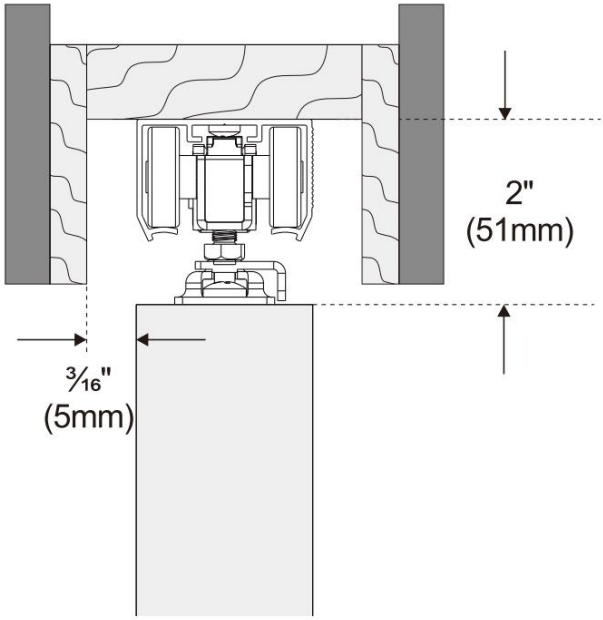


Installation

4 Using a pencil to mark the holes on the wall.

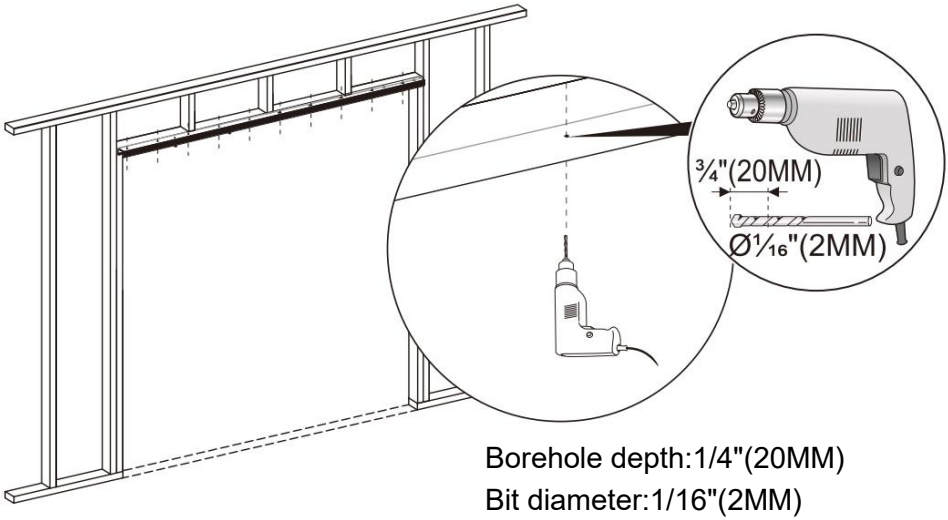


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

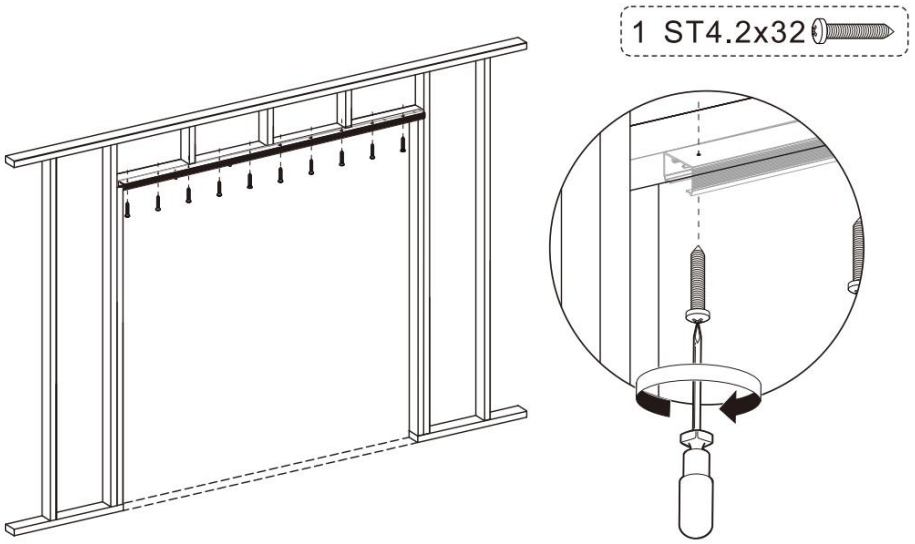

Installation


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

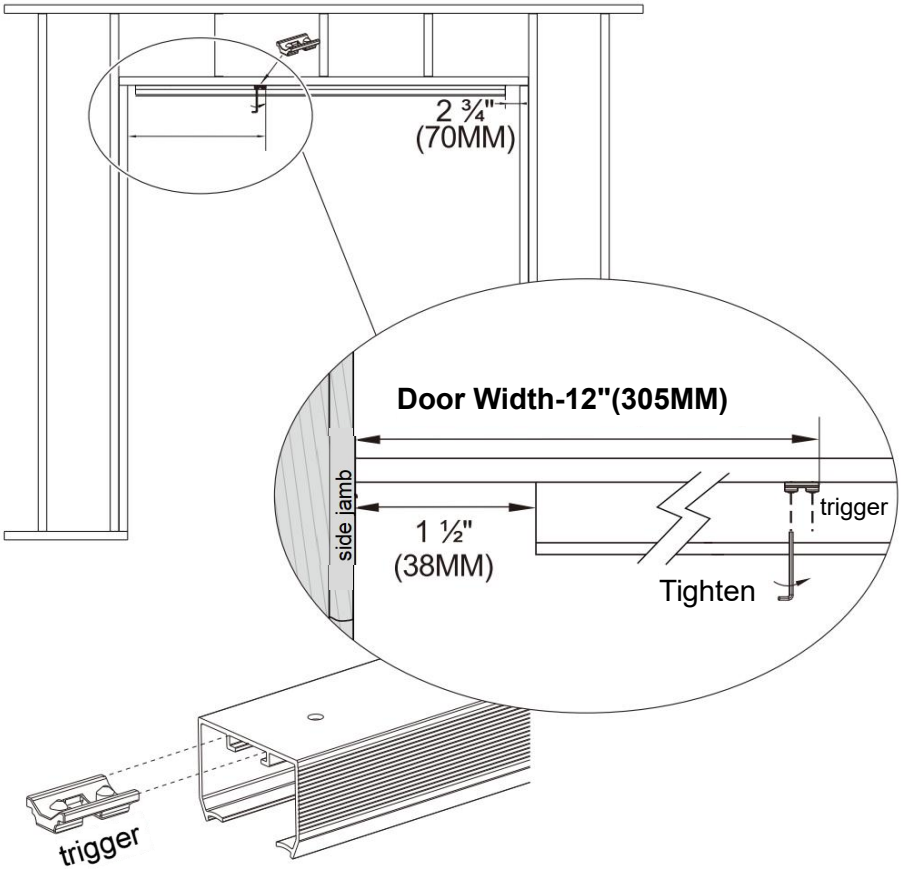

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installation


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

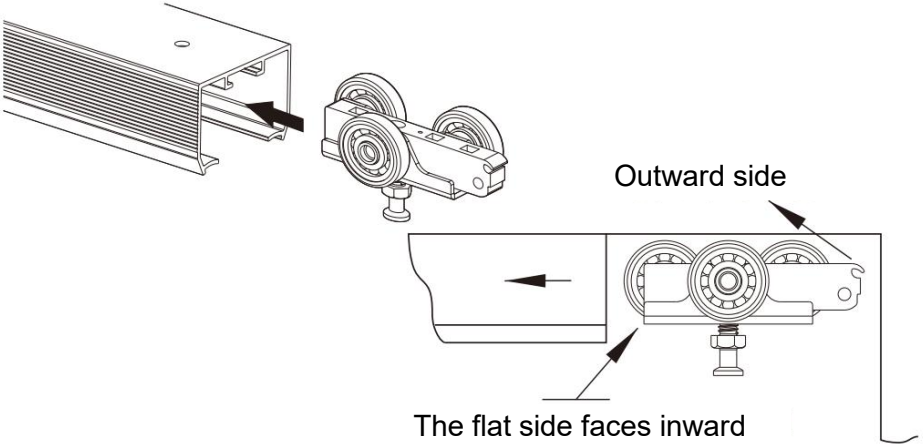

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

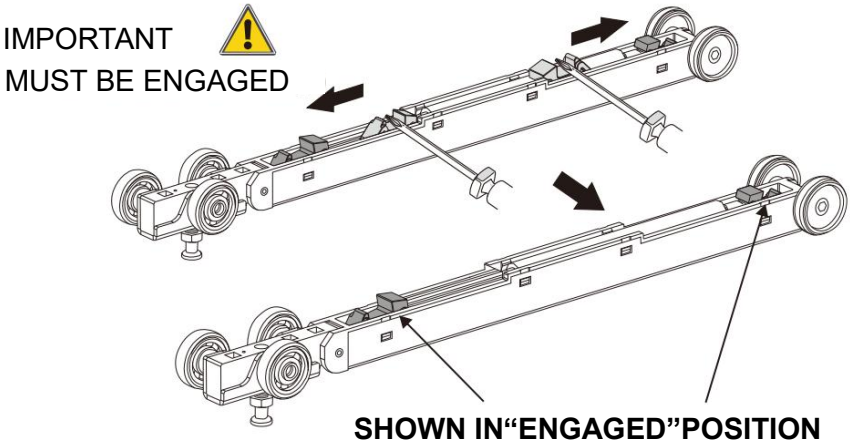


Installation

9

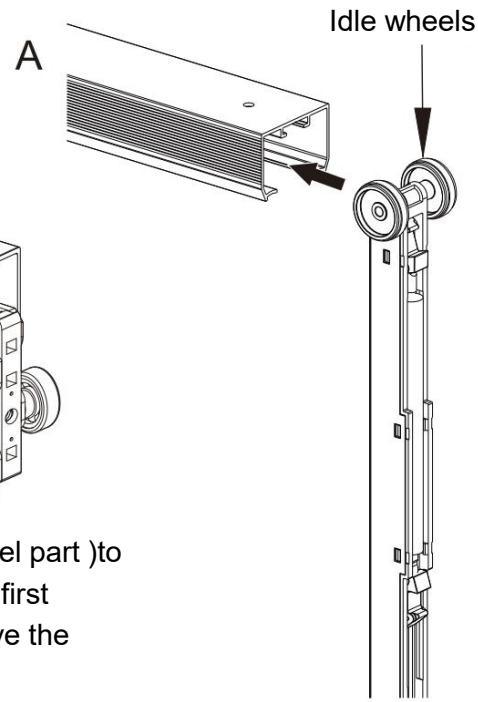

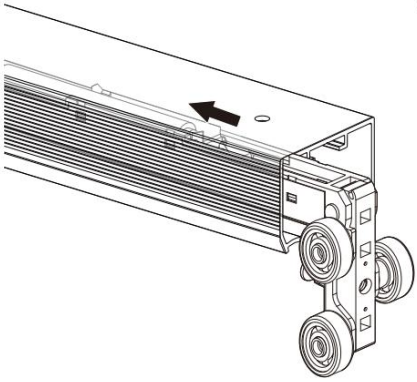


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

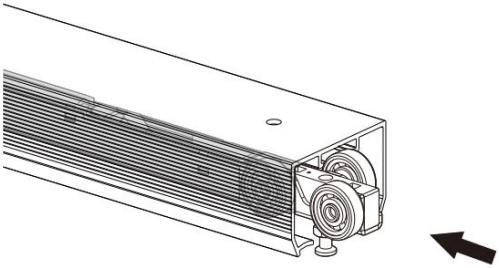





Installation

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

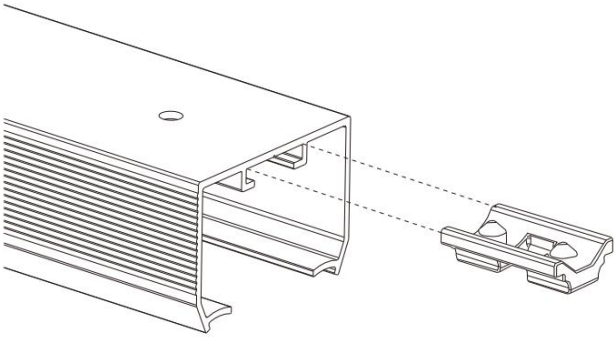

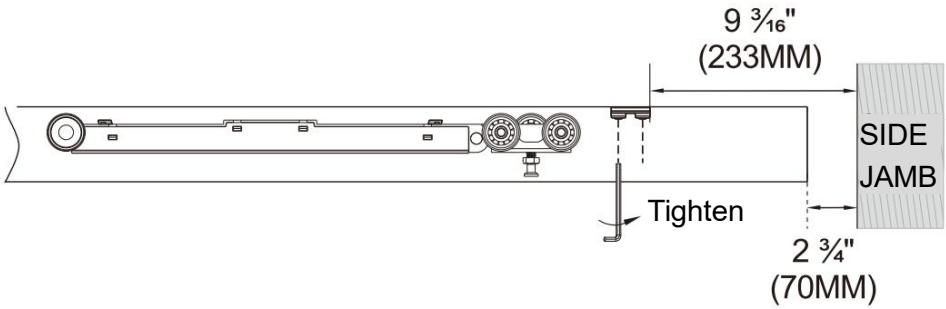




Installation

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

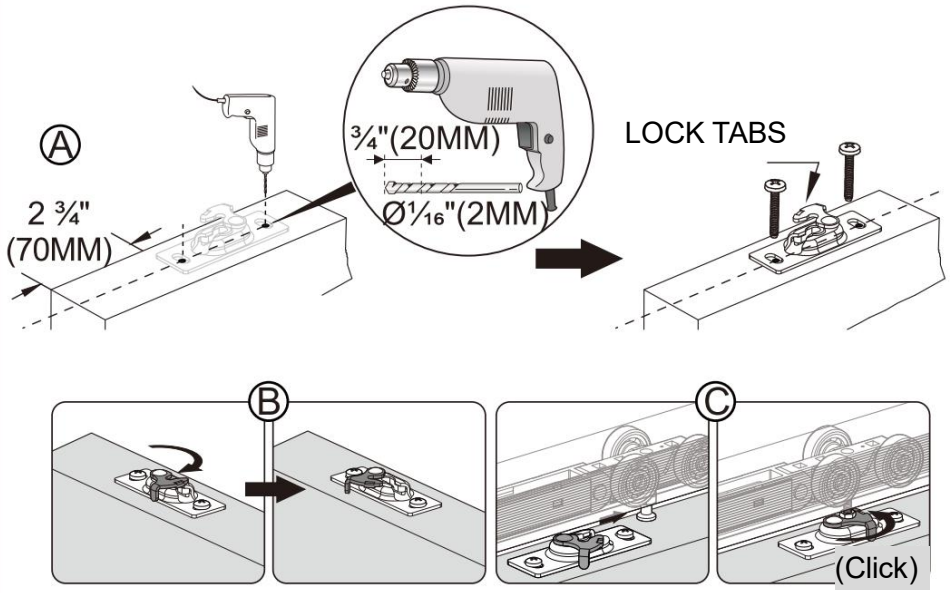

Use spanner to adjust door height.


Installation

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

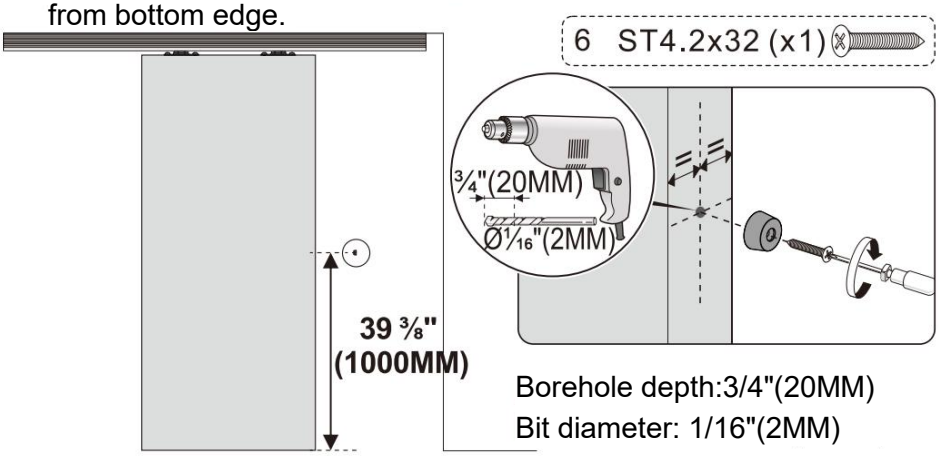

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

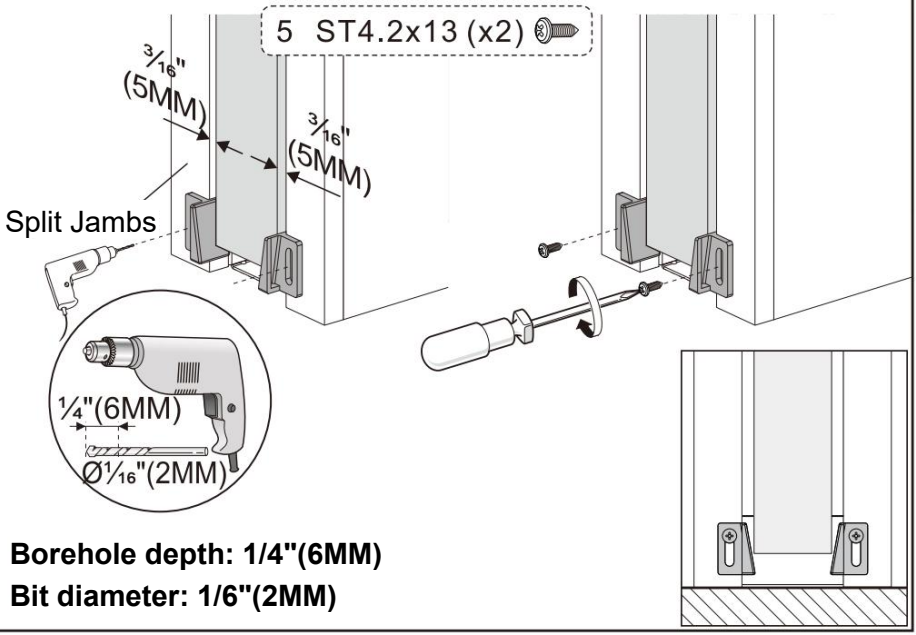

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

3. Évitez une exposition prolongée au soleil pour éviter le vieillissement.

Fabricant : Shanghaimuxinmuyeyouxiangongsi
Adresse : Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, Shanghai 200000 CN.
Importé en Australie : SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australie
Importé aux États-Unis : Sanven Technology Ltd., Suite 250, 9166 Anaheim
Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



VEVOR

Upgrade · The Home Creator Way

Schuifdeurrail


MODEL: XC39SF- 5 FT

Video van de installatie

VEVOR
Upgrade · The Home Creator Way

Sliding Door Track

MODEL: XC39SF-5FT

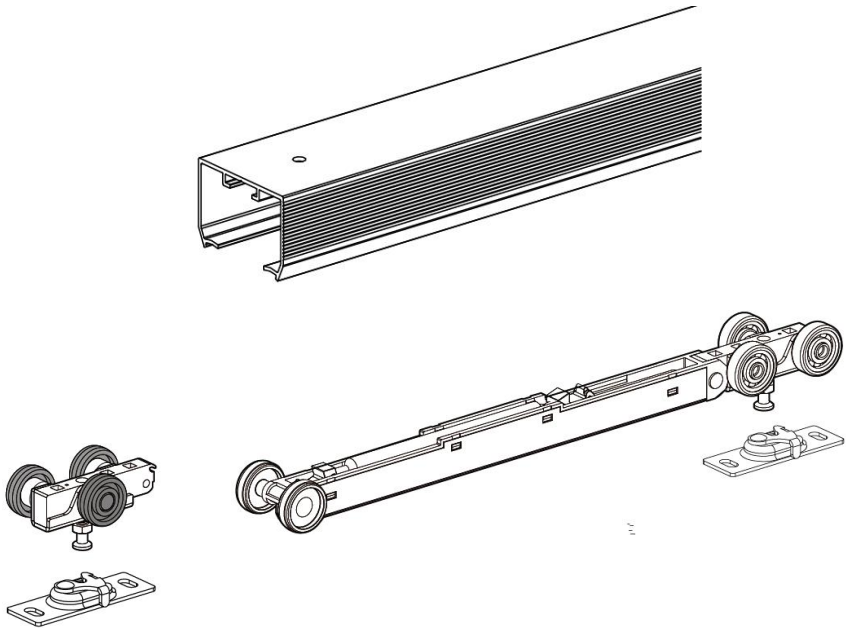

Dit is de originele handleiding. Lees alle instructies zorgvuldig door voordat u het product gebruikt. VEVOR behoudt zich het recht voor om de gebruiksaanwijzing duidelijk te interpreteren. Het uiterlijk van het product is afhankelijk van het product dat u hebt ontvangen. Neemt u het ons niet kwalijk dat we u niet meer op de hoogte stellen van eventuele technologische of software-updates voor ons product.

INSTRUCTIONS

Hartelijk dank dat u voor deze schuifdeurrail hebt **gekozen** .

- Lees alle instructies aandachtig door voordat u het product gebruikt. Deze informatie helpt u de best mogelijke resultaten te behalen.

De in deze catalogus vermelde producten kunnen qua kleur afwijken van het daadwerkelijke artikel .

BEWAAR DEZE INSTRUCTIES

WAARSCHUWING:

Zorg voor gezondheid en veiligheid, lokale autoriteiten en algemene werkplaatspraktijken
bij het gebruik van gereedschap worden de voorschriften in acht genomen.

***** GEBRUIK GEEN gereedschap als het beschadigd is.

***** Zorg ervoor dat het gereedschap in goede en schone staat verkeert voor de beste en veiligste prestaties.

***** Draag geschikte kleding om vasthaken te voorkomen. Draag geen losse sieraden en bind lang haar vast.

***** Houd bij welke gereedschappen en onderdelen u gebruikt.

***** Als u buiten het voertuig werkt, zorg er dan voor dat de werkplek veilig en stabiel is.

*** Gebruik** deze hulpmiddelen niet als u moe bent of onder invloed bent van alcohol, drugs of bedwelmende medicijnen.

***** PERSOONLIJKE VEILIGHEIDSWAARSCHUWING!

Draag altijd persoonlijke beschermingsmiddelen.

***** PERSOONLIJKE BESCHERMINGSMIDDELEN

1. Draag altijd een veiligheidsbril die de ogen aan de voor- en zijkant beschermt. Oogbescherming moet voldoen aan de CSA Z94.3-07- of ANSI Z87.1-normen, afhankelijk van het soort werk dat wordt uitgevoerd.
2. Draag handschoenen die bescherming bieden op basis van het materiaal waarmee wordt gewerkt of om de effecten van gereedschapstrillingen te verminderen.

CE

Voldoet aan de relevante EU-regelgeving (CPR) 305/2011 .

Technische parameters en onderdelenlijst


Technische parameters	
Naam	Schuifdeurrail
Model	XC39SF-5FT
Spoorclassificatie	Enkel spoor
Schuifdeur specificatie	5ft (Enkel spoor, enkele set)
Spoorafmetingen	56,73 inch (1441 mm)
Zacht sluiten	Ja
Laadvermogen	40 kg
Uiterlijk Kleur	Zilver

(XC39SF-5FT) Onderdelenlijst			
Naam	Specificatie	Aantal (stuks)	Notities
Spoor	/	1	Enkel
Gebruikershandleiding	/	1	
Hanger (wielmontage)	/	1	Met Soft Close
	/	1	Zonder softclose
Trekker	/	2	Meegeleverde installatieschroeven
Vloergids	/	2	
Bumper	/	1	
Moersleutel	/	1	
Allen moersleutel	/	1	
Schroeven voor wandmontage	/	9	8 voor daadwerkelijk gebruik, 1 extra van de fabrikant
Schroeven voor het ophangwiel	/	5	4 voor daadwerkelijk gebruik, 1 extra van de fabrikant
Schroeven voor	/	3	2 voor daadwerkelijk gebruik, 1 extra van de fabrikant


anti-sway-apparaat			
Deurstopschroeven	/	2	1 voor daadwerkelijk gebruik, 1 extra van de fabrikant

Installatiehandleiding

HULPMIDDELEN VEREIST

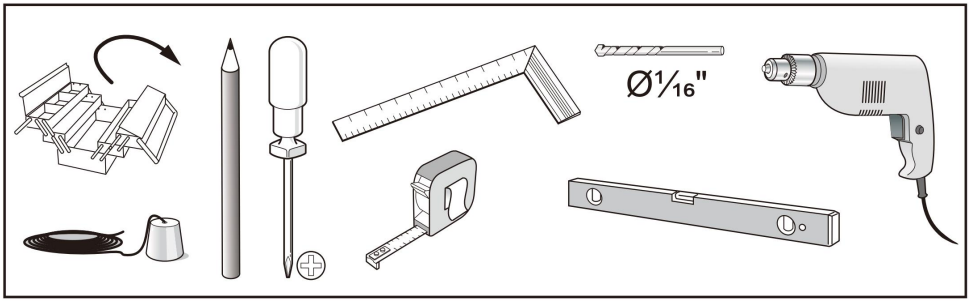

HARDWARE INBEGREPEN

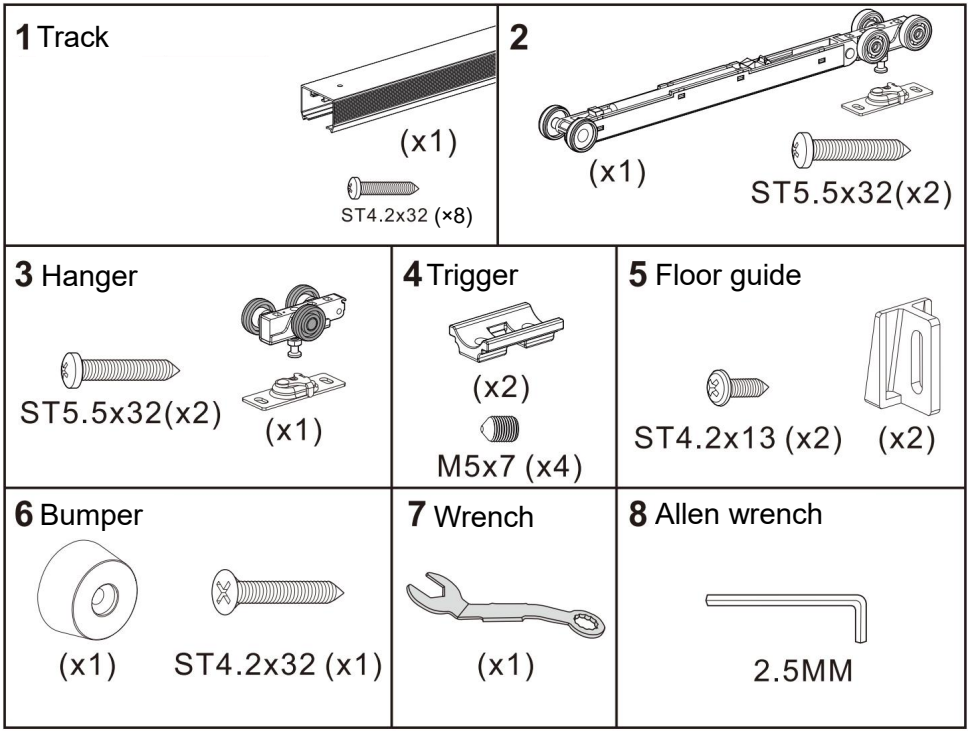


Installatie

1 **CONSTRUCT ROUGH OPENING**


16. Header must be SQUARE and PLUMB with tube and LEVEL.
17. Minimum Height is door height plus 3 ¼"(83MM).
18. Width is 2 X Door width plus 1"(25MM).
19. Fit Door depth: For 1 3/8"(35MM) to 1 3/4"(45MM) Panels.
20. weighing up to 90lbs. (40kgs) each.


2 **Snap a chalk line on floor even with side jambs**

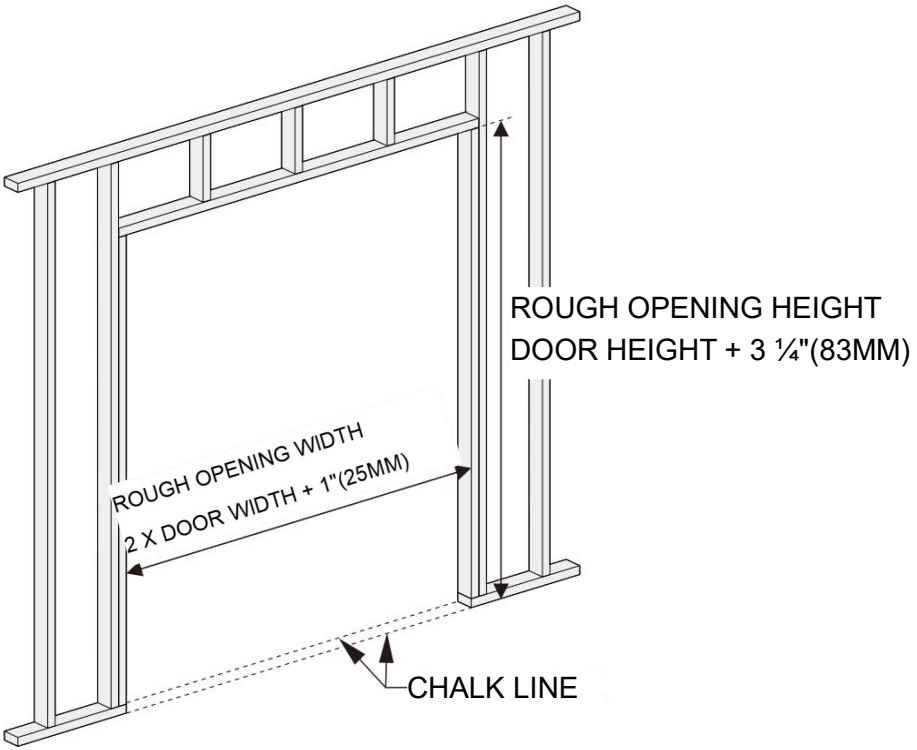

Installatie


3 Pls make a 4 1/4"(108mm) space when instruct the rail.

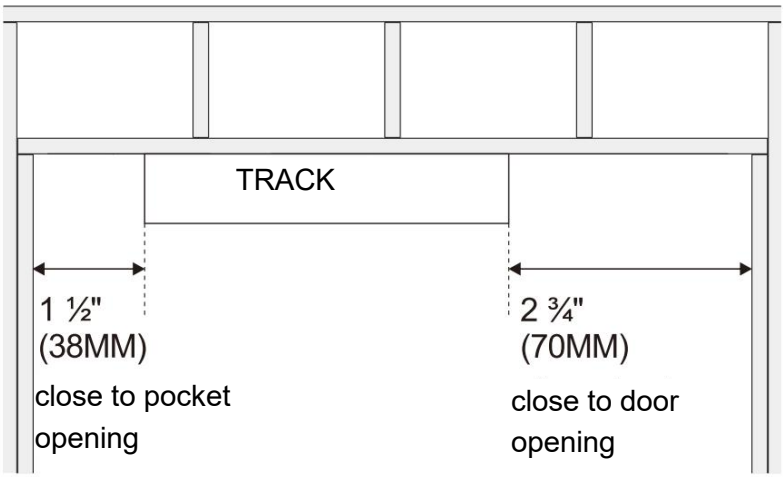

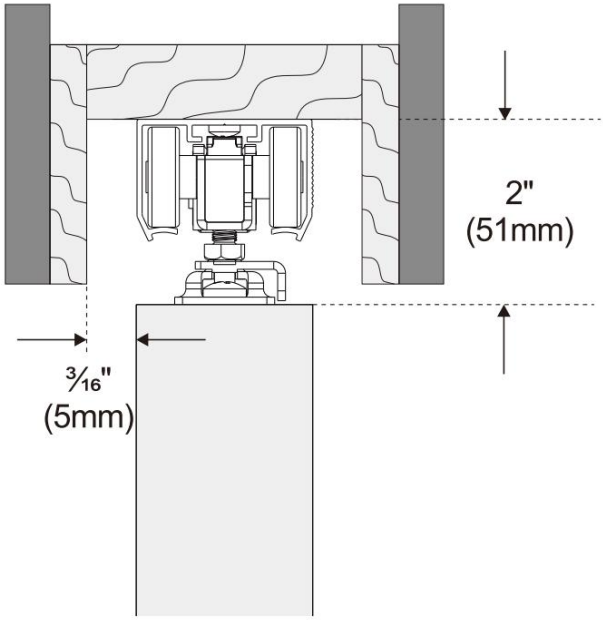


Installatie

4 Using a pencil to mark the holes on the wall.

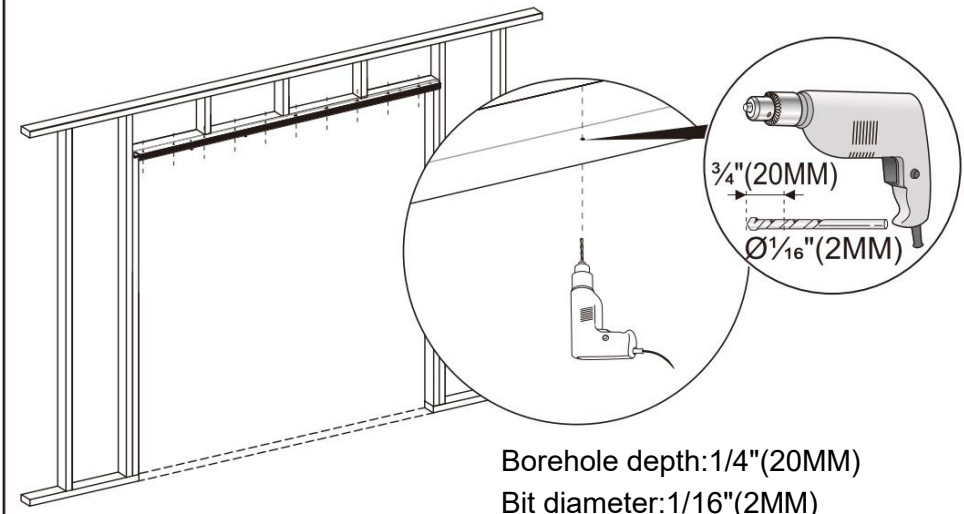


Borehole depth:1/4"(20MM)
Bit diameter:1/16"(2MM)

5 Insert the screw into the hole.

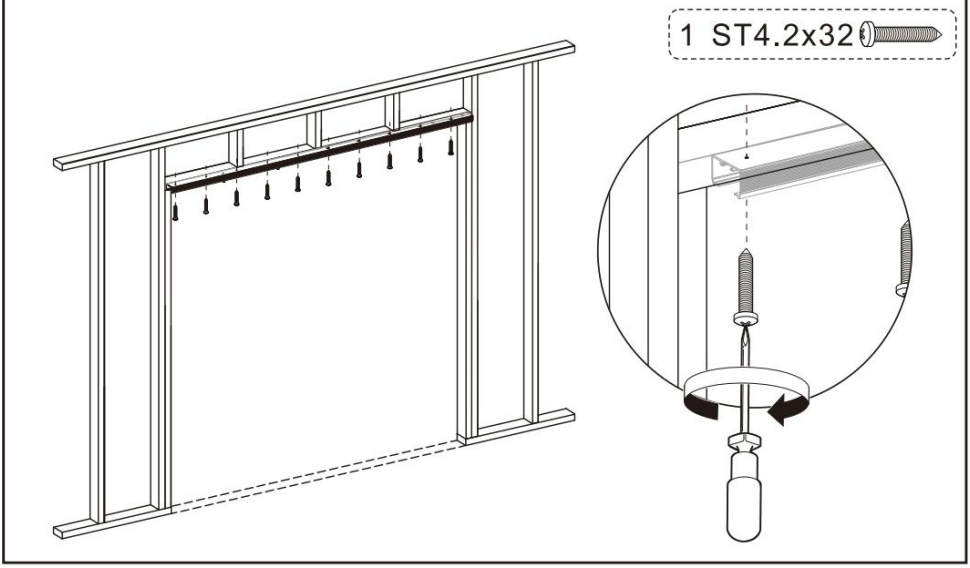

Installatie


6 Place the 1st soft close actuator/trigger into the track and have it **Door Width-12"(305MM)** far from the edge of the side jamb(close to pocket opening)
Tighten it to the track.

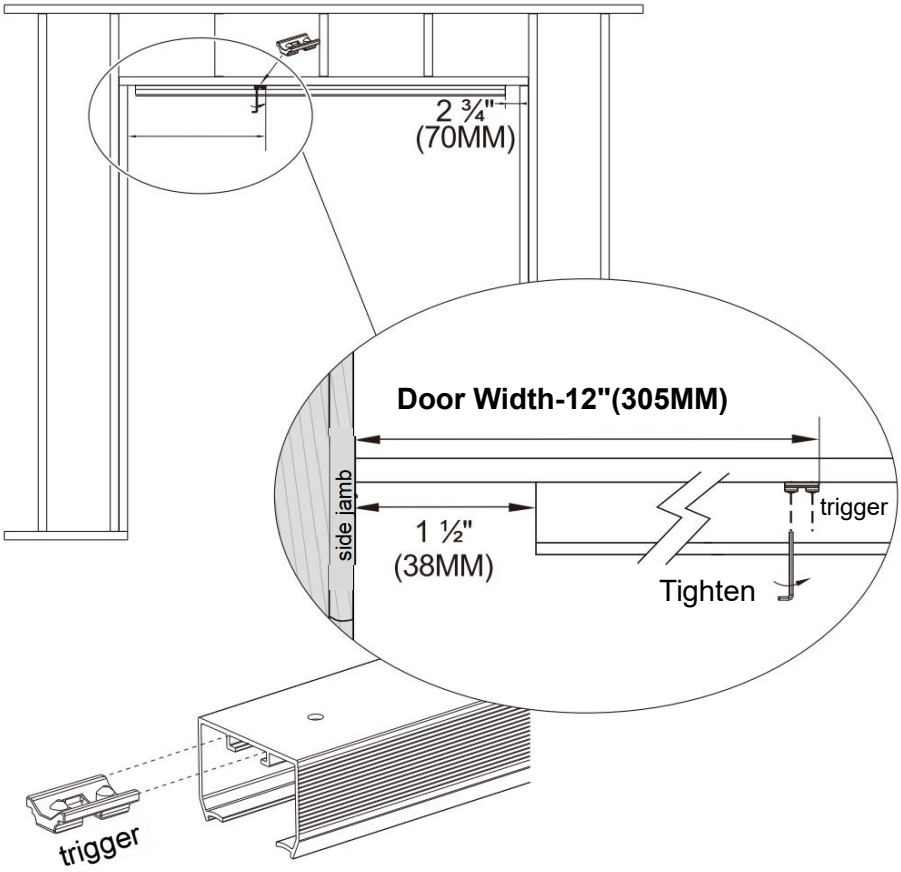

⚠ **Notice:** The position of the soft close actuator/trigger is different with diverse door width.

Installatie


7 Insert Ball Bearing Hanger Wheel assembly into Track,eave untightened as this will be done latter.

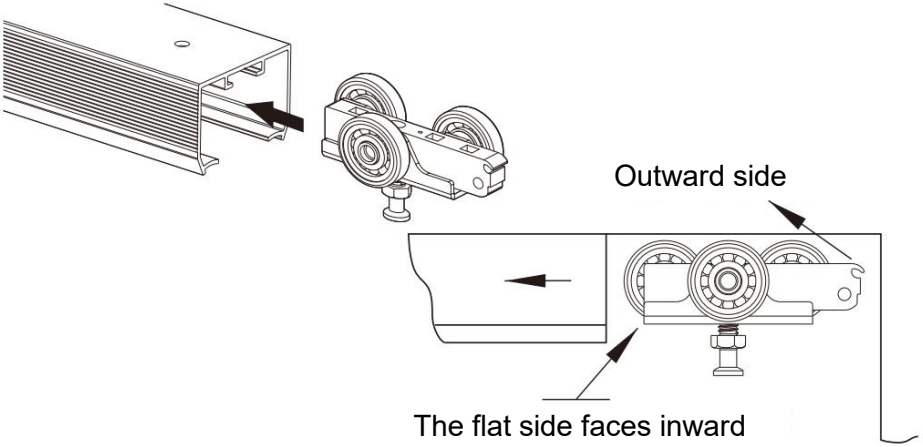

8 Pushing Soft Close Dampener trigger toward "engaged" positions on both side.


Important :Dampener must be **engaged**, or soft close will not work.


If installed incorrectly, Soft Close Dampener may be **damaged** and door will have to be removed, and the installation of Soft Close will have to restart again.

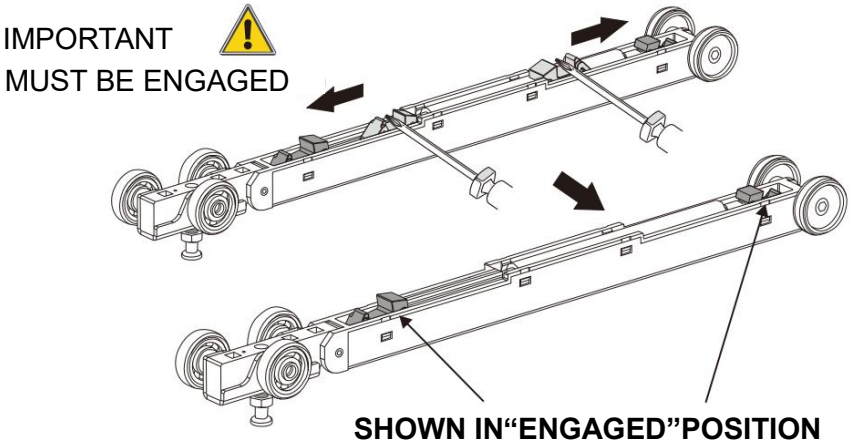


Installatie

9

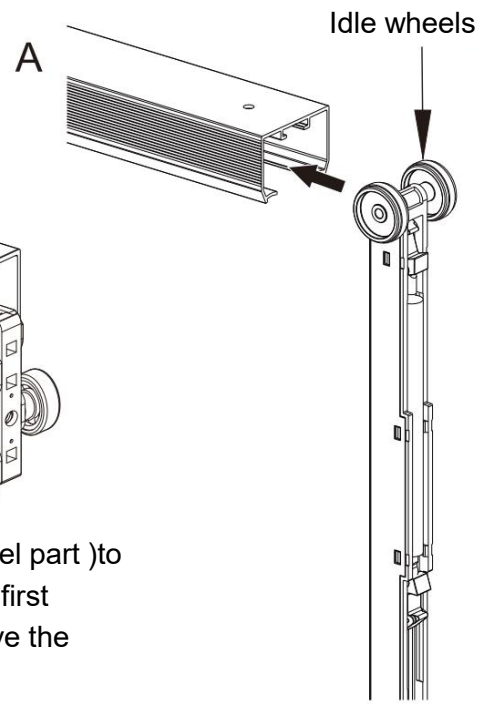

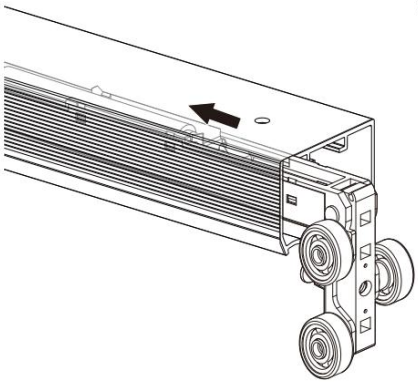


Rotate the hanger (three wheel part)to 90° and move soft close body first inside the track, then also move the hanger inside the track.

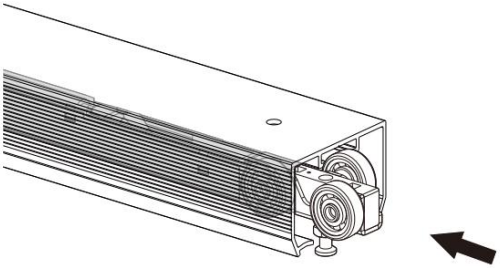





Installatie

10 Place the 2st soft close actuator/trigger into the track and have it 9 3/16"(233MM) far from the edge of the side jamb(close to door opening).
Tighten it to the track.

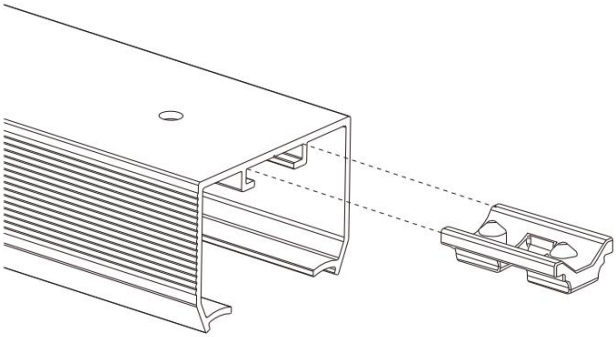

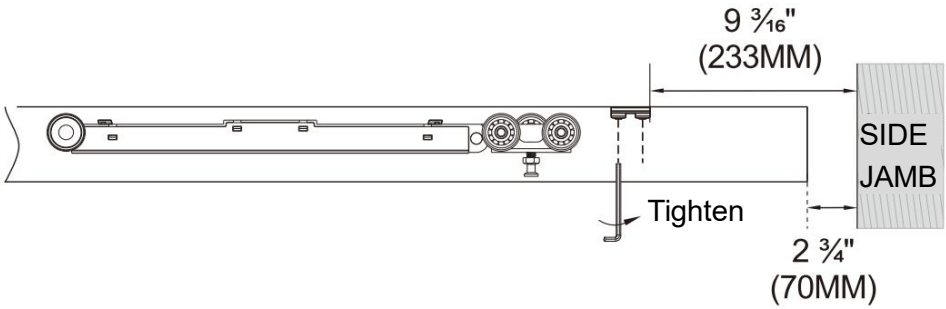




Installatie

11 **AB/Attach** door plates on top of door 2 ¾"(70MM) from each edge with lock tabs on the same side.

CD/Mount door by locating door plate under adjusting bolt of hanger. Lift door and push bolt into door plate, then click the tab in place. Repeat with other hanger/door plate.

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)


2/3 ST5.5x32 (x4)

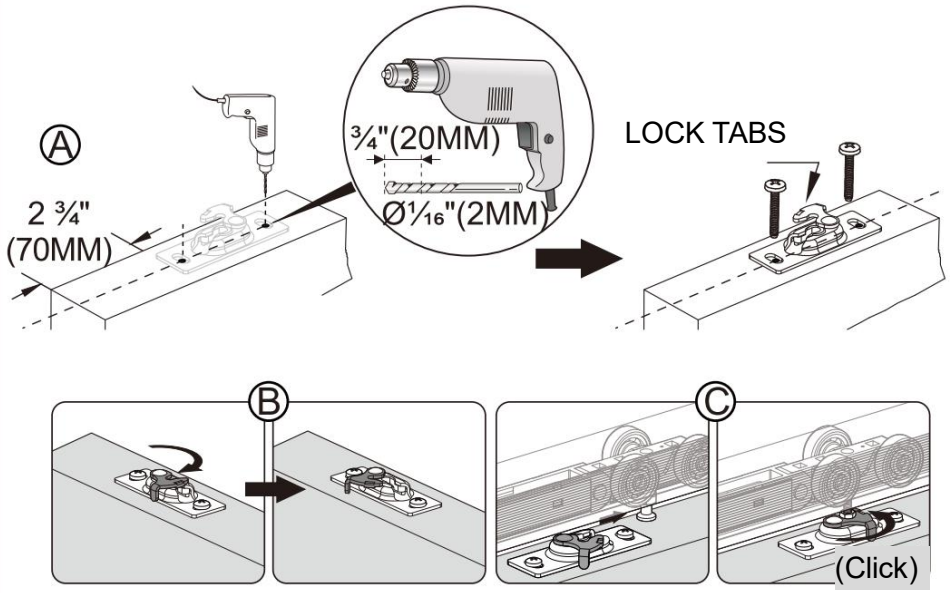

Use spanner to adjust door height.


Installatie

12 Fasten the bumper on back edge of door 39 3/8"(1000MM) from bottom edge.

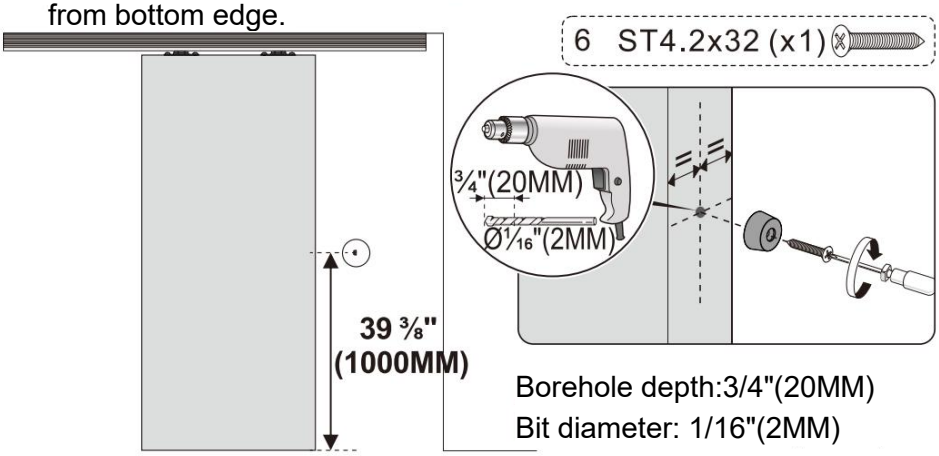

Borehole depth:3/4"(20MM)
Bit diameter: 1/16"(2MM)

13 **Fasten** Guides on finished split jambs at door bottom so door is held in center of opening.

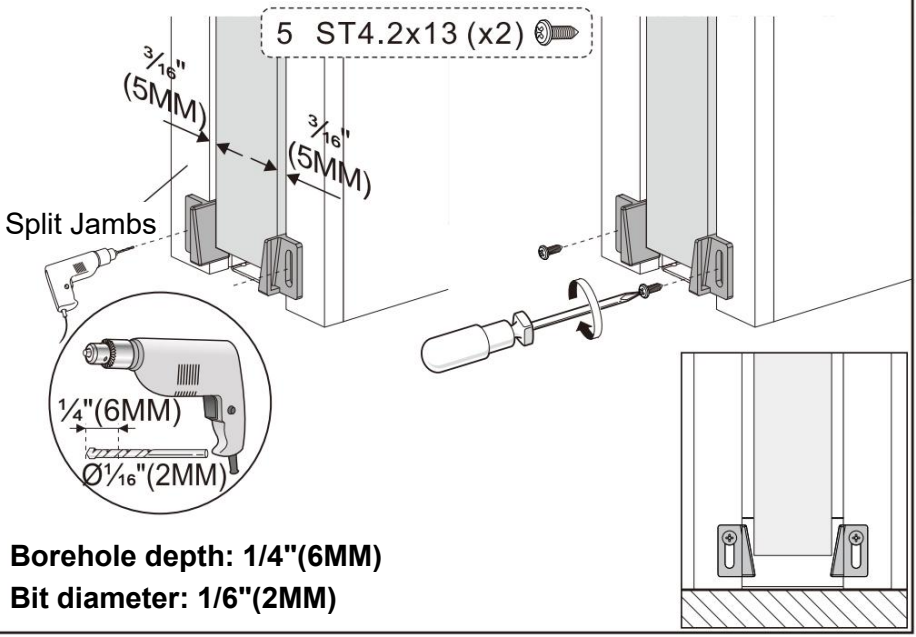

Borehole depth: 1/4"(6MM)
Bit diameter: 1/6"(2MM)

MAINTENANCE

4. Vermijd langdurige blootstelling aan de zon om veroudering te

voorkomen.

Fabrikant: Shanghaimuxinmuyeyouxiangongsi
Adres: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.
Geïmporteerd naar AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD
NSW 2122 Australië
Geïmporteerd naar de VS: Sanven Technology Ltd. Suite 250, 9166 Anaheim
Plaats, Rancho Cucamonga, CA 91730

UK	REP

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.

