


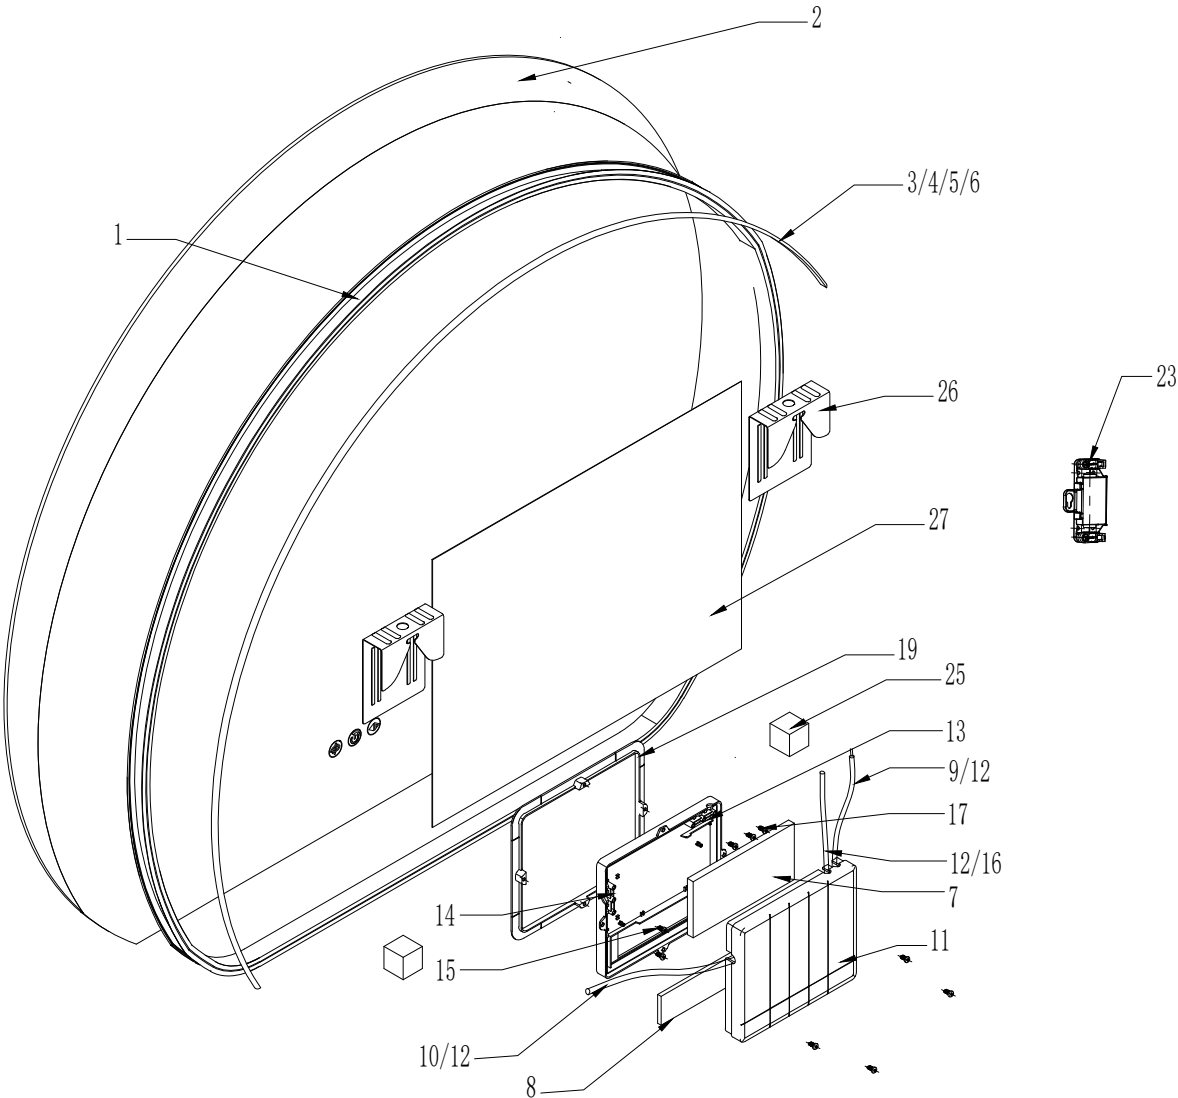

27	Anti-fog film 300*400	220-240Vac/50HZ/2*0.75mm2*200mm/ 300*400mm/4.5MM/IP44/CE	Pcs	1
26	Hanging bracket 25mm	98*80*25mm	Pcs	2
25	EVA foam cotton pad	25*25*25mm	Pcs	2
23	Terminal box	76*41*15mm, IP44 VK-JB+T085M03S(T)	Pcs	1
19	Driver box support	148.2*171.1*10.2mm	Pcs	1
17	M3 tapping screws	M3*16	Pcs	3
16	VDE wire(Waterproof female end)	2*0.75mm2*200mm/white/IP44	Pcs	1
15	M3 tapping screws	M3*10	Pcs	2
14	tension disc	22.5*7.8*3.5mm, PP	Pcs	1
13	Three-hole press buckle	35*7*5mm PP	Pcs	1
12	waterproof plug	φ10*11mm	Pcs	3
11	Driver box	162.7*139.8*24.5mm, UL94-V0	Pcs	1
10	Wire(Waterproof male end)	UL2468/3P/22AWG/length 150mm/A2009HF-3P	Pcs	2
9	VDE wire	2*0.75mm2*500mm, white	Pcs	1
8	Touch panel BCD	BCD/115*34mm*1.2mm	Pcs	1
7	Driver 25W(220V)	AC-DC driver/200-265VAC/12Vdc/25W>85%/PF>0.5/CE/with 5-pin socket/dimming,anti-fog film	Pcs	1
6	φ6 heat shrink sleeve	φ6*200m RSFR-H 125℃ VW-1	Pcs	0.001
5	Wire (Waterproof female end)	UL2468/3p/22AWG/length 600mm/A2009HF-3P	Pcs	1
4	Wire (Waterproof female end)	UL2468/3p/22AWG/length 150mm/A2009HF-3P	Pcs	1
3	LED 1400mm	SMD 2835 168/bicolor/DC12V/≥175LM/W/class D/RA>80/8mm/1400mm/3000K/6500k	Pcs	1
2	Mirror	900*800*4mm	Pcs	1
1	Radiator case frame	830*704*20mm	Pcs	1
Item	Description	Material/Size	Unit	Conso