

Supplier self-declaration form of the packaging conformity to the TR CU 005/2011

We, manufacturer (or representative entity) *Full legal name, full legal address, country*, declare under our sole responsibility that the production range packaging below conforms to the Technical Regulation of Customs Union 005/2011 in it's last version.

List of references :

EAN	Supplier reference	Type of packaging (ex: carton box, metal can)	Country of origin of the packaging	Packaging materials
8421807120821	12082	plastic bag	spain	Polietileno LDPE-TDS-ES
8421807841252	84125	Sin packaging	spain	Sin packaging

M. PASCUAL, S. i.
C/ Apolo, 101
Polig. Can Parellada
08228 TERRASSA

REQUIREMENTS FOR PACKING based on TR CU 005					
Type of packaging	Requirement	Value specified by the manufacturer	Attempted value	Regulation	reference list of standarts

metal packaging	must ensure tightness at internal overpressure of air			TR CU 005 p.5 (6.1)	Test method can be specified by the manufacturer
	must withstand the compressive force in the direction of the vertical axis of the package box				
	the inner lining must be resistant to the product being packaged and (or) withstand sterilization or pasteurization in simulated environments				
	resistant to corrosion				
polymeric packaging	must ensure tightness; - must withstand the specified number of impacts during free fall from a height without destruction (for sealed products, except perfumery and cosmetic products)	1278mN	1278mN	TR CU 005 p.5 (6.3)	Test method can be specified by the manufacturer

M. PASCUAL S.L.
C/ Apollonio, 101
Polig. Can Parellada
08228 TERRASSA

must withstand the compressive force in the direction of the vertical axis of the package body (except polybags)			Test method can be specified by the manufacturer
should not deform and crack when exposed to hot water (except polybags)			
the packaging handles must be firmly attached to it and withstand the specified load;	21.4mPa	21.4mPa	
the welded and glue seams of the packaging must not allow water to pass through	610%	610%	
must withstand the established static tensile load (polybags only) ;	610%	610%	

paper/carton packaging	must withstand the specified number of impacts during free fall and (or) when tested for horizontal impact	100.000	100.000	TR CU 005 p.6.4	GOST ISO 2234-2014 (based on ISO 2234:2000)- Stacking tests using a static load GOST ISO 2244-2013 (based on ISO 2244:2000) Horizontal

M. PASCHEN
 C. ANNO
 Polg. Can. P. 10/11
 08228 TERESA

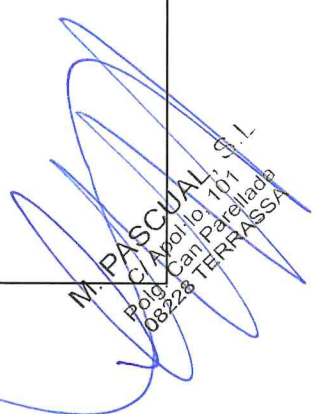
	must withstand the compressive force in the direction of the vertical axis of the package body and (or) provide strength when stacked;	Si	si		impact test methods
	packaging handles (if any) must be firmly attached to the packaging and must be able to withstand the specified load	si	si		
combined materials	must be airtight (in the presence of closures) or ensure the established strength of the joint seams			TR CU 005 p.6.5	GOST ISO 1924-1-96 - Paper and board. Determination of tensile properties. Part 1. Constant rate of loading method
	the surface of the inner coating must not be oxidized				
	the inner surface of the package must be resistant to the effects of the product being packaged.				


M. PASCUAL S.L.
C/ República, 101
Pol. Camparellada
08228 TERRASSA

textile packaging	must withstand the specified number of impacts during free fall from a height without destruction			TR CU 005 p.6.6	Test method can be specified by the manufacturer
	must withstand the specified breaking load.				
wood packaging	must withstand the specified number of impacts during free fall from a height without destruction			TR CU 005 p.6.7	GOST ISO 2234-2014 (based on ISO 2234:2000)- Stacking tests using a statis load GOST ISO 2244-2013 (based on ISO 2244:2000) Horizontal impact test methods GOST 18211-2018 (basec on ISO 12048:1994)- Transport packages. Compression test method
	must withstand the specified number of impacts on horizontal or inclined planes				
	must withstand the compressive force in the direction of the vertical axis of the package body				
	the moisture content of the wood must correspond to the established				

M. PASQUAL S.L.
C/ M. de la Torre, 101
Pob. Can Parellada
08228 TERRASSA

ceramic packaging	must be waterproof			TR CU 005 p.6.8	Test method can be specified by the manufacturer
	must be airtight when sealed				
glass packaging	must withstand internal hydrostatic pressure, depending on the main parameters and purpose			TR CU 005 p.6.2	Test method can be specified by the manufacturer
	must withstand temperature differences without destruction				
	must withstand a compressive force in the direction of the vertical axis of the package body (except bottles)				
	water resistance of glass must be at least 3/98 class (for food products, including baby food, perfumery and cosmetic products)	N/A	N/A		
	Must be acid resistant (for cans and bottles for canning, food acids and baby food);	N/A	N/A		


 M. PASCUAL S.L.
 Pol. C. Av. 101
 C/ Can Parellada
 08228 TERRASSA

should not be reused for contact with baby food	N/A	N/A		
--	-----	-----	--	--

M. PASCUAL S.
Pol. Can Perellada
08228 TERRASSA