
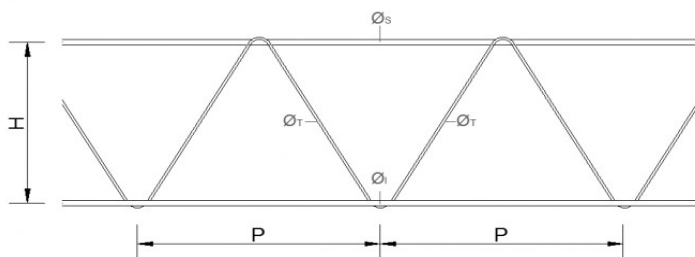


Designación	FORMATO EN LARGO				6.000	(mm)			
	Altura H (mm)	Superior ØS (mm)	Inferior ØI (mm)	Transversal ØT (mm)		Peso Kg/m	Paquete		
							Uds.	mts.	Tm.
H08 555	80	5	5	4	0,728	100	600,0	0,437	
H08 666	80	6	6	4	0,932	100	600,0	0,559	
H09 666	90	6	6	4	0,944	100	600,0	0,566	
H10 555	100	5	5	4	0,753	100	600,0	0,452	
H10 666	100	6	6	4	0,957	100	600,0	0,574	
H10 888	100	8	8	4	1,476	100	600,0	0,886	
H12 555	120	5	5	4	0,781	100	600,0	0,469	
H12 565	120	6	5	4	0,849	100	600,0	0,510	
H12 666	120	6	6	4	0,985	100	600,0	0,591	
H12 888	120	8	8	4	1,504	100	600,0	0,903	
H12 101010	120	10	10	4	2,170	100	600,0	1,302	
H14 555	140	5	5	4	0,812	100	600,0	0,487	
H14 666	140	6	6	4	1,016	100	600,0	0,609	
H14 888	140	8	8	4	1,535	100	600,0	0,921	
H14 101010	140	10	10	4	2,201	100	600,0	1,320	
H15 666	150	6	6	4	1,032	100	600,0	0,619	
H16 666	160	6	6	4	1,048	100	600,0	0,629	
H17 666	170	6	6	4	1,064	100	600,0	0,639	
H18 666	180	6	6	4	1,081	100	600,0	0,649	
H20 666	200	6	6	4	1,116	100	600,0	0,669	
H20 777	200	7	7	4	1,356	100	600,0	0,813	
H20 888	200	8	8	4	1,635	100	600,0	0,981	
H22 666	220	6	6	4	1,151	100	600,0	0,691	
H23 666	230	6	6	4	1,169	100	600,0	0,701	
H24 666	240	6	6	4	1,187	100	600,0	0,712	
H24 676	240	7	6	4	1,267	100	600,0	0,760	
H25 666	250	6	6	4	1,205	100	600,0	0,723	
H27 666	270	6	6	4	1,242	100	600,0	0,745	
H28 666	280	6	6	4	1,260	100	600,0	0,756	
H30 666	300	6	6	4	1,297	100	600,0	0,778	



ØT = 4,0 (mm)

B = 80 (mm)

P = 200 (mm)

Acero Calidad B500T